
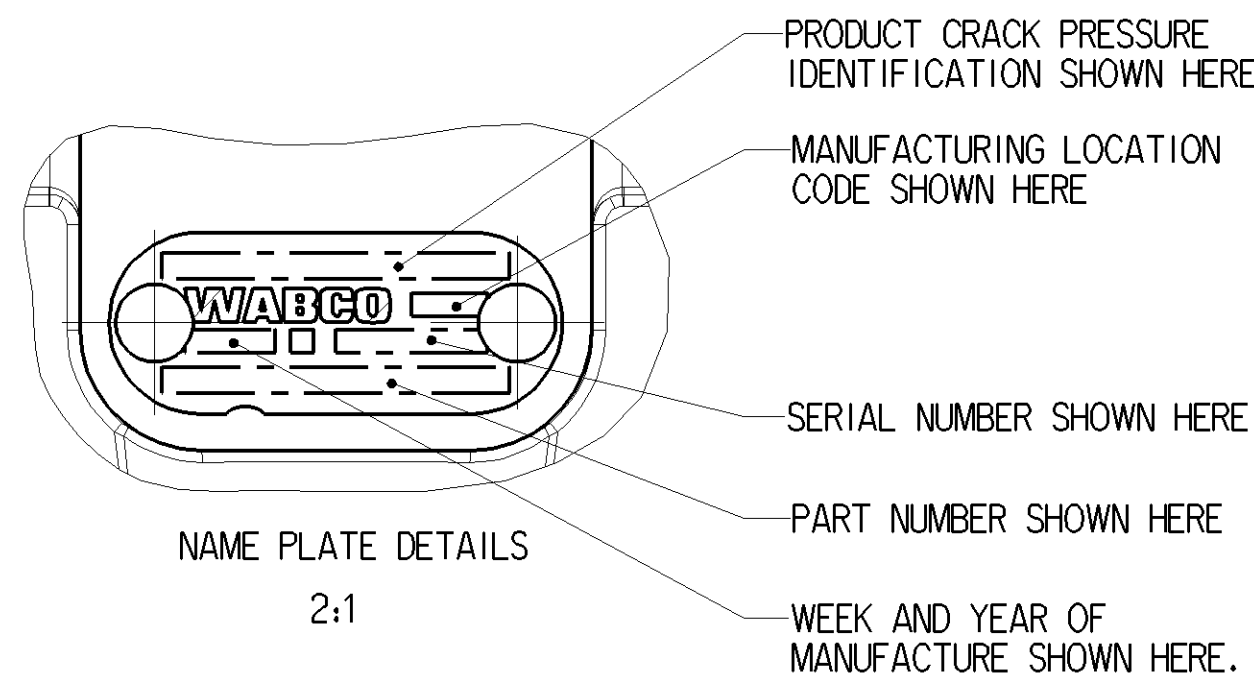


SURFACE PROTECTION	
I	JED-256-5
II	JED-007-3
III	PLASTIC/RUBBER

2-DELIVERY PORT
3/8"-18 NPTF
L1 & L3 LIMITS
CUSTOMER TO ENSURE
TORQUE 47.5±2.5 Nm

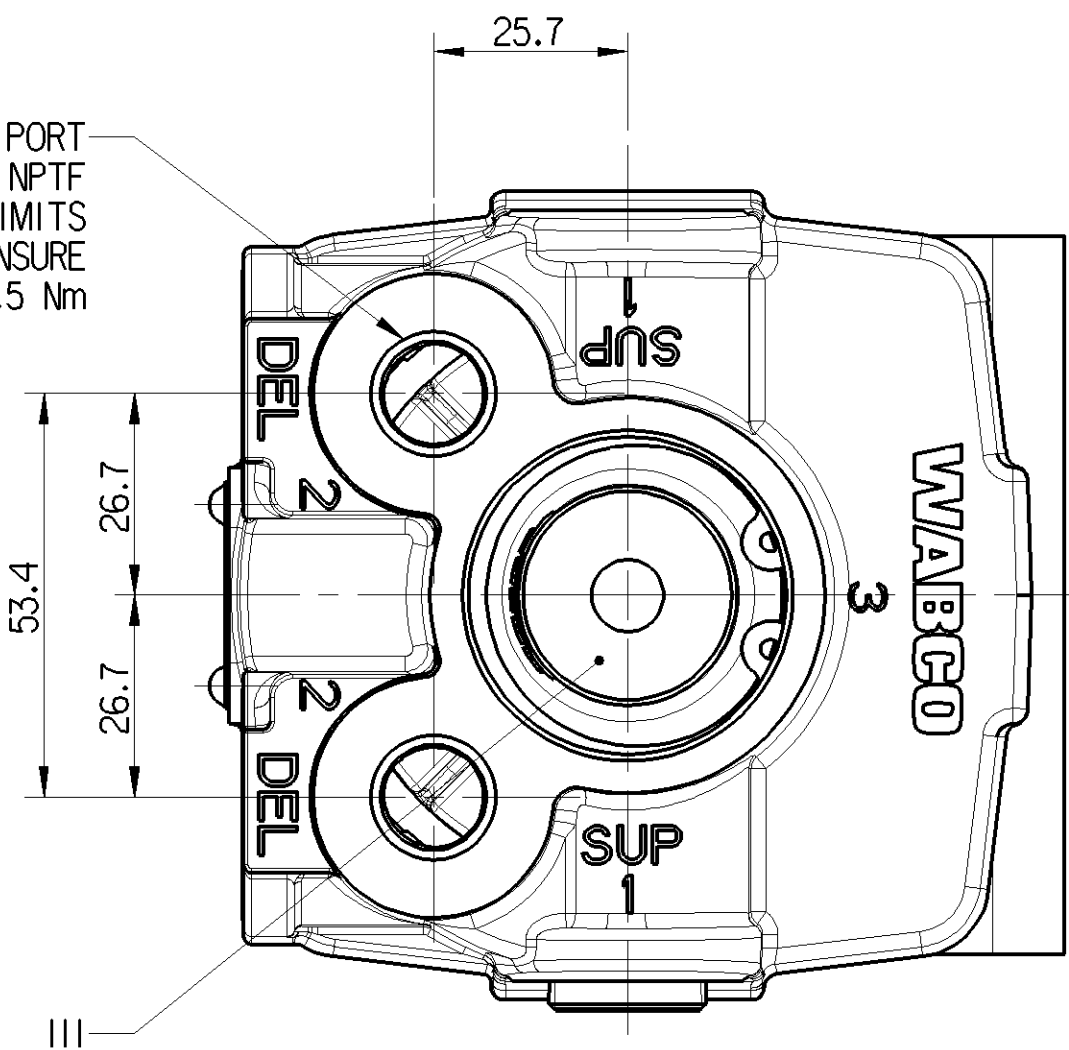

TECHNICAL DATA:

WORKING MEDIUM : AIR

THERMAL RANGE OF APPLICATION: -40°C TO +80°C (-40°F TO +176°F)

NORMAL WORKING PRESSURE: 9.4 bar (135 psi)

MAXIMUM WORKING PRESSURE: 11 bar (160 psi)






CRACK PRESSURE: 0.275±0.103 bar (4.0±1.5 psi)

INSTALLATION LOCATION : NOT TO BE MOUNTED NEAR HEAT SOURCE


INSTALLATION POSITION: REFER FIGURE U

ROOM TEMPERATURE LEAKAGE NOT TO EXCEED 30 SCCM

PART TO BE IDENTIFIED WITH CRACK PRESSURE, PART NUMBER, DATE OF MANUFACTURING AND COUNTRY OF ORIGIN LABEL

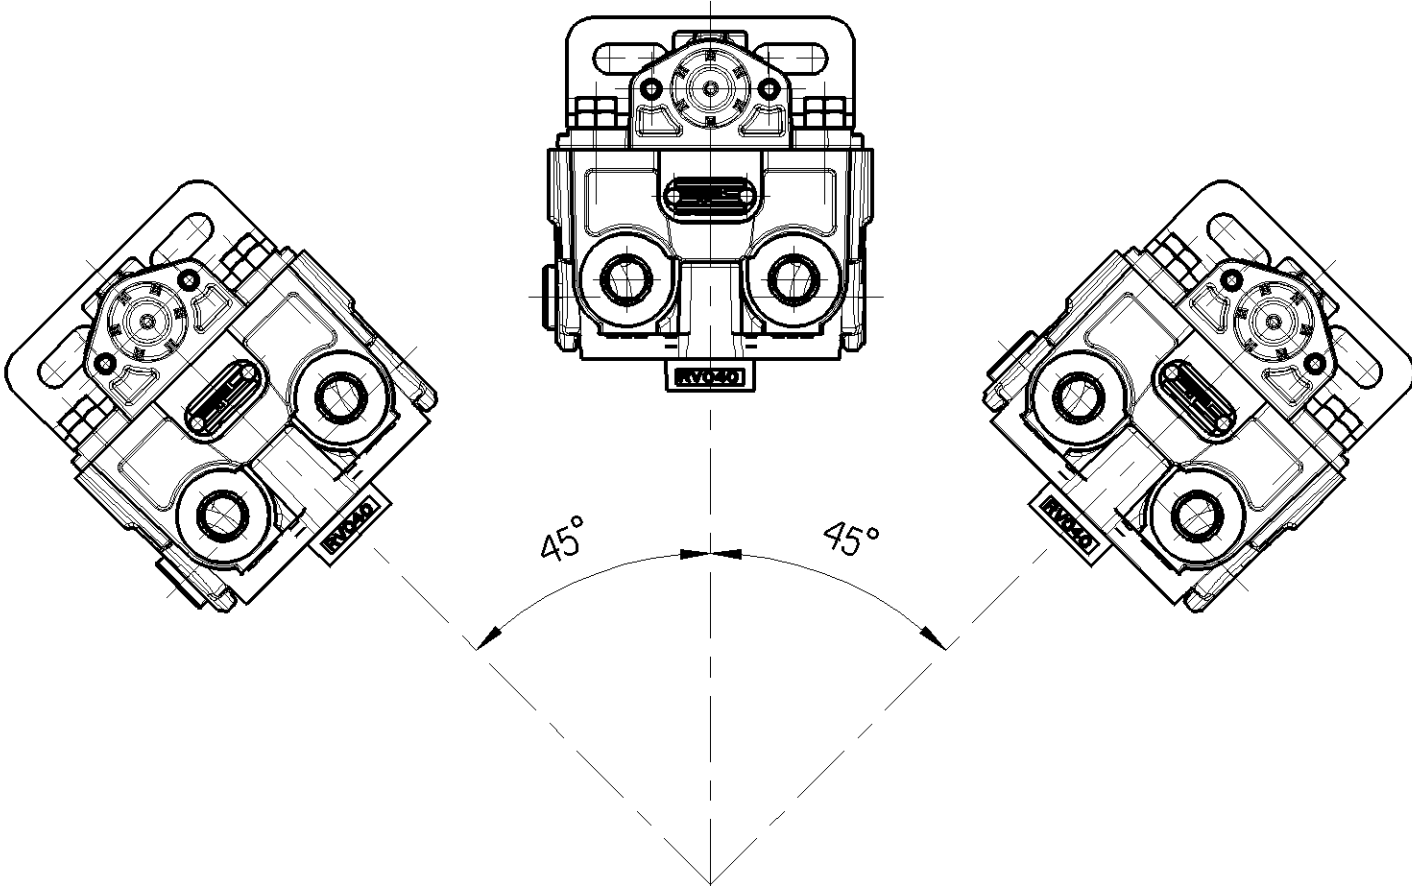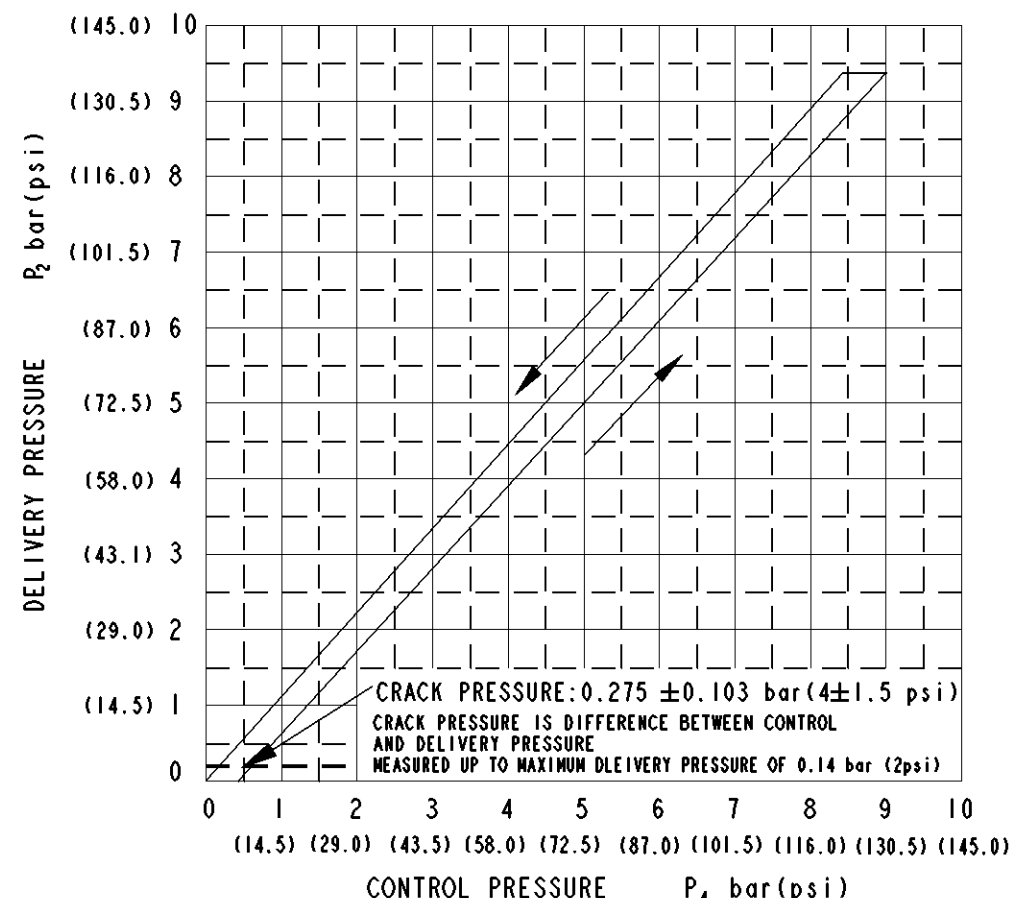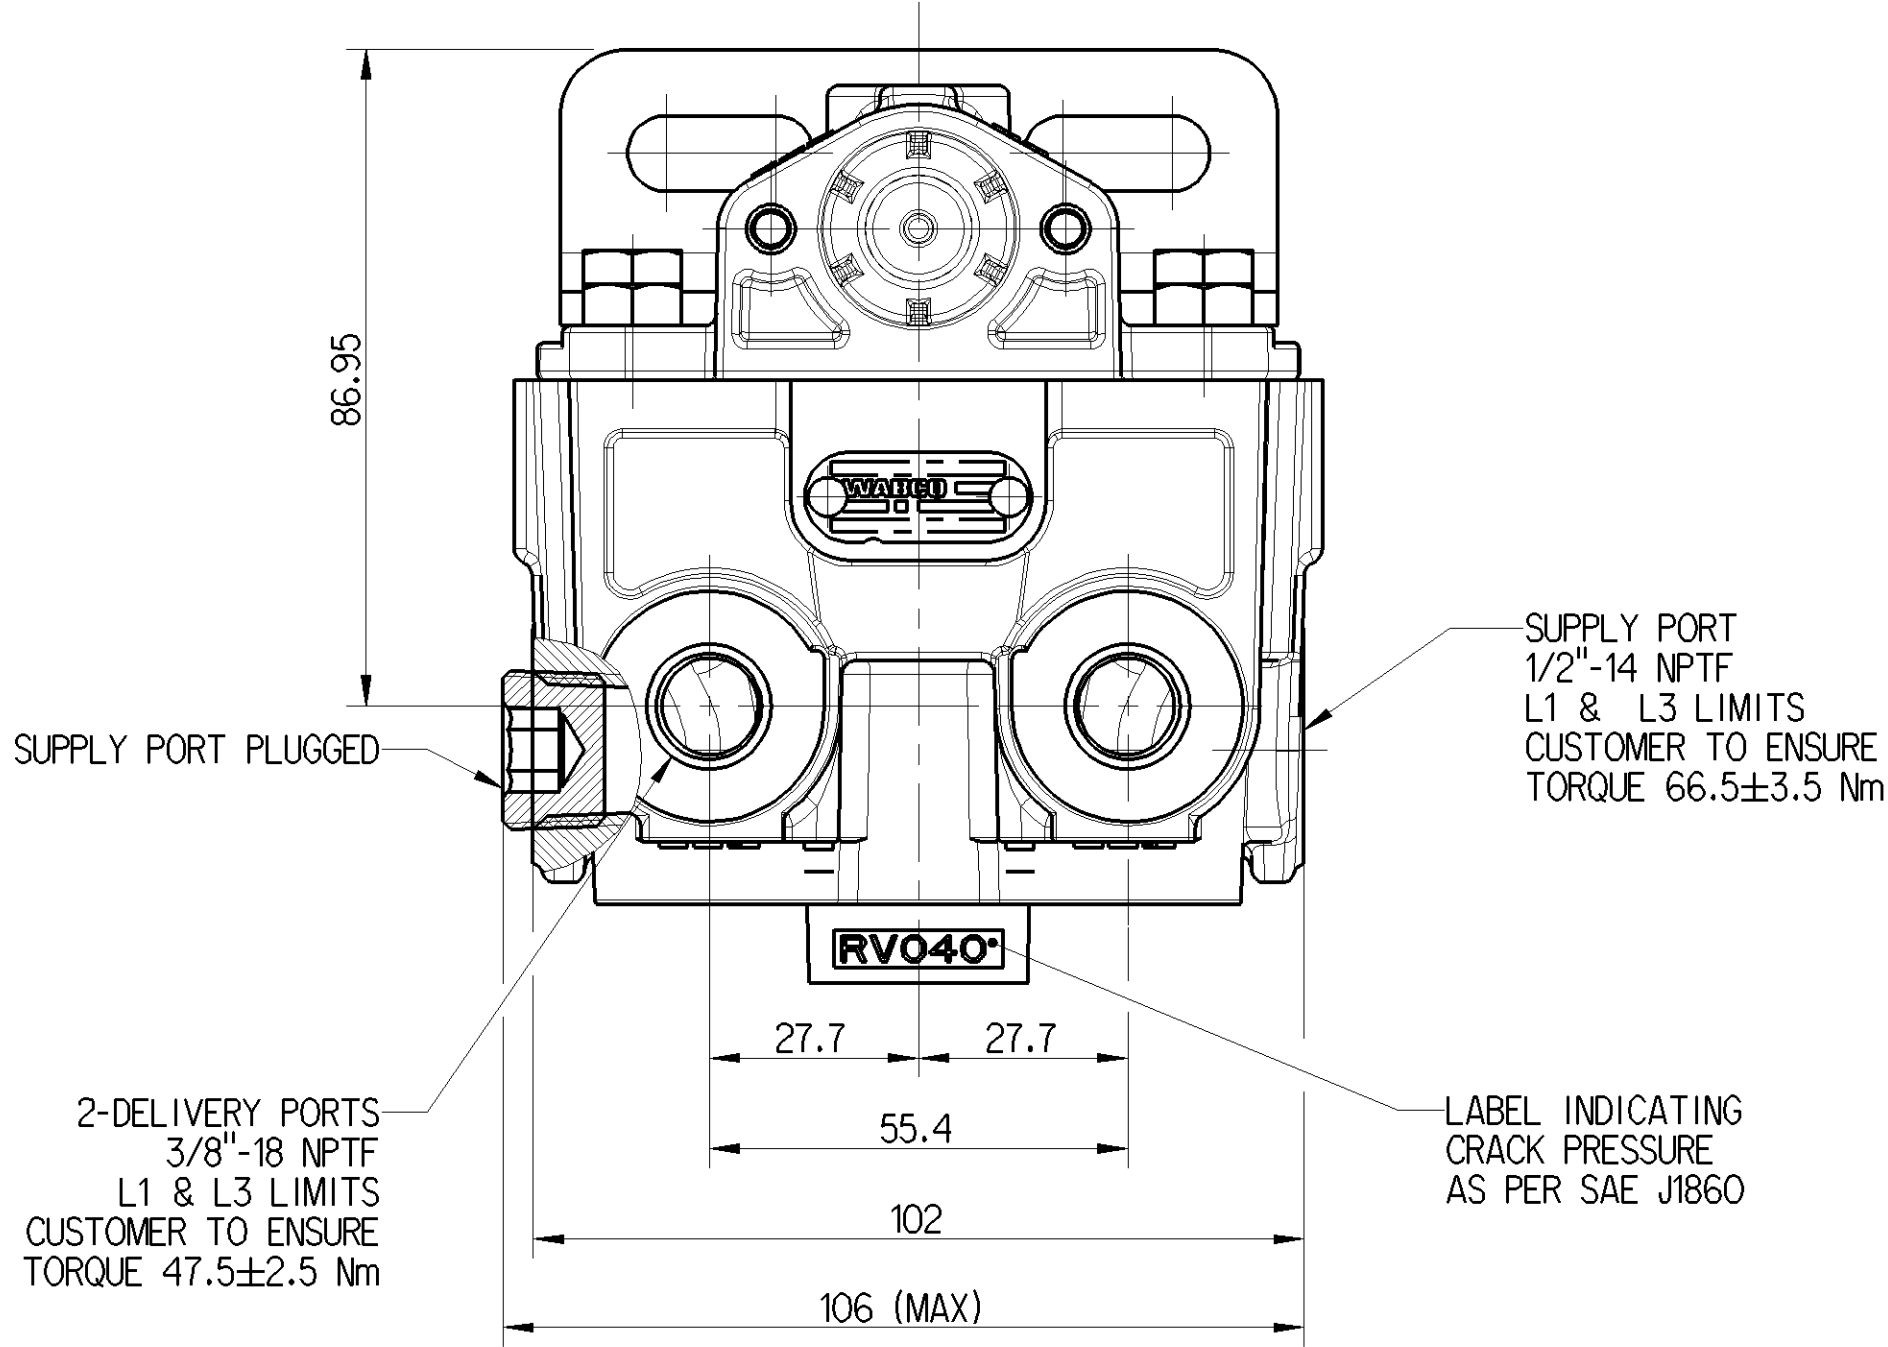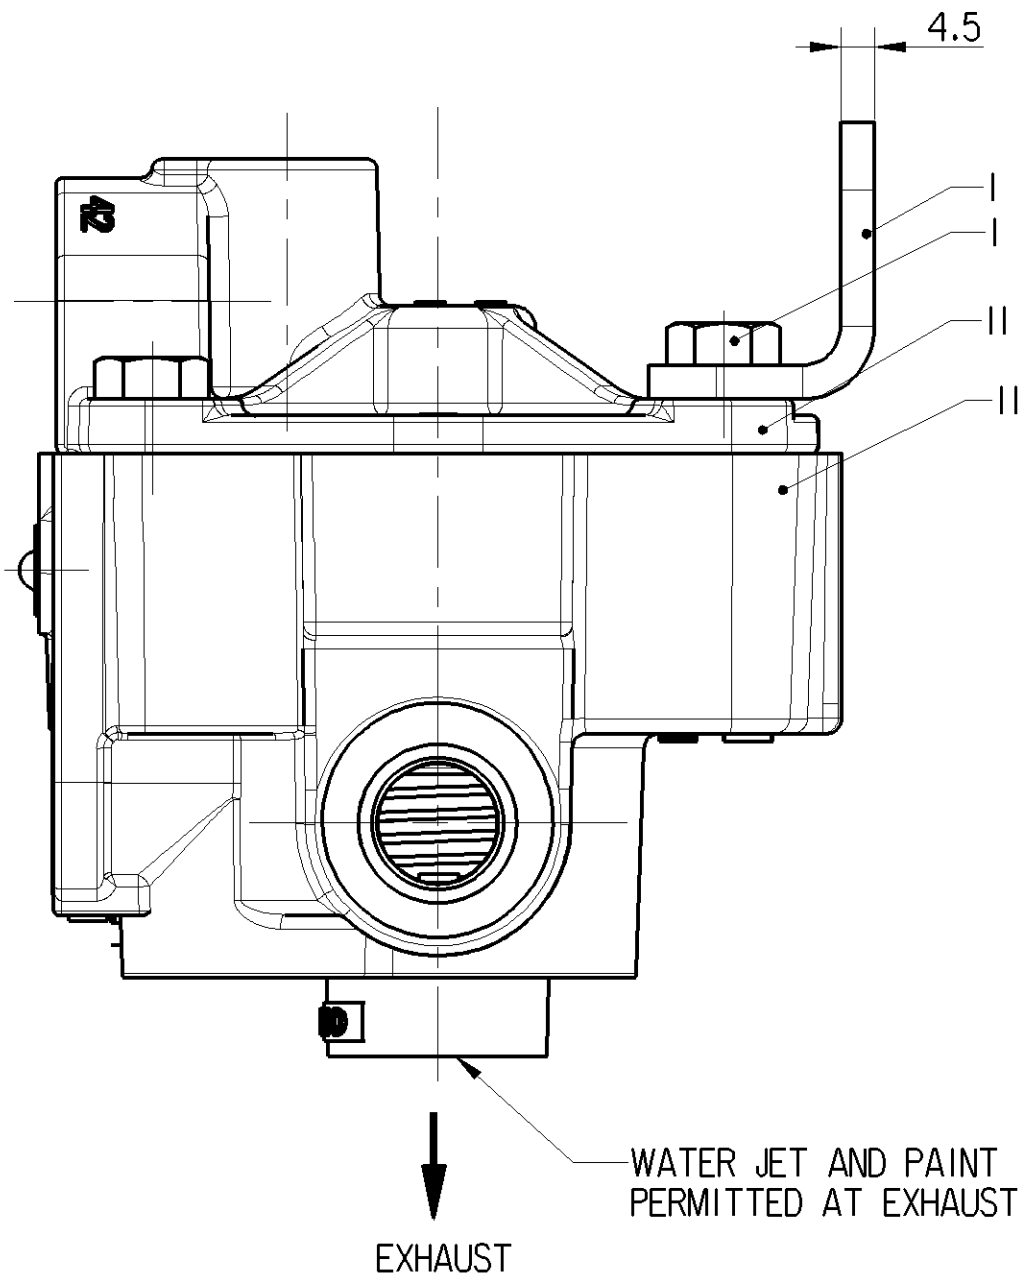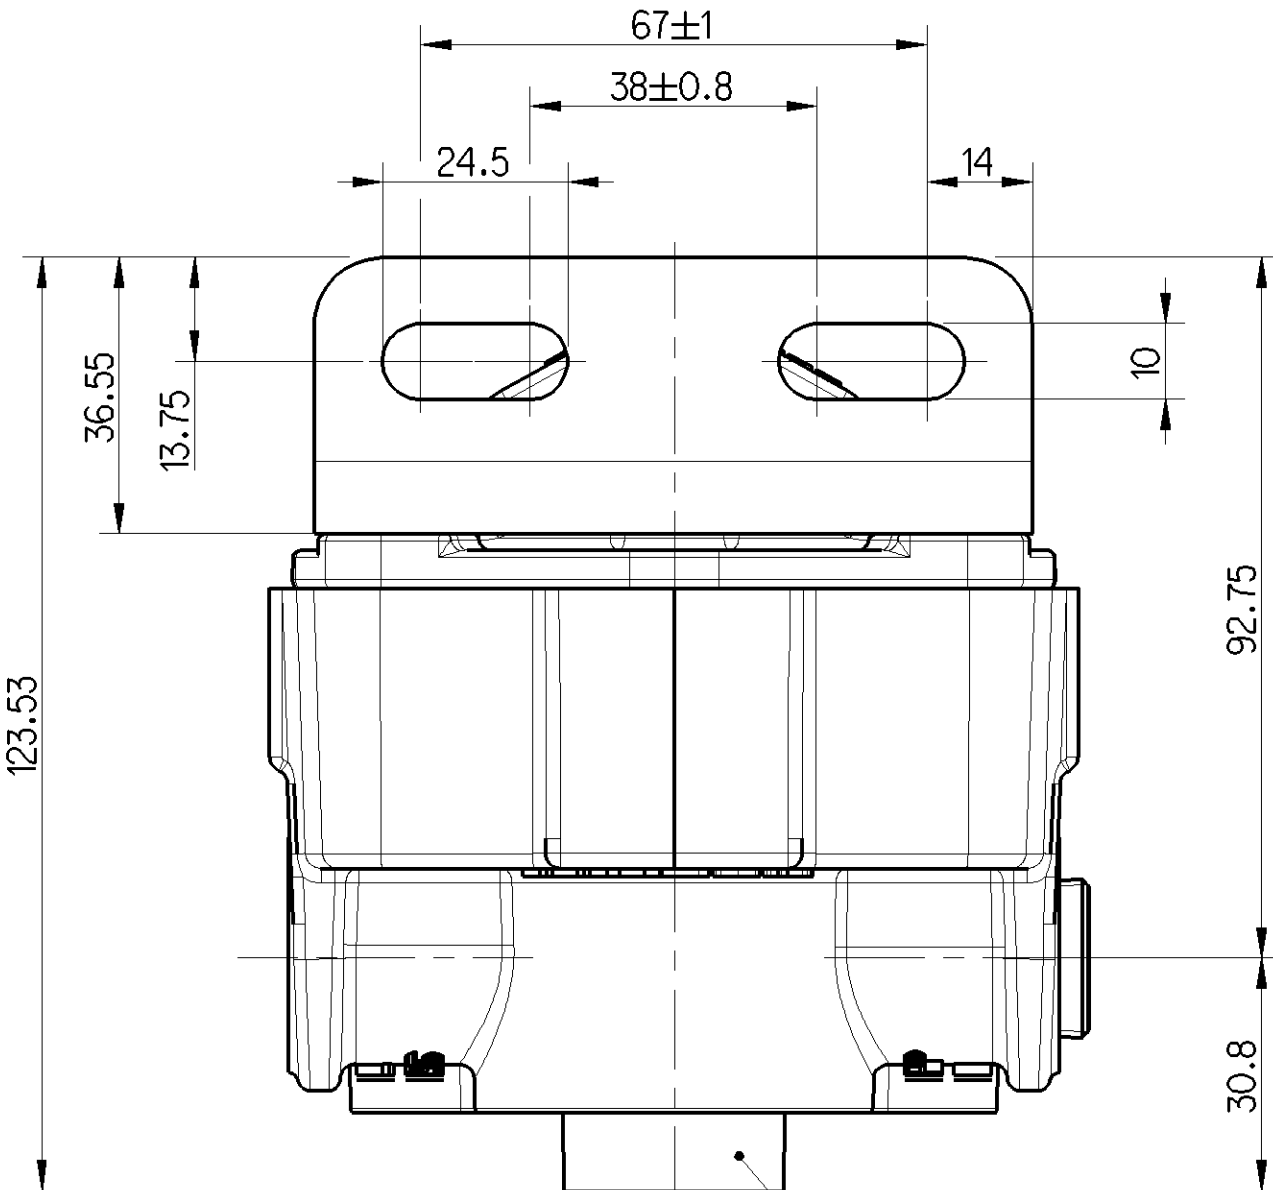


PERMISSIBLE INSTALLATION POSITION
FIGURE U

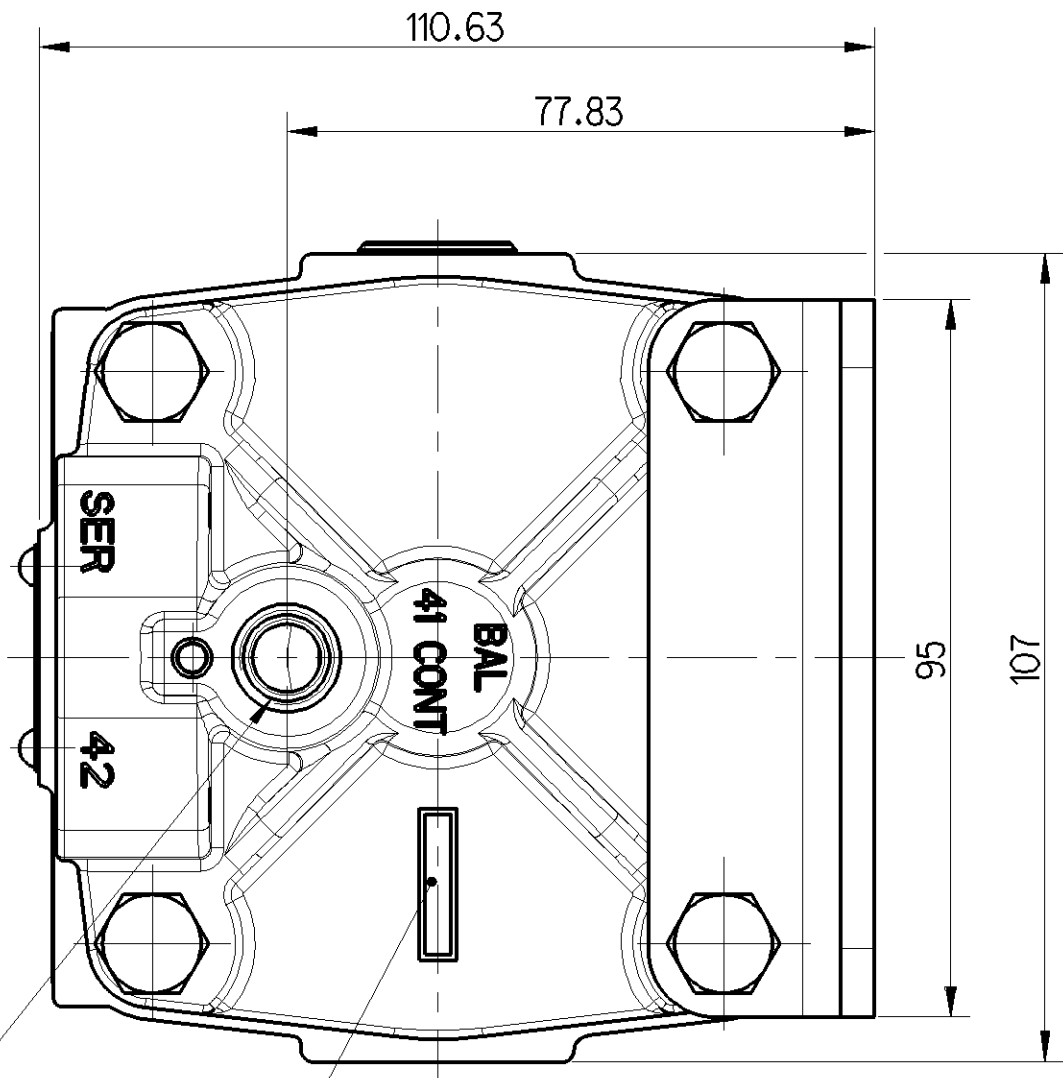

CONTROL PORT
1/4"-18 NPTF
L1 & L3 LIMITS
CUSTOMER TO ENSURE
TORQUE 28.5±1.5 Nm

LABEL INDICATING COUNTRY
OF ORIGIN "MADE IN INDIA"

CIRCUIT DIAGRAM

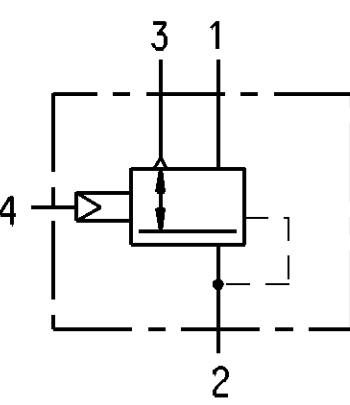

1. SUPPLY PORT
2. DELIVERY PORT
3. EXHAUST
4. CONTROL PORT

General Specification: JED-334-0				Copyright WABCO®			
Further Technical Data: 973 298 004 0				Date: 2016-07-13			
Doc. Code: 035				Sheet: 01 To 08			
General Tolerances JED-261				Checked: Pradeep			
Range of Nominal Dimensions (± mm)				2016-07-13			
Class				Expert: Kothandapani			
Fine				Arumugham Ganesamoorthy			
Medium				Material No.			
Coarse				973 298 145 0			
Tapped Holes acc. JED-686				Date of first issue: 2016-07-13			
1) Tolerance Class Applied Crossmarked				Doc. Code: 005			
				Language: EN			
				Sheet: 1/1			