
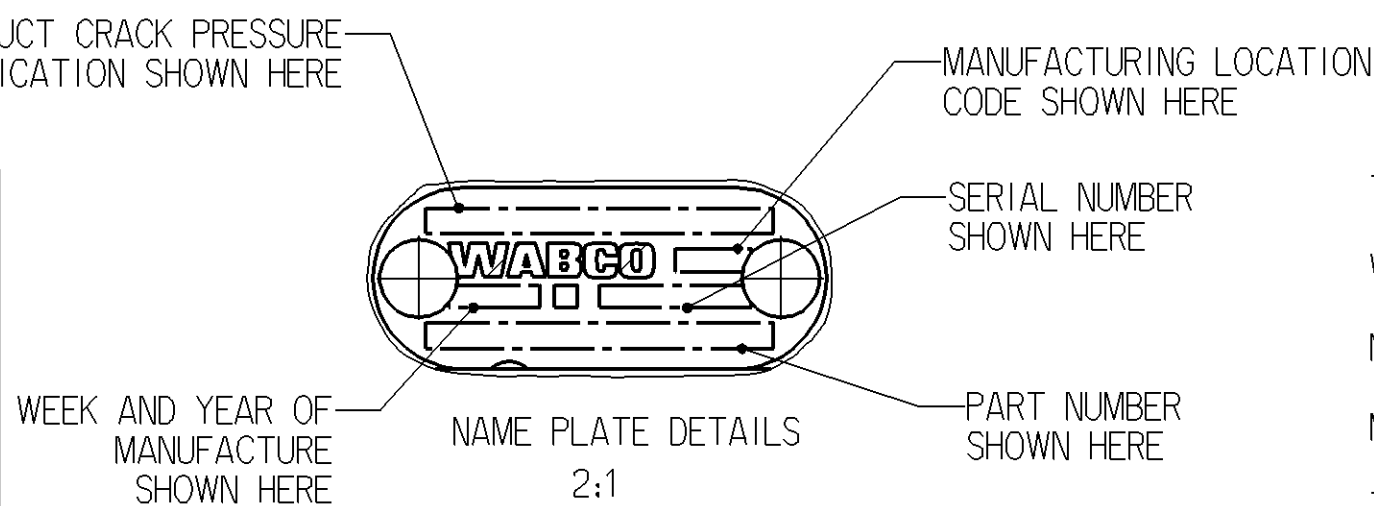
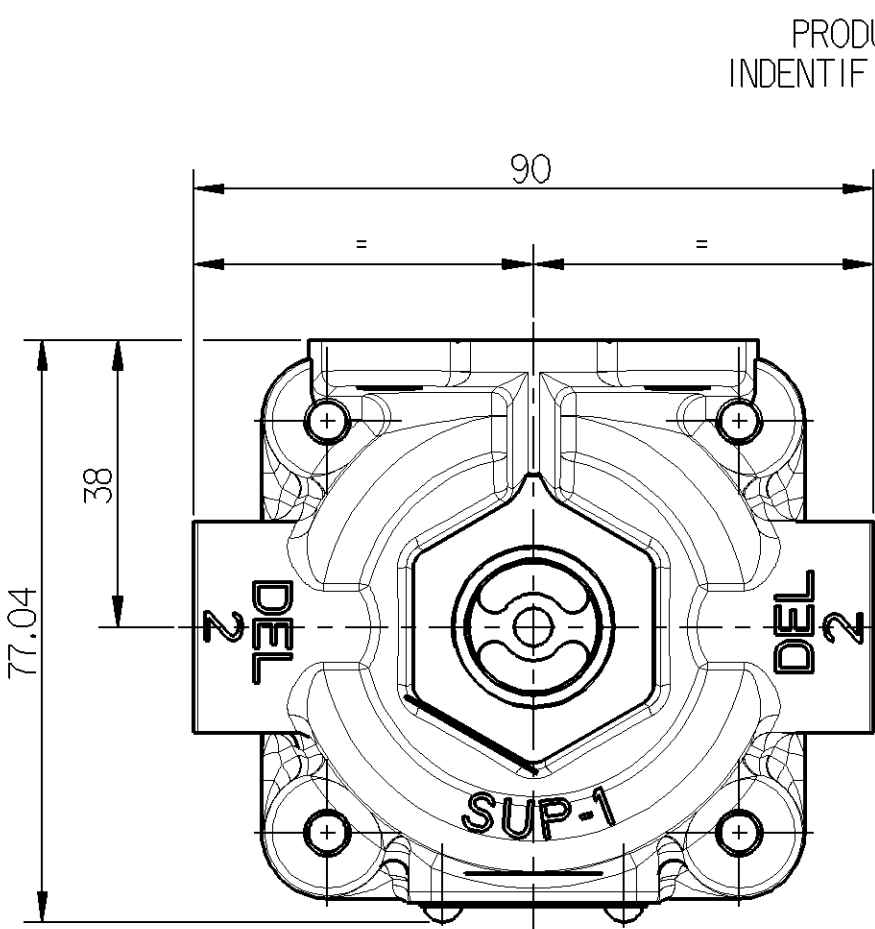
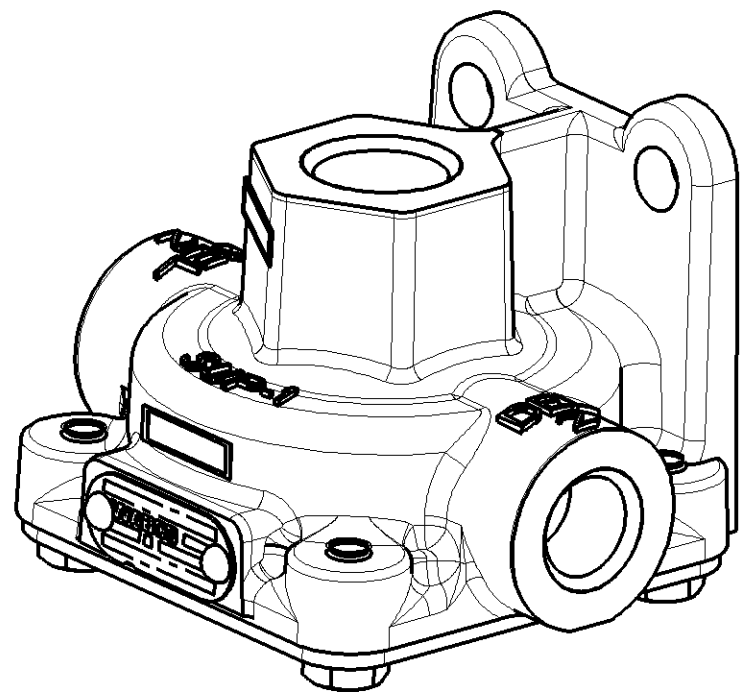
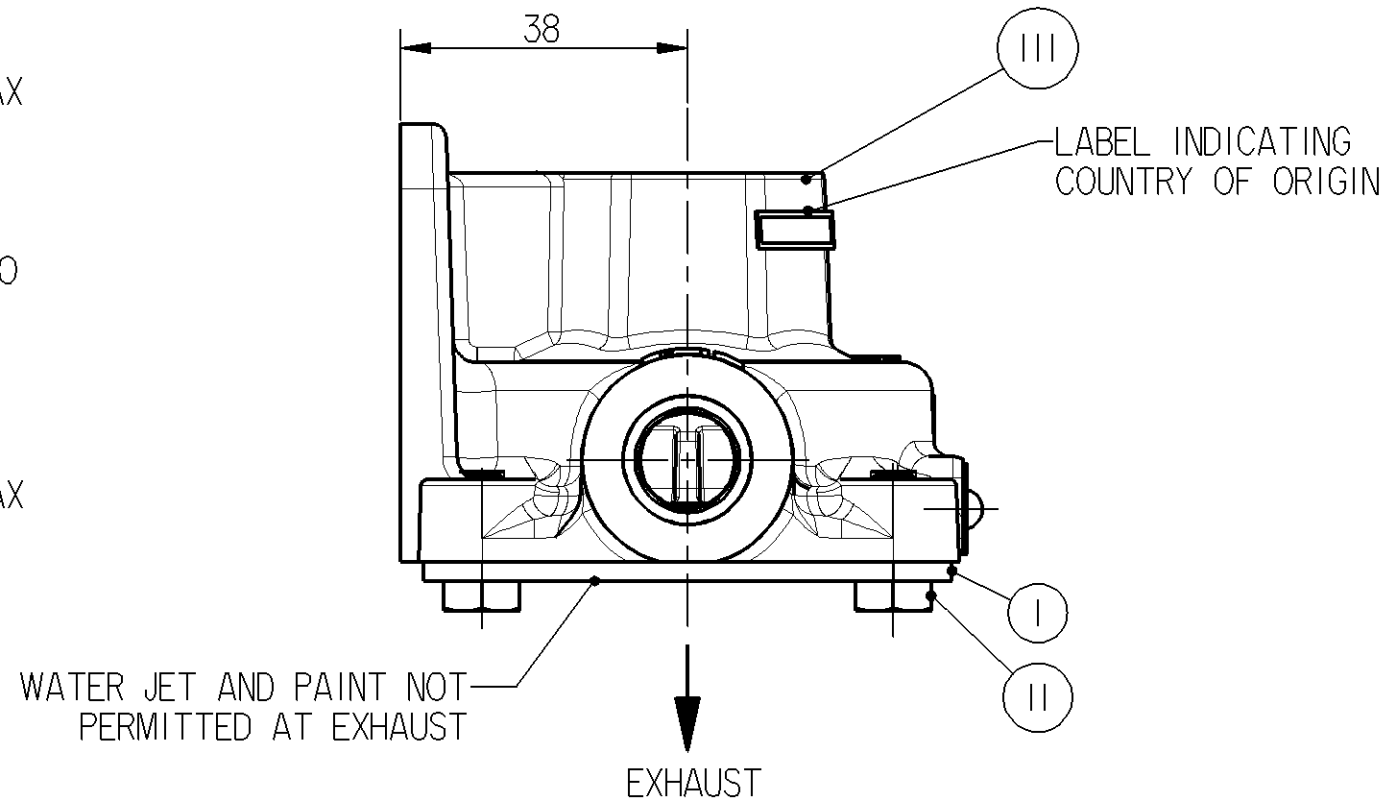


Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzare il contenuto o renderlo comunque noto a terzi.
E' vietata espressamente la ristampa o l'uso non autorizzato senza permesso scritto dalla WABCO. E' vietata espressamente la ristampa o l'uso non autorizzato senza permesso scritto dalla WABCO.
Toute communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Toute réimpression ou utilisation non autorisée sans la permission écrite de la WABCO est formellement interdite. Toute réimpression ou utilisation non autorisée sans la permission écrite de la WABCO est formellement interdite.
Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung ihres Inhalts ist nicht gestattet, soweit nicht ausdrücklich zugelassen. Zuwiderhandlungen stellen einen betragsrechtlichen Missbrauch dar und verpflichten zu Schadensersatz. Alle Rechte hier den Fall der Patentierung oder Gebrauchsmuster-Eintragung vorbehalten.

SURFACE PROTECTION	
I	JED 240-5
II	JED-256-5
III	SC MATL 39-M1

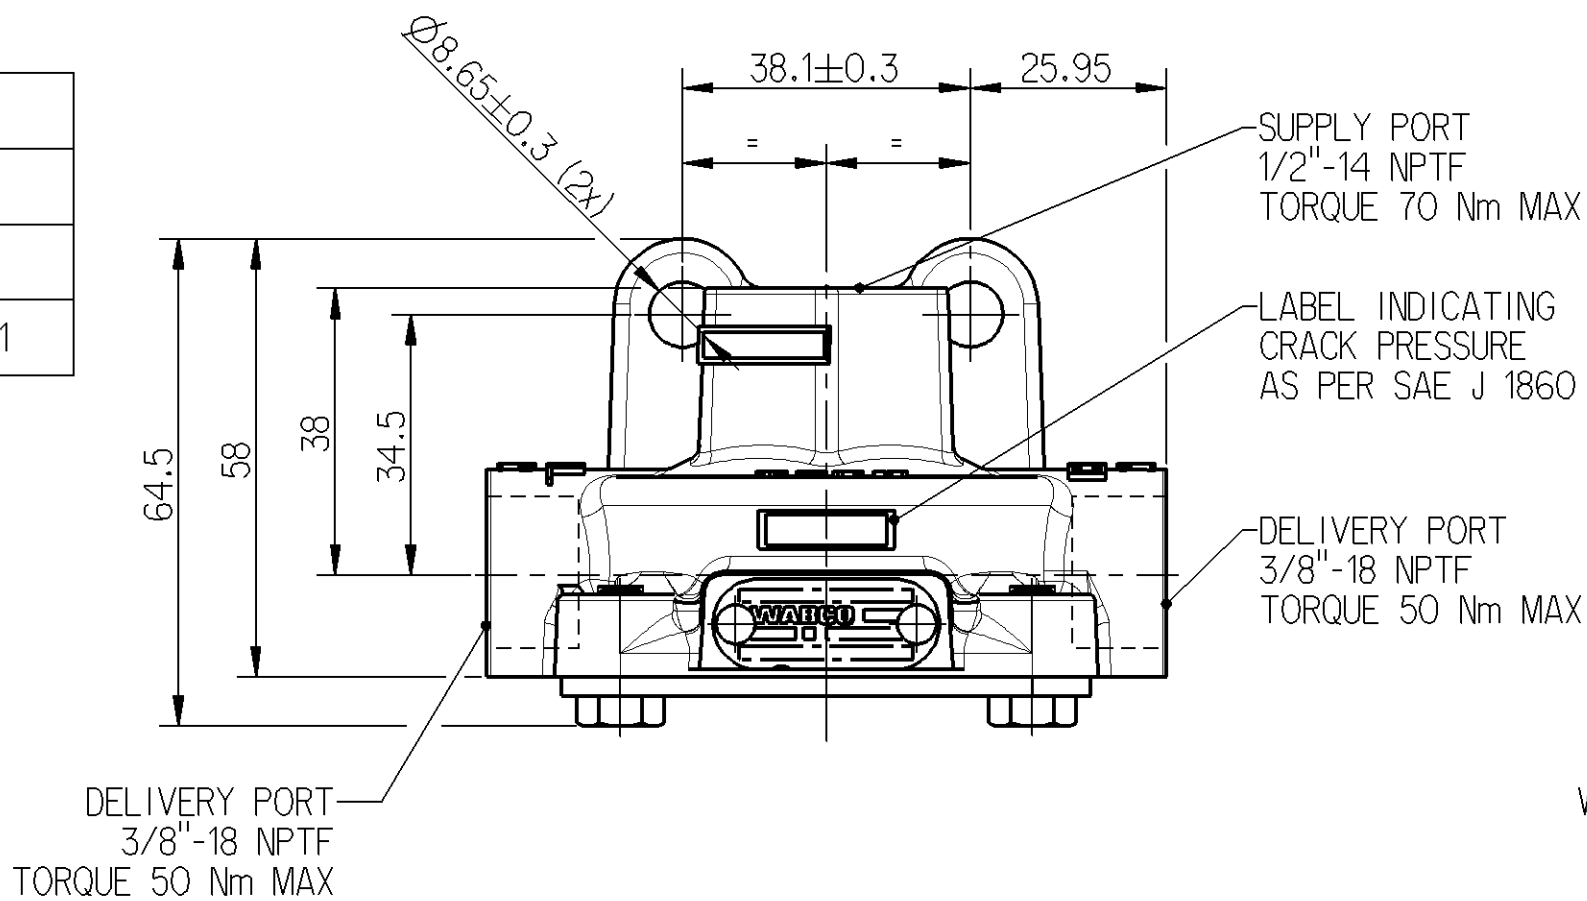

TECHNICAL DATA

WORKING MEDIUM : AIR

NORMAL WORKING PRESSURE : 9.4 bar (135 psi)

MAXIMUM WORKING PRESSURE : 11 bar (160 psi)




THERMAL RANGE OF OPERATION : -40°C TO +94°C (-40°F TO +200°F)

ROOM TEMPERATURE LEAKAGE NOT TO EXCEED 30 SCCM

CRACK PRESSURE : 0-0.07 bar (0-1 psi)

PART TO BE IDENTIFIED BY CRACK PRESSURE, PART NUMBER, DATE OF MANUFACTURE AND COUNTRY OF ORIGIN LABEL

INSTALLATION : REFER FIGURE U

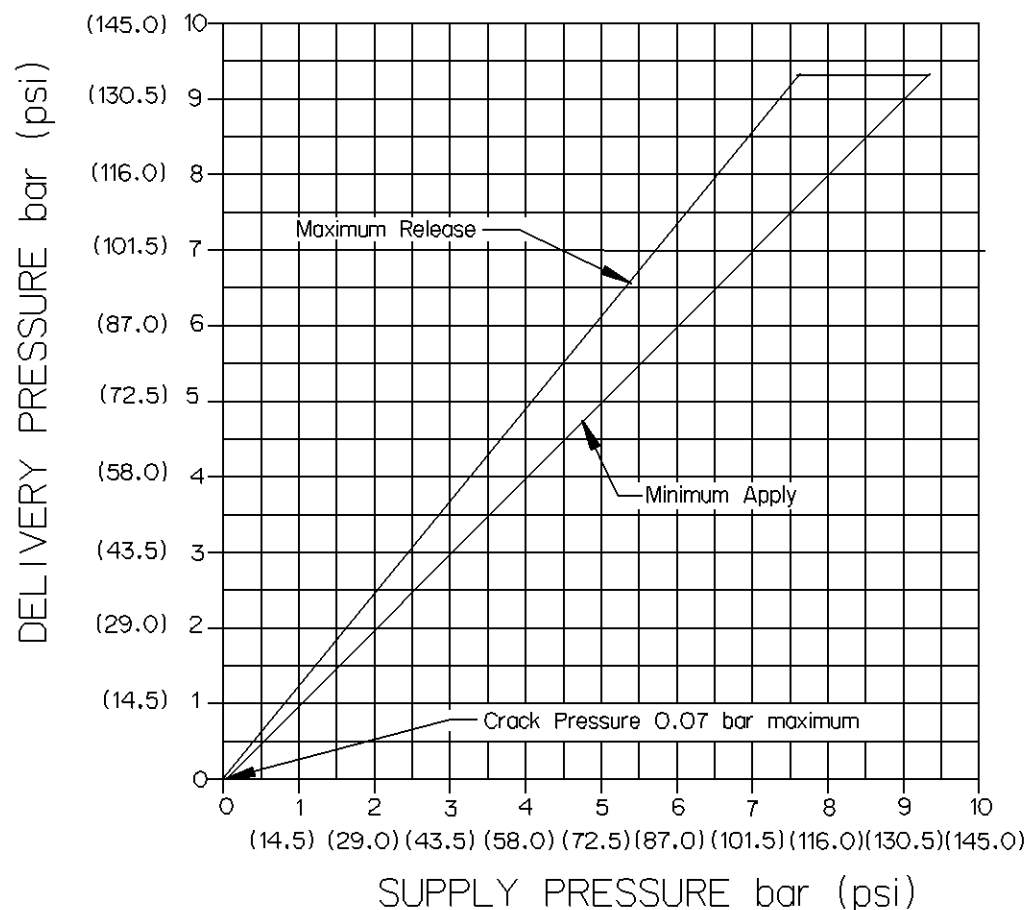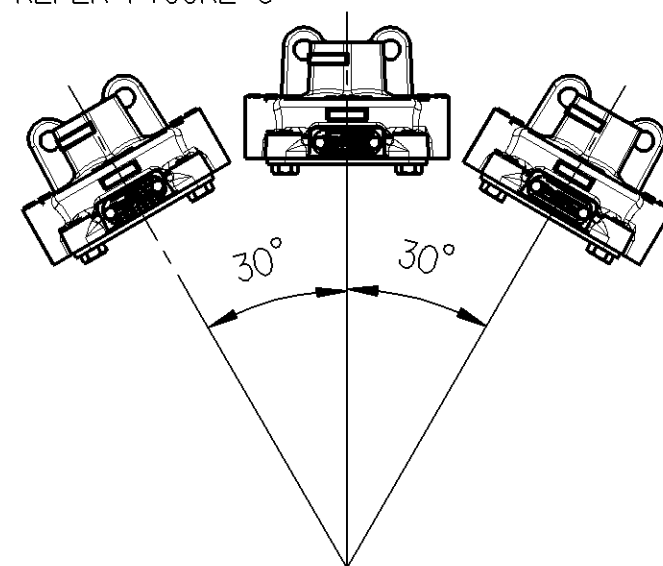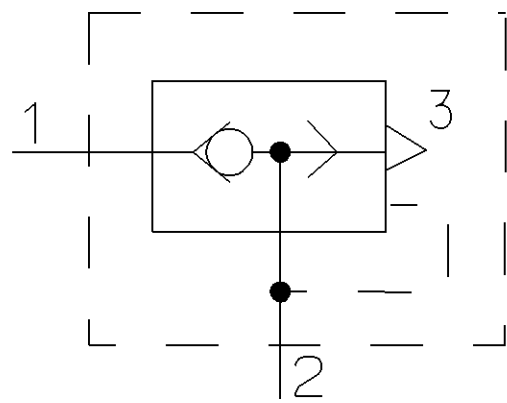

General Specification: JED-334-0						Copyright WABCO®			WABCO QR-QUICK RELEASE VALVE																														
Further Technical Data: 973 899 000 0						Date		Signature																															
Doc. Code: Q35			Sheet: 1 To 9			2011-07-15		Kothandapani																															
General Tolerances JED-261						Checked		2011-07-15					Arumugham																										
<table><tr><td rowspan="4">Class 1)</td><td colspan="5">Range of Nominal Dimensions (± mm)</td><td rowspan="4"></td></tr><tr><td>≤ 50</td><td>> 50 ≤ 180</td><td>> 180 ≤ 400</td><td>> 400</td></tr><tr><td>Fine</td><td>0.5</td><td>1.0</td><td>1.5</td><td>2.0</td></tr><tr><td>Medium</td><td>1.0</td><td>2.0</td><td>3.0</td><td>4.0</td></tr><tr><td>Coarse</td><td>2.0</td><td>3.5</td><td>5.0</td><td>6.5</td></tr></table>						Class 1)	Range of Nominal Dimensions (± mm)						≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	Fine	0.5	1.0	1.5	2.0	Medium	1.0	2.0	3.0	4.0	Coarse	2.0	3.5	5.0	6.5	Expert		A GANESAMOORTHY					
							Class 1)	Range of Nominal Dimensions (± mm)																															
								≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400																												
								Fine	0.5	1.0	1.5			2.0																									
Medium	1.0	2.0	3.0	4.0																																			
Coarse	2.0	3.5	5.0	6.5																																			
<table><tr><td colspan="2">Tapped Holes acc. JED-686</td></tr><tr><td colspan="2">1) Tolerance Class Applied Crossmarked</td></tr></table>						Tapped Holes acc. JED-686		1) Tolerance Class Applied Crossmarked		Mass		Scale		Material No.				Date of first issue: 2010-04-10																					
						Tapped Holes acc. JED-686																																	
						1) Tolerance Class Applied Crossmarked																																	
						0.404 KG		1:1 2:1		973 899 050 0				Doc.Code		Language		Sheet																					
Size		CAD System		005		EN		1/1																															
						A 2		Pro/E				EQN-No.		Revision		Techn. Resp.		Replacement for																					
												-		- -		5310_WIN		/																					