




EXTERIOR OUTLINE ALTERNATIVELY
AUSSENKONTUR WAHLWEISE
CONTOUR EXTERIEUR ALTERNATIVEMENT
CONTOMO ESTERNO A SCELTA

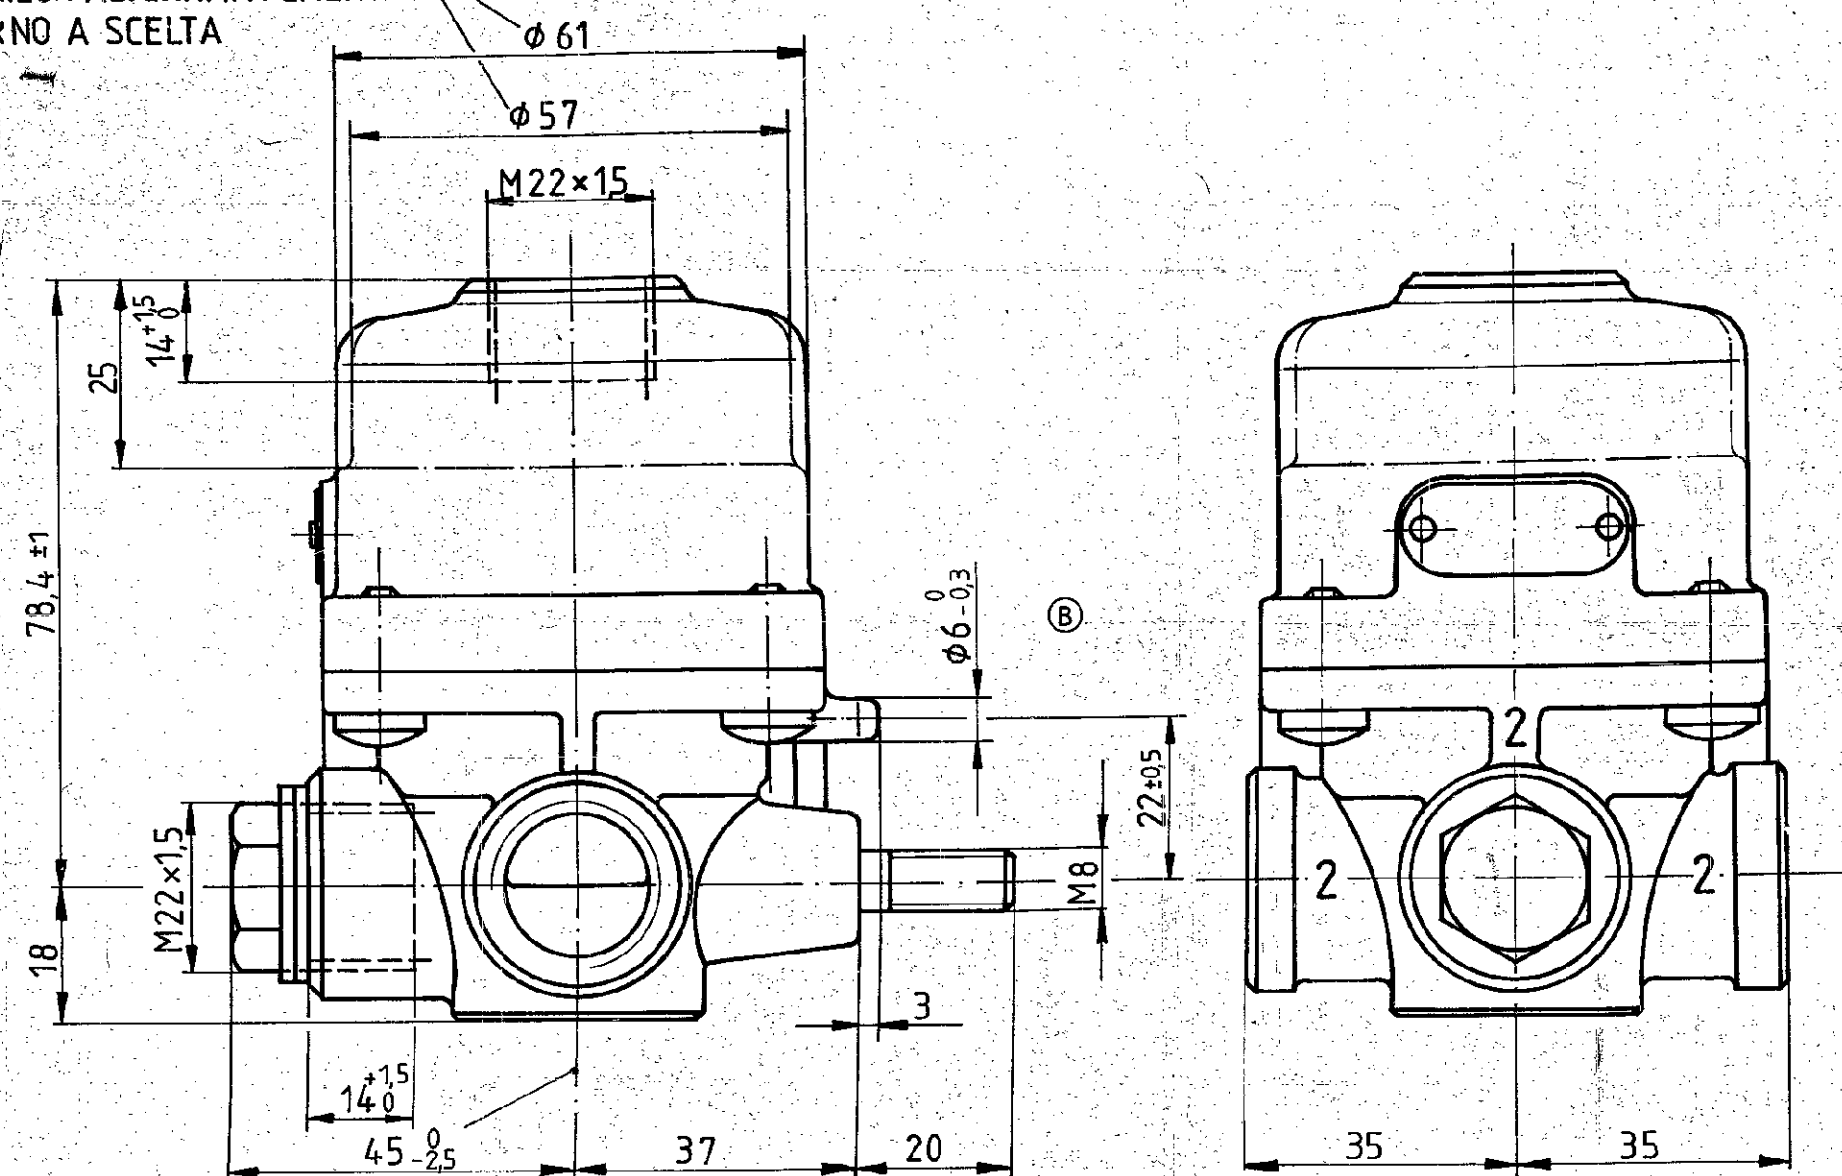


EXHAUST
ENTLUEFTUNG
ECHAPPEMENT
SCARICO

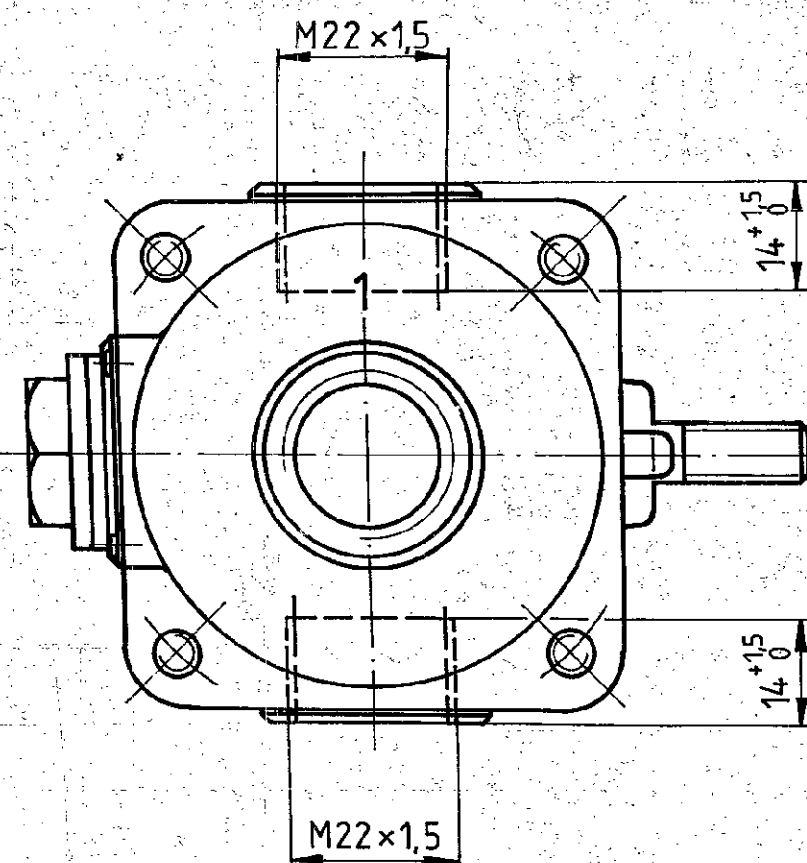

OUTLET PRESSURE
AUSGESTEUERTER DRUCK
PRESSION DE SORTIE
PRESSIONE DI USCITA

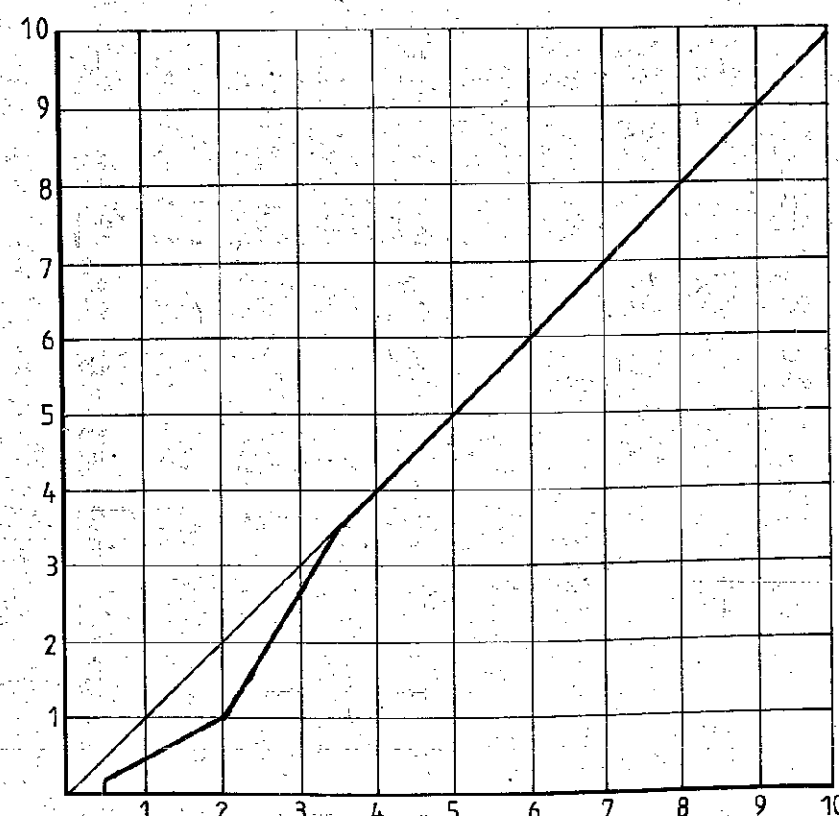

INLET PRESSURE
EINGESTEUERTER DRUCK
PRESSION D'ALIMENTATION
PRESSIONE DI ALIMENTAZIONE

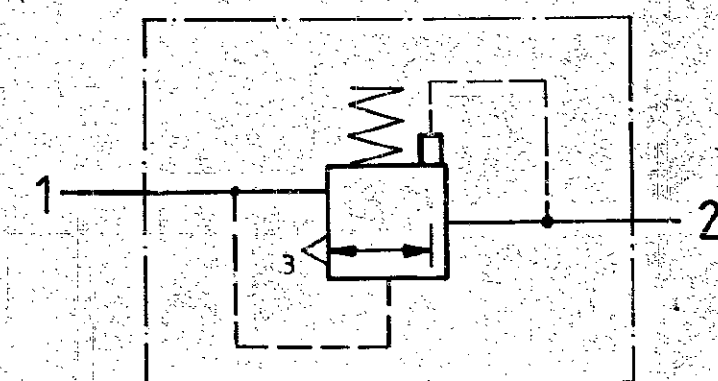

THERMAL RANGE OF APPLICATION
THERMISCHER ANWENDUNGSBEREICH
GAMME D'APPLICATION THERMIQUE
CAMPO DI APPLICAZIONE TERMICA

-40°C...+80°C

WORKING PRESSURE
BETRIEBSDRUCK
PRESSION D'UTILISATION
PRESSIONE DI ESERCIZIO

p_e max. : 10bar

MEDIUM: AIR
MEDIUM: LUFT
FLUIDE: AIR
FLUIDO: ARIA

INSTALLATION POSITION AS DRAWN
EINBAULAGE WIE GEZEICHNET
POSITION D'INSTALLATION SUIVANT DESSIN
POSIZIONE DI MONTAGGIO COME DISEGNATO

1 INLET
EINGANG
ALIMENTATION
ALIMENTAZIONE

2 OUTLET
AUSGANG
SORTIE
USCITA

GENERAL TOLERANCES									
CLASS	RANGE OF NOMINAL DIMENSIONS (± mm)				SYMBOL	FORCE POWER PRESSURE ETC			
	0	≤ 50	≤ 100	≤ 400	(± %)	0	1	2	3
I	0.5	1	1.5	2	3	5	10	20	30
II	1	2	3	4	4	10	20	30	40
III	2	3.5	5	6.5	5	20	30	40	50

TAPPED HOLES ACC. ISO 4039
TOLERANCE CLASS APPLIED CROSSMARKED

COPYRIGHT BY WABCO				WABCO			
DATE	SIGNATURE	DATE	SIGNATURE	ADJUSTING VALVE			
80-03-27	80-03-27	80-03-27	80-03-27	VALVE D ADAPTION			
80-03-27	80-03-27	80-03-27	80-03-27	VALVOLA ADATTATRICE			
80-12-22	80-12-22	80-12-22	80-12-22	ANPASSUNGSVENTIL			
27903	1x (B)	82-09-29	82-09-29	IDENTIFICATION			
23840	(A)	80-03-27	80-03-27	975 002 005 0			
REPLACEMENT FOR	SIZE	T.R.L.	SCALE	CODE FOR FUNCTION			
975 002 005 0	A 2	140	1:1	CODE FOR SHAPE			
OF 75-10-25				CODE FOR DOCUMENT			
				605			