
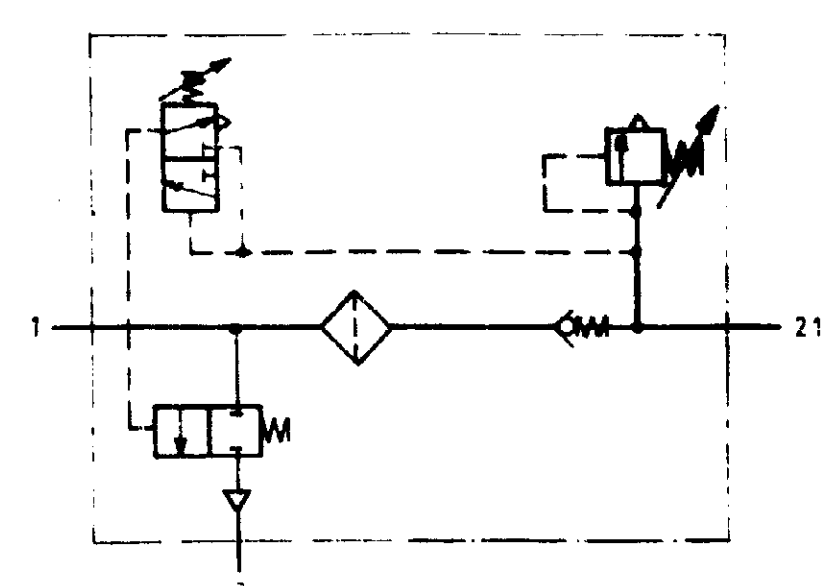
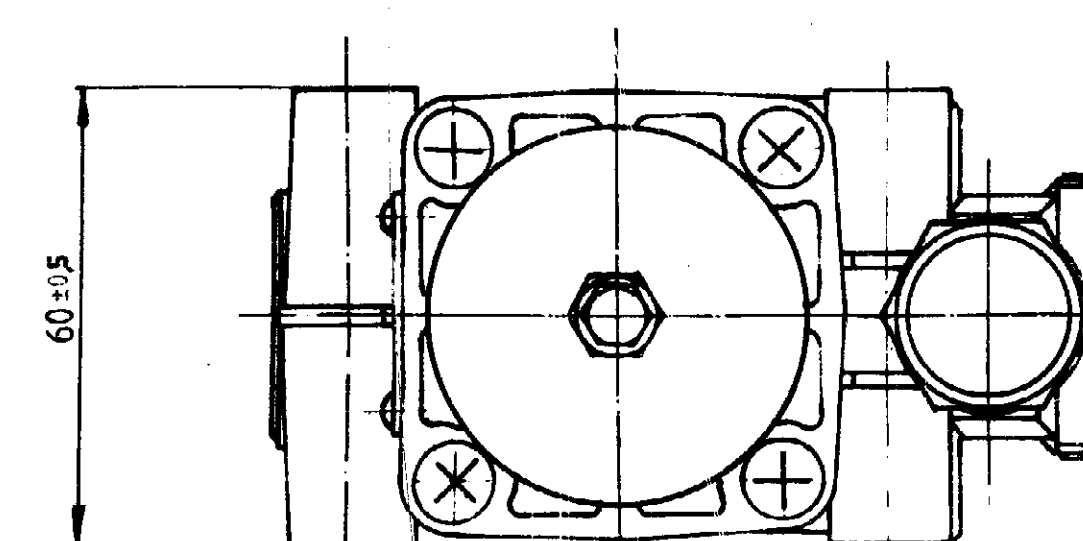
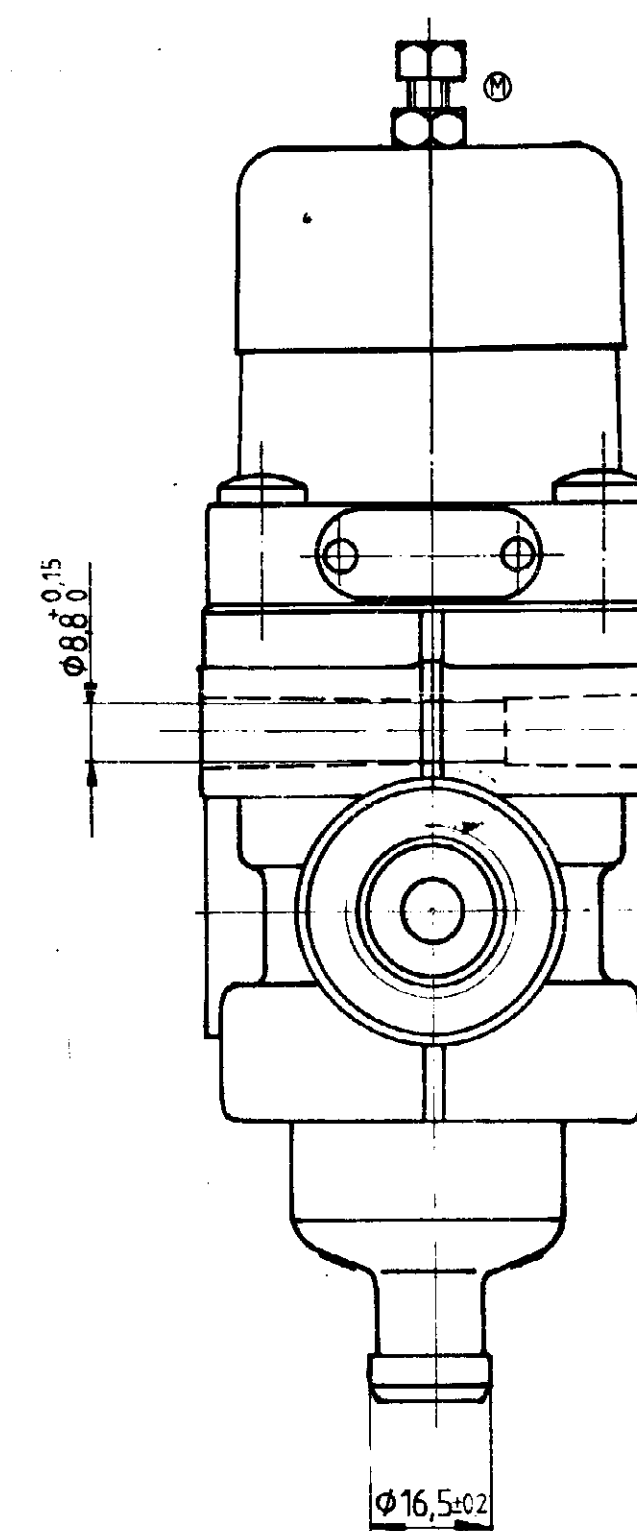


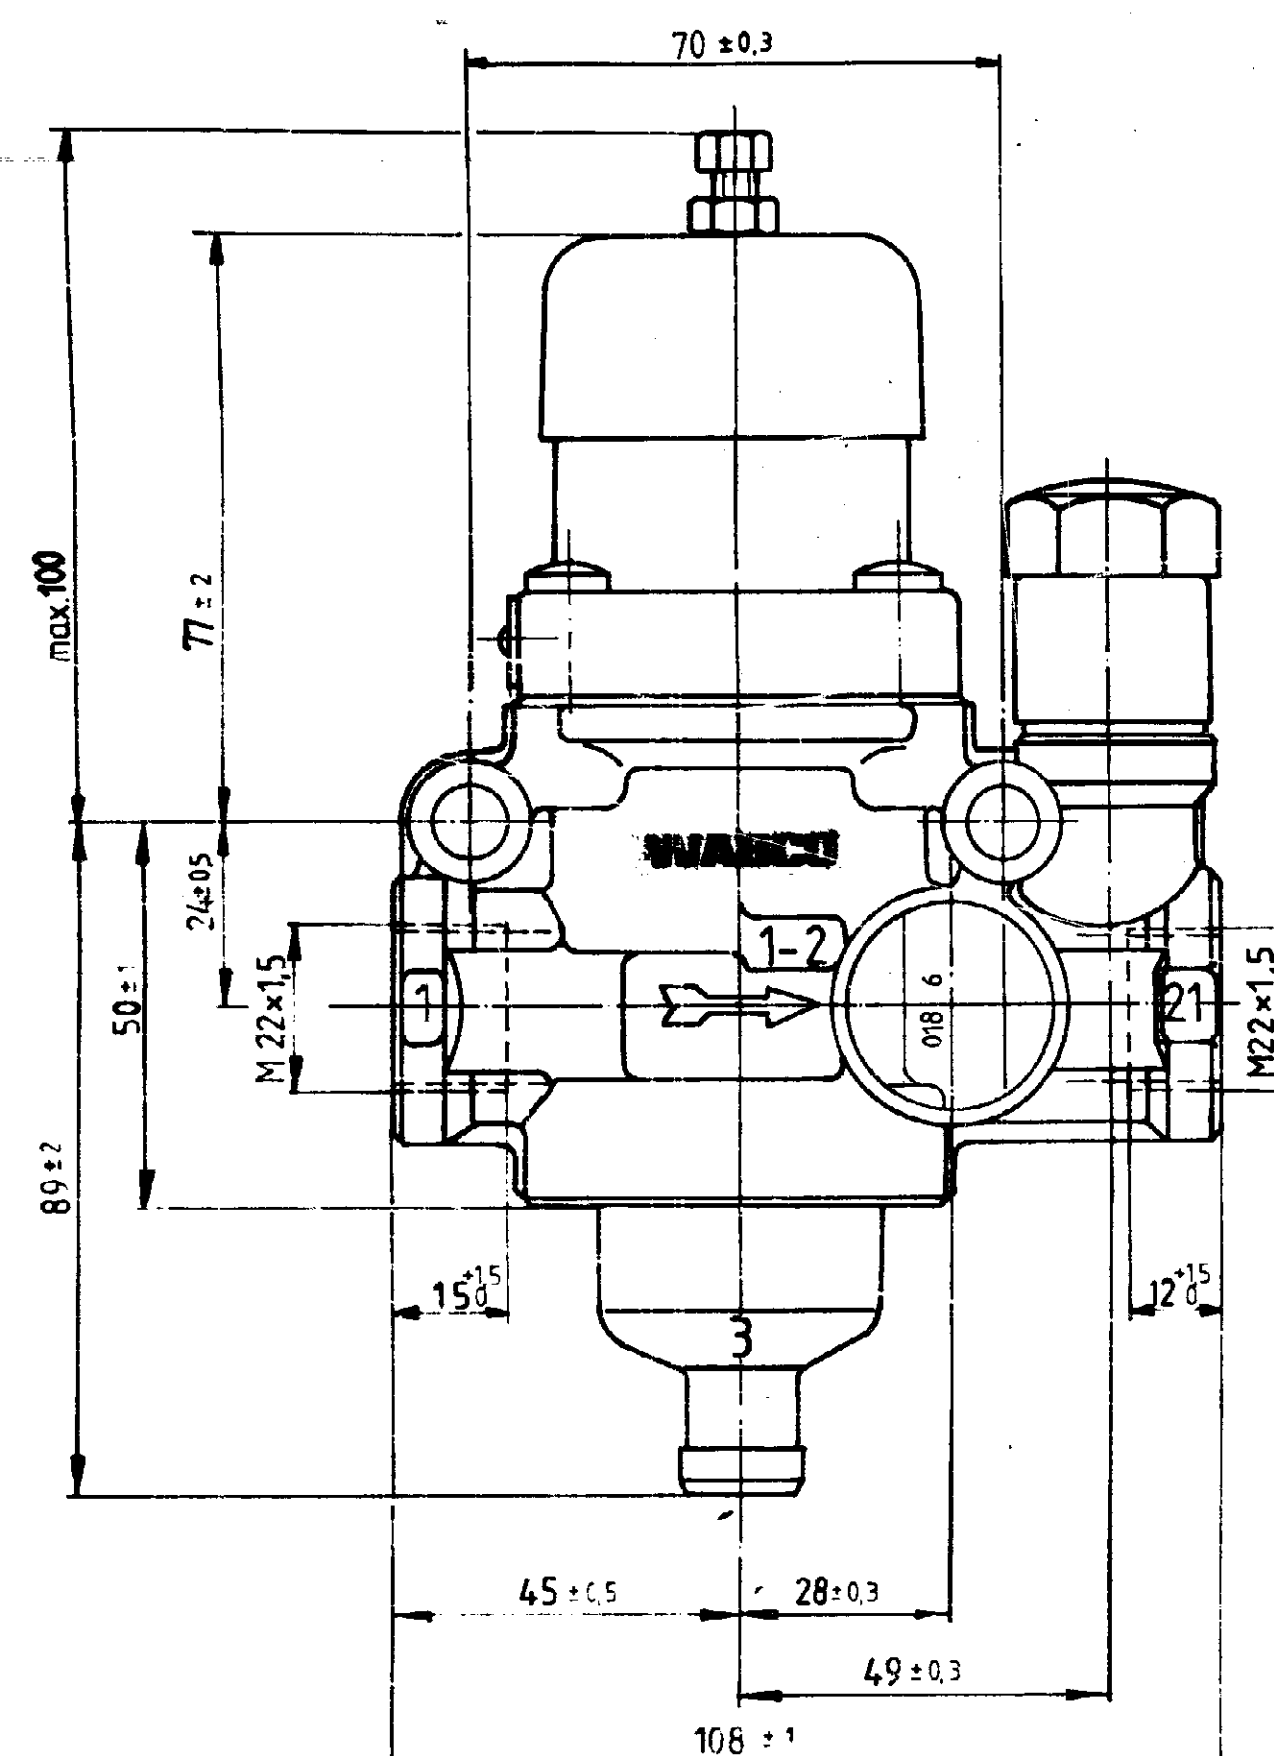

MEDIUM: AIR
MEDIUM: LUFT
FLUIDE: AIR
FLUIDO: ARIA

WORKING PRESSURE:
BETRIEBSDRUCK: pe max. 15 bar
PRESSION DE SERVICE:
PRESSIONE DI ESERCIZIO:

THERMAL RANGE OF APPLICATION:
THERMISCHER ANWENDUNGSBEREICH: -40°C ... +150°C
APPLICATION THERMIQUE:
CAMPO DI APPLICAZIONE TERMICA:

CUT-OUT PRESSURE:
ABSCHALTDRUCK: 9,3 ± 0.2 bar
PRESSION D'OUVERTURE:
PRESSIONE D'APERTURA:

PRESSURE SETTING RANGE:
SCHALTSPANNE: 0,7^{+0.5}₋₀ bar
PLAGE DE REGULATION:
GAMMA DI REGOLAZIONE:

OPENING PRESSURE OF THE SAFETY VALVE:
OEFFNUNGSDRUCK DES SICHERHEITSVENTILS: 10,5⁺¹₋₀ bar
PRESSION D'OUVERTURE DE LA SOUPAPE:
PRESSIONE D'APERTURA DELLA VALVOLA DI SICUREZZA:

INSTALLATION POSITION AS DRAWN
EINBAULAGE WIE GEZEICHNET
POSITION D'INSTALLATION SUIVANT DESSIN
POSIZIONE DI MONTAGGIO COME DISEGNATO

- 1= SUPPLY OF ENERGY
ENERGIEZUFLUSS
ALIMENTATION D'ENERGIE
ALIMENTAZIONE DI ENERGIA
- 21= DELIVERY OF ENERGY
ENERGIEABFLUSS
UTILISATION D'ENERGIE
UTILIZZAZIONE DI ENERGIA
- 3= EXHAUST FOR COMPRESSOR IDLING
ENTLUEFTUNG BEI LEERLAUF
ECHAPPEMENT POUR MARCHE A VIDE DU COMPRESSEUR
SCARICO PER MARCIA A FOLLE DEL COMPRESSORE

DATE		SIGNATURE		WABCO WESTINGHOUSE	
79-08-17		[Signature]		COMBINED UNLOADER	
79-08-17		[Signature]		REGULATEUR DE PRESSION	
80-03-21		[Signature]		GRUPPO DI REGOLAZIONE	
80-03-21		[Signature]		DRUCKREGLER	
27923		83-02-07		IDENTIFICATION CODE	
23837		80-03-20		975 300 550 0	
CHANGE NO. 1		DATE		CODE FOR FUNCTION	
ORIG. 975 300 550 0		140		CODE FOR SHAPE	
OF 79-01-03		A1		CODE FOR DOCUMENT	
				605	