

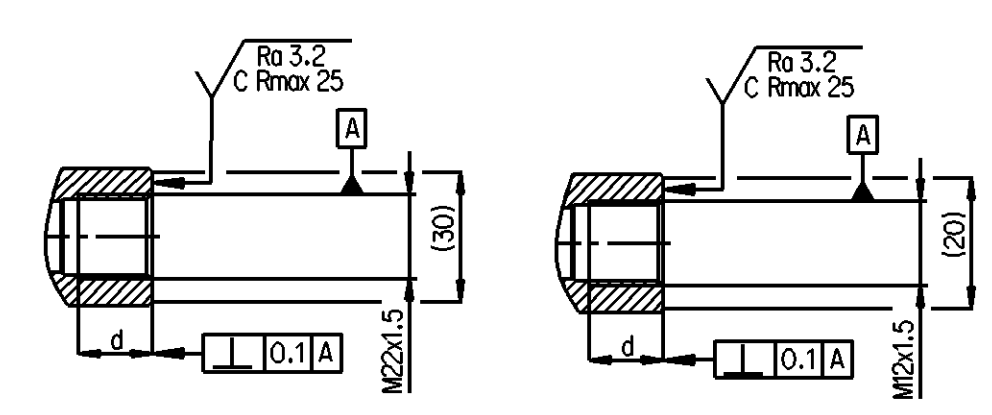
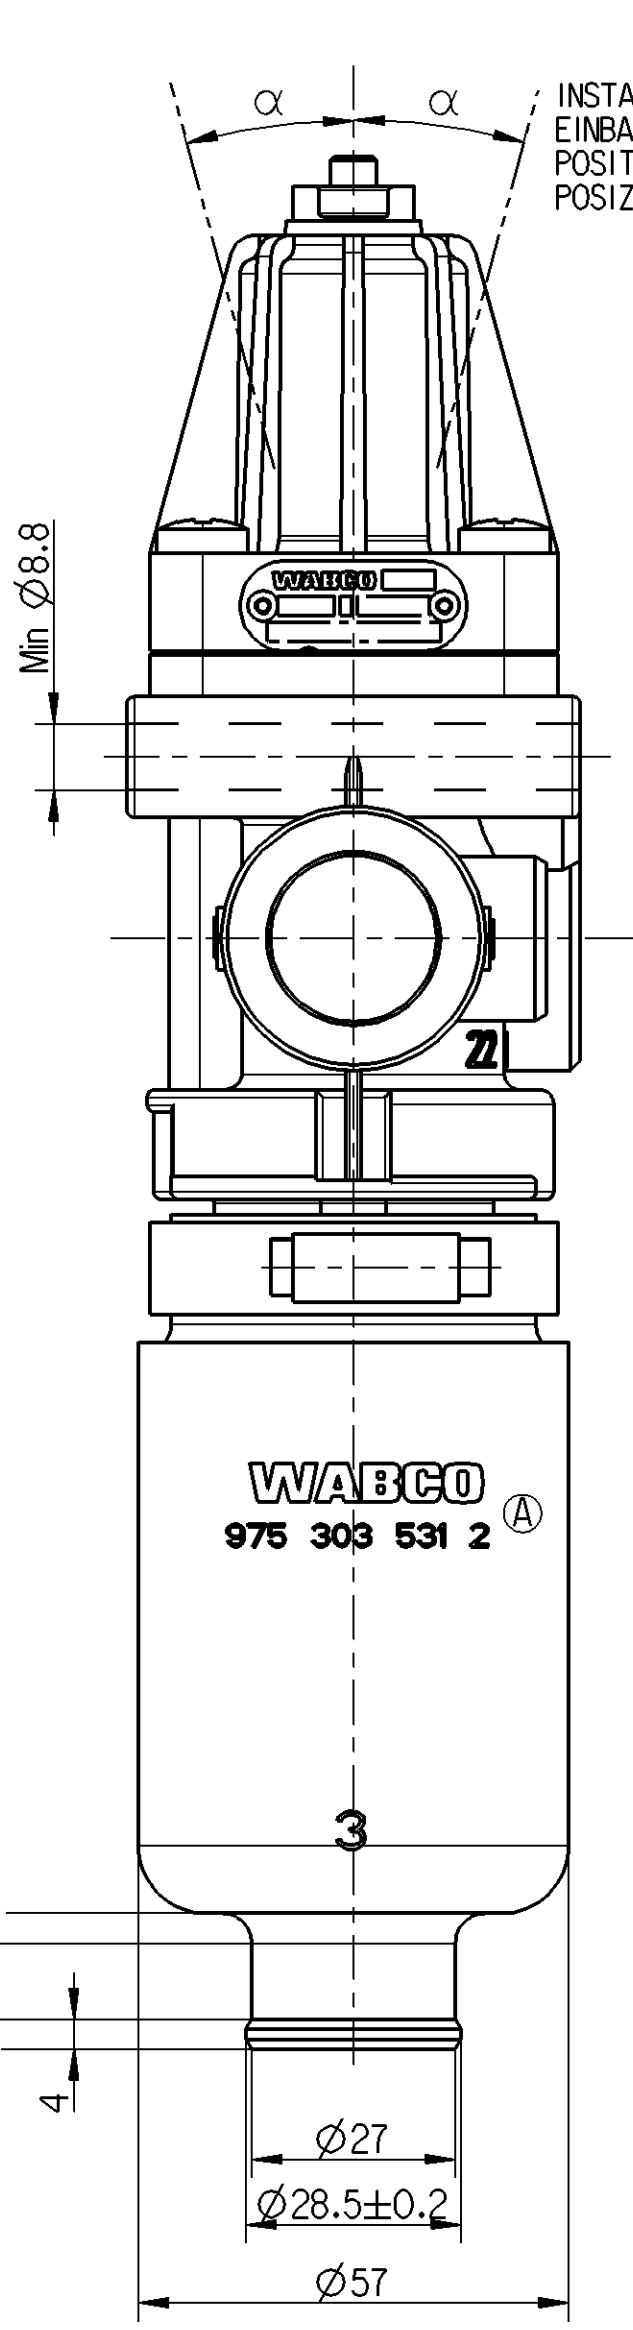
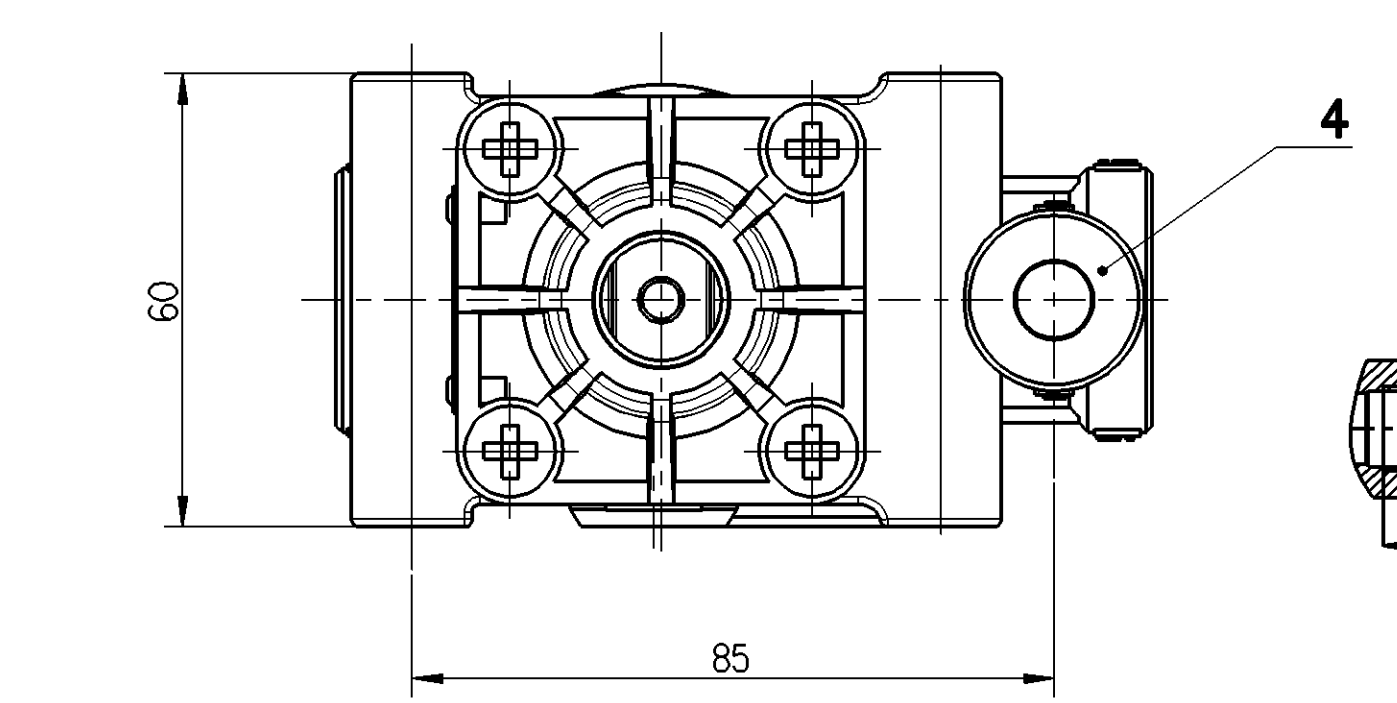


Non è permesso consegnare a terzi o riprodurre questo documento, né utilizzare il contenuto o reperire comunque noto o terzi.
E' vietata espressamente la ristampa o l'uso non autorizzato senza permesso scritto dalla WABCO.
E' vietata espressamente la ristampa o l'uso non autorizzato senza permesso scritto dalla WABCO.
Toute communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse de la WABCO.
Tous droits de propriété industrielle réservés. Toute réimpression ou utilisation non autorisée sans la permission écrite de la WABCO est formellement interdite.
Alle Rechte für den Fall der Patentierung oder Gebrauchsmuster-Eintragung vorbehalten.

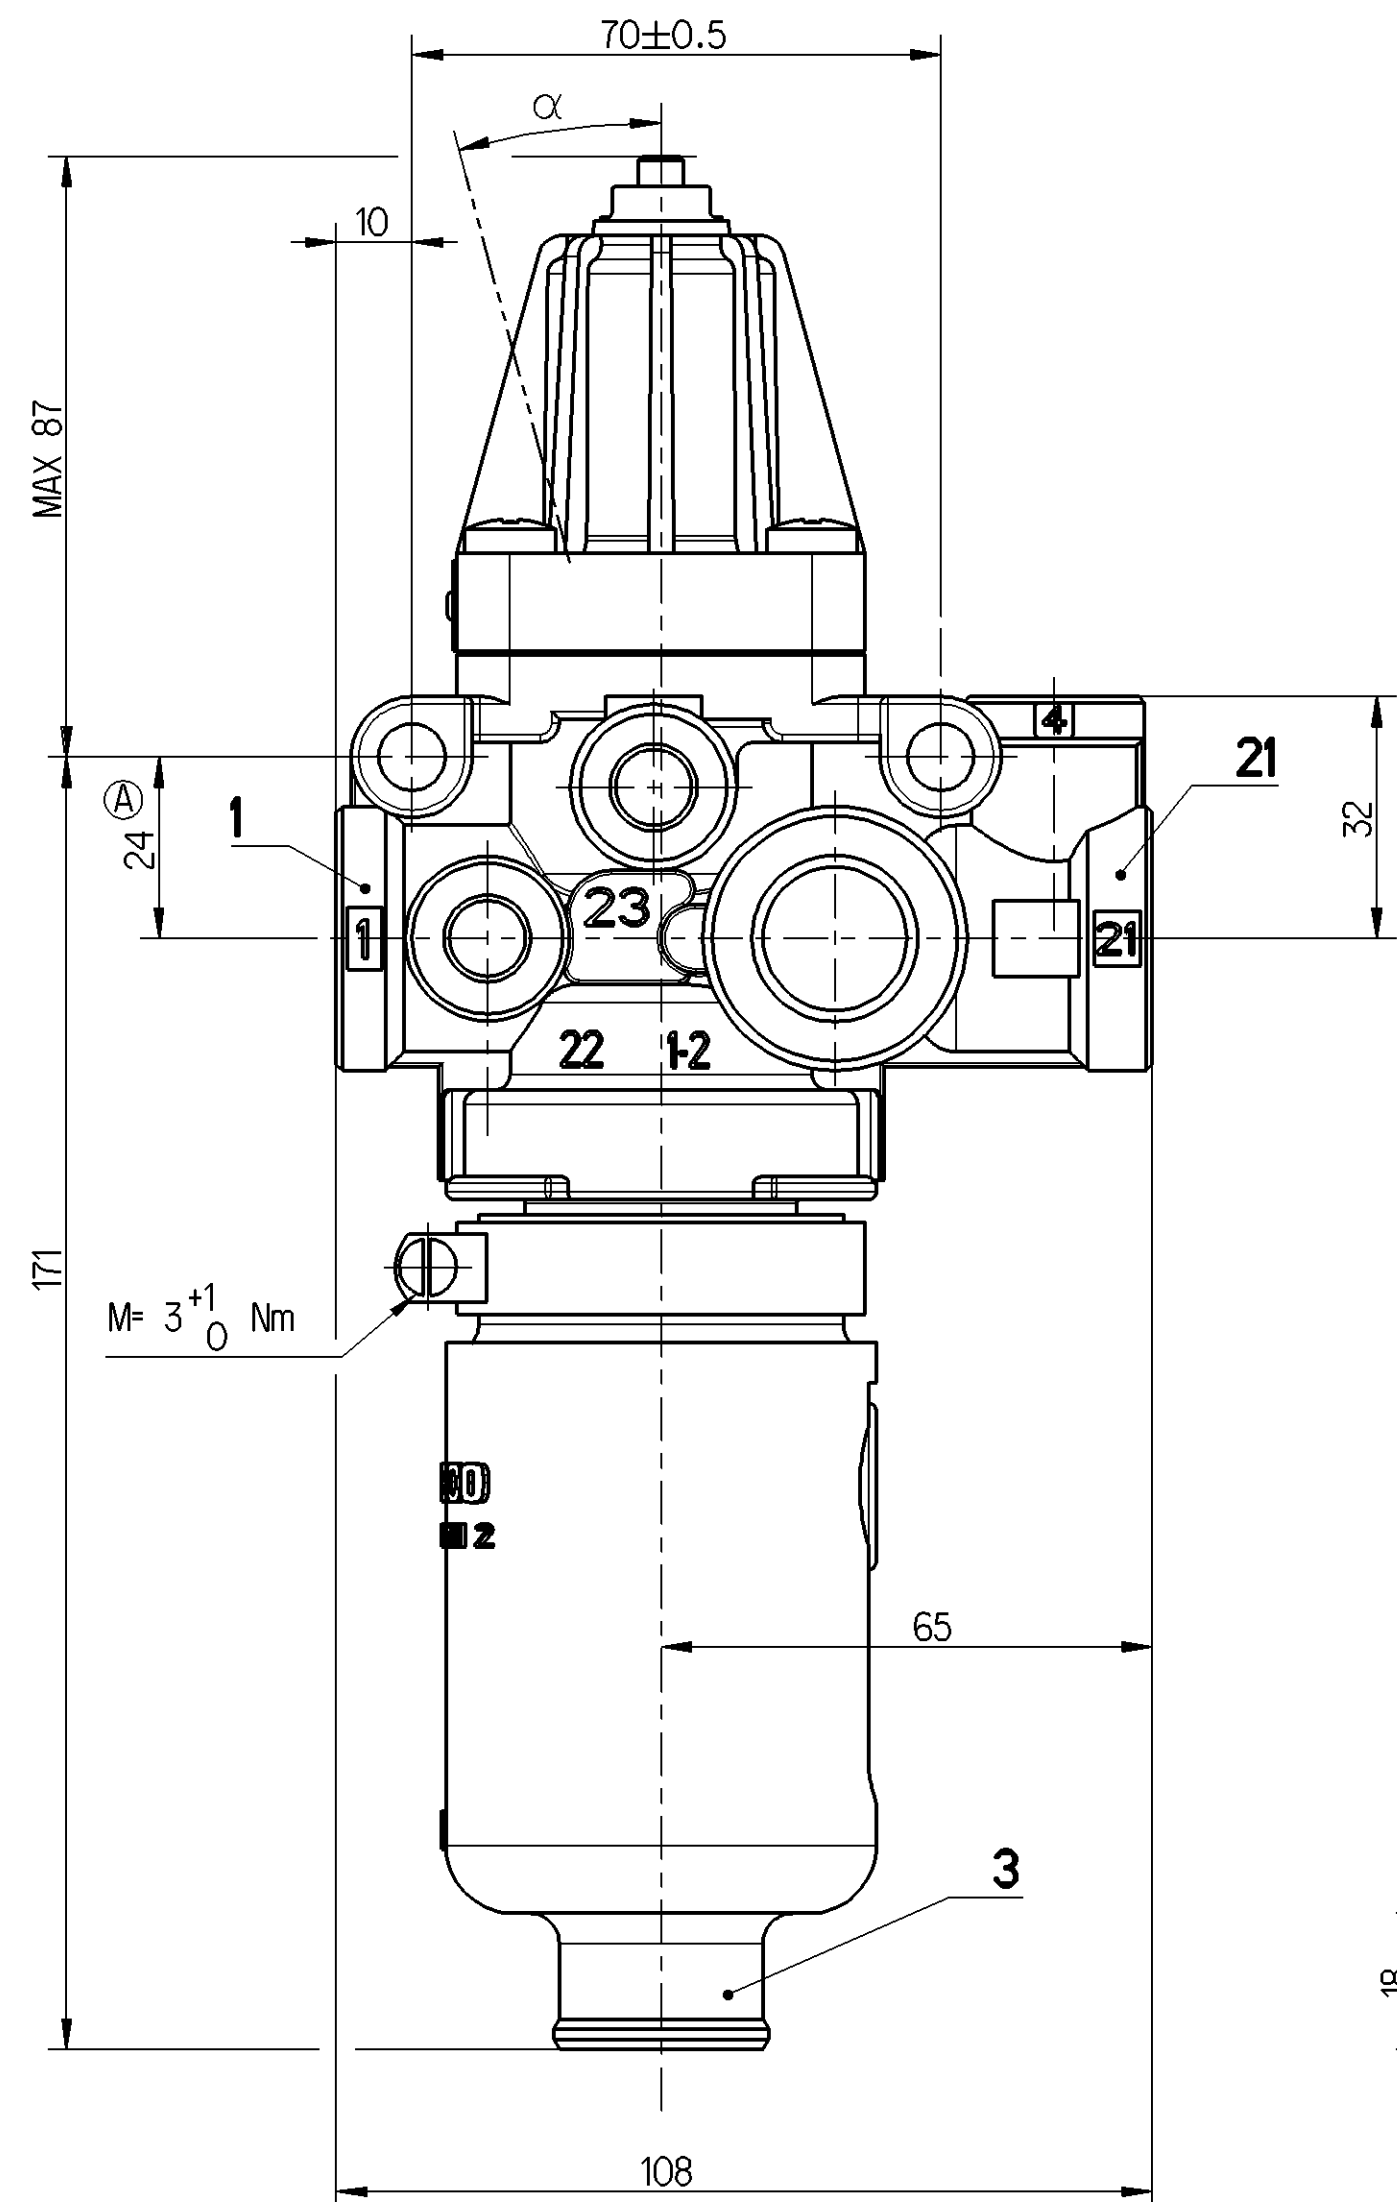

INSTALLATION POSITION
EINBAULAGE
POSITION D'INSTALLATION
POSIZIONE DI MONTAGGIO
 $\alpha = 0^\circ \dots 15^\circ$

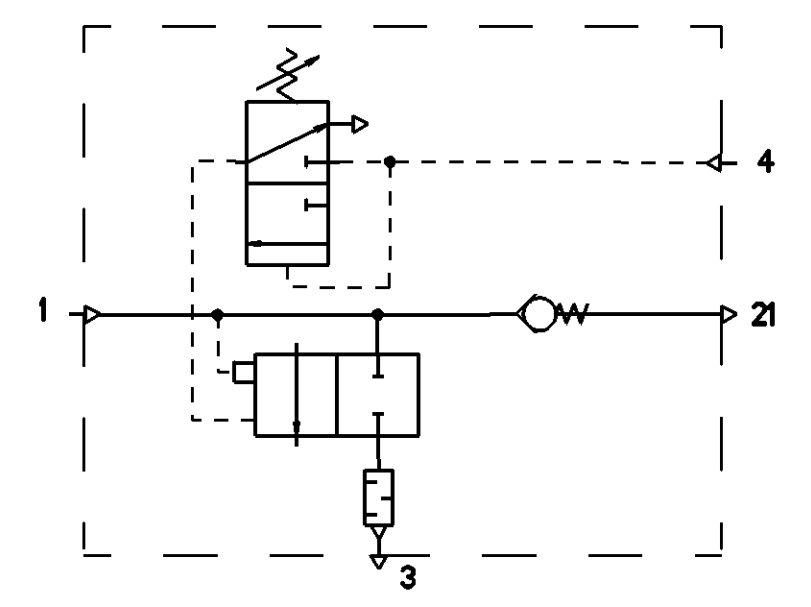

PORT ANSCHLUSS ORIFICE ORIFIZIO	FUNCTION FUNCTION FONCTION FUNZIONE	THREAD GEWINDE FILETAGE FILETTATURA
1	INLET EINGANG ALIMENTATION ALIMENTAZIONE	M22x1.5 d = min 15
21	OUTLET AUSGANG SORTIE USCITA	M22x1.5 d = min 15
3	EXHAUST FOR COMPRESSOR IDLING ENTLUEFTUNG BEI LEERLAUF ECHAPPEMENT POUR MARCHE AVIDE DU COMPRESSEUR SCARICO PER MARCIA A FOLLE DEL COMPRESSORE	-
4	CONTROL PORT STEUERANSCHLUSS ORIFICE DE COMMANDE ORIFIZIO DI COMANDO	M12x1.5 d = min 12

TECHNICAL DATA , TECHNISCHE DATEN

MEDIUM MEDIUM FLUIDE FLUIDO	AIR LUFT AIR ARIA	CUT-OUT PRESSURE ABSCHALTDRUCK PRESSION D'OUVERTURE PRESSIONE D'APERTURA Pe = 7.0±0.2 bar
MAX. ADMISSIBLE PRESSURE MAX. ZULAESSIGER DRUCK PRESSION ADMISSIBLE MAXI. PRESSIONE AMMISSIBILE MAX.	Pe = 25 bar	PRESSURE SETTING RANGE SCHALTSPANNE PLAGE DE REGULATION: GAMMA DI REGOLAZIONE ΔP = 0.6 ^{+0.4} bar
THERMAL RANGE OF APPLICATION THERMISCHER ANWENDBEREICH GAMME D'APPLICATION THERMIQUE CAMPO DI APPLICAZIONE TERMICA		OPENING PRESSURE OF THE SAFETY VALVE (INTEGR) OEFNUNGSDRUCK D. SICHERHEITSVENTILS (INTEGRIERT) PRESSION D'OUVERTURE DE LA SOUPAPE PRESSIONE D'APERTURA DELLA VALVOLA DI SICUREZZA Pe >15 bar
AMBIENT THIPERATURE UMGEBUNGSTEMPERATUR TEMPERATURE AMBIANTE TEMPERATURA AMBIENTE	-40°C...+100°C	
MEDIUM TEMPERATURE MEDIUMTEMPERATUR TEMPERATURE DU FLUIDE TEMIPERATURA DEL FLUIDO	-40°C...+150°C	TORQUES FOR CONNECTIONS ANZUNGMOMENT FUER EINSCHRAUBSTUTZEN COUPLE DE SARRAGE DES RACCORDS COPPIA DI SERRAGGIO DEI RACCORDI M12x1.5 : Mmax =21 Nm M22x1.5 : Mmax =53 Nm

General Specification: JED-334-0 , Size ISO 14405-1 E						Copyright WABCO®		WABCO				
Further Technical Data: Product Specification						Date		Signature		COMBINED UNLOADER DRUCKREGLER REGULATEUR DE PRESSION GRUPPO DI REGOLAZIONE		
Doc. Code: 035		Sheet: 1 To 5				Drawn		Zawisza				
General Tolerances JED-261 Range of Nominal Dimensions (± mm)						Checked		2013-11-06 Czapiewski				
						Expert		ZAWISZA				
Class	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400							
Fine		0.5	1.0	1.5	2.0	±3°		Material No. 975 303 002 0		Date of first issue: 2013-10-31		
Medium	X	1.0	2.0	3.0	4.0					Doc.Code	Language	Sheet
Coarse		2.0	3.5	5.0	6.5					005	ML	1/1
Tapped Holes acc. JED-152						Size		CAD System			Replacement for	
1) Tolerance Class Applied Crossmarked						A 2	Pro/E			ECN-No. -		Revision 2 x A