
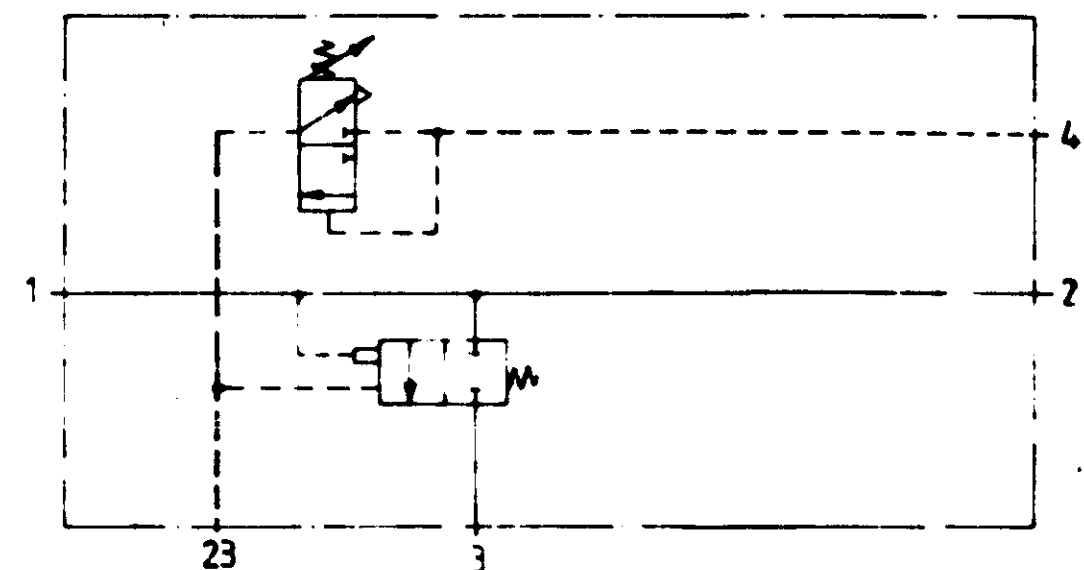
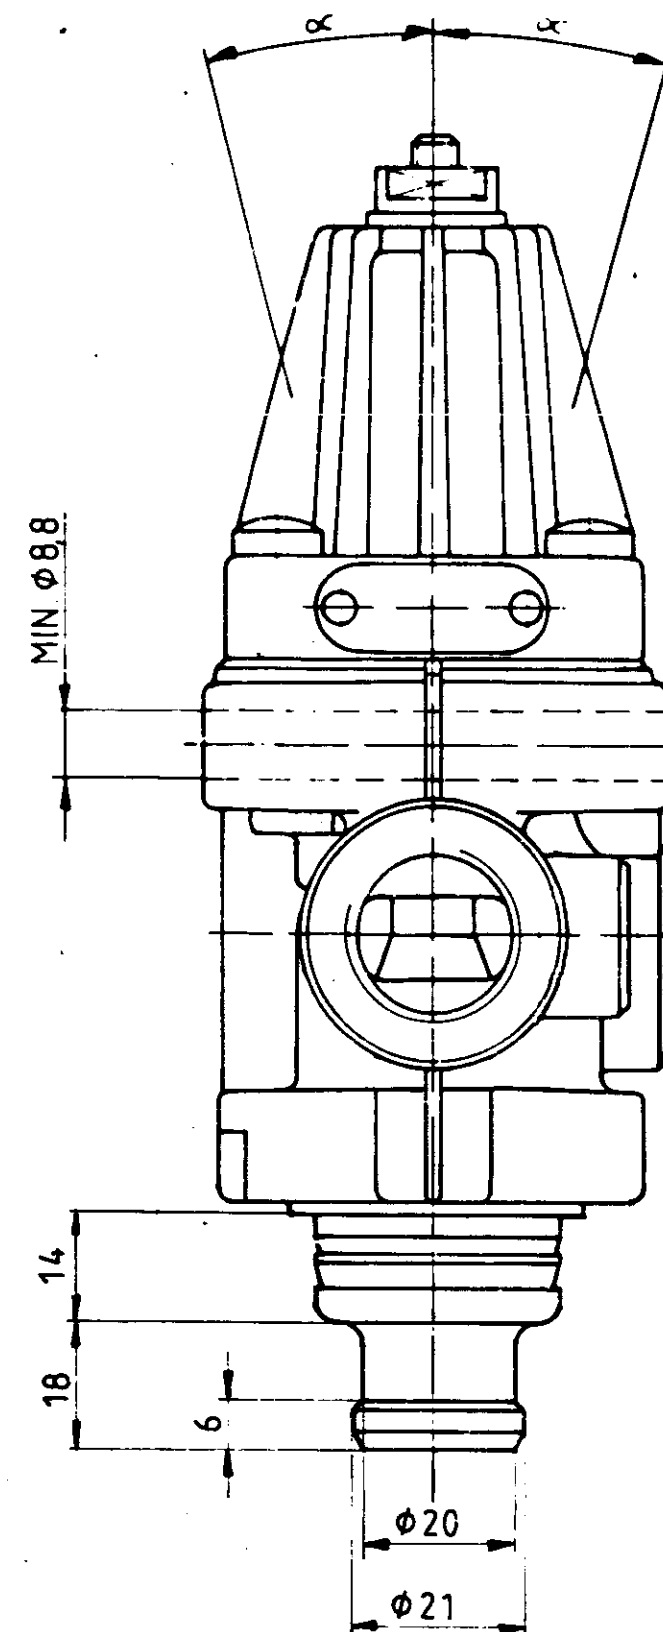
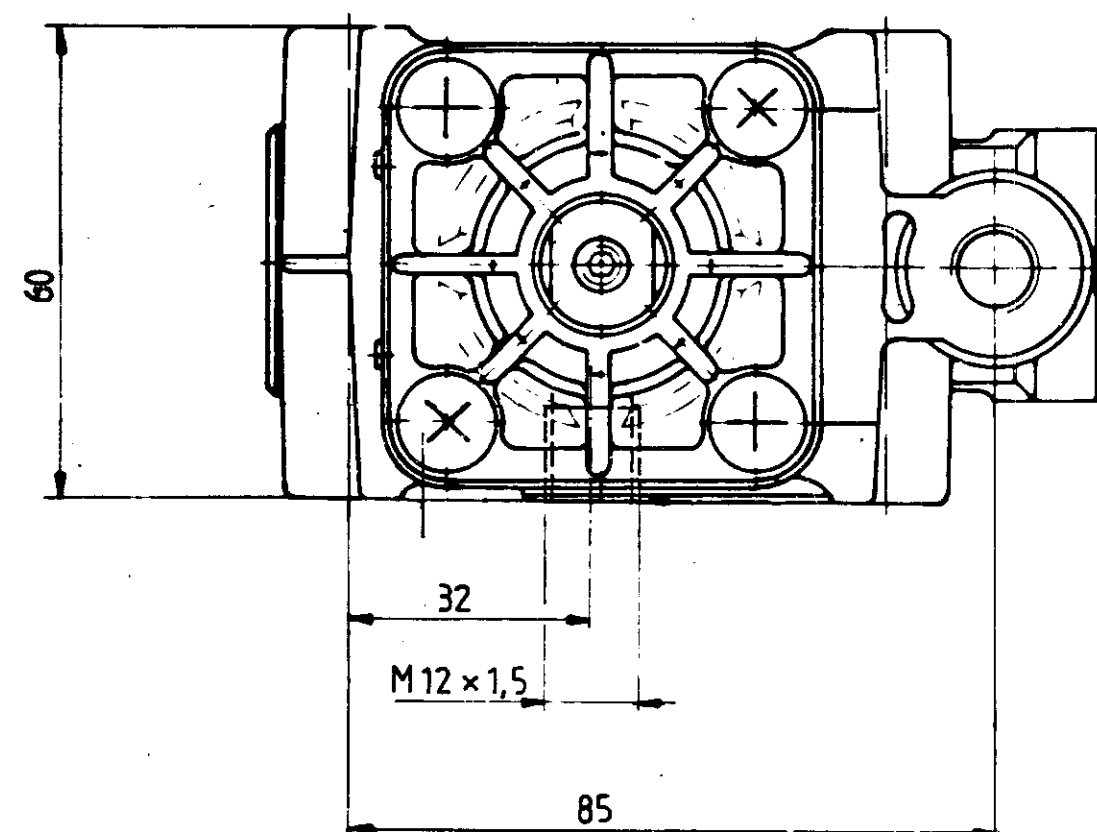


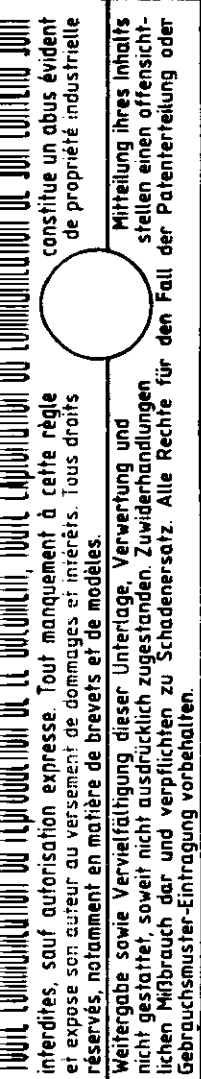

1 = INLET
EINGANG
ALIMENTATION
ALIMENTAZIONE

21= OUTLET
AUSGANG
SORTIE
USCITA

23= OUTLET (FOR CONTROL IMPULSE) MAX VOLUMEN OF AIR = 0.061
AUSGANG (FUER STEUERIMPULS) MAX. ZU BELUEFTENDES VOLUMEN $V_{MAX} = 0.061$
SORTIE
USCITA

4 = CONTROL PORT
STEUERANSCHLUSS
ORIFICE DE COMMANDE
ORIFIZIO DI COMANDO

3= EXHAUST FOR COMPRESSOR IDLING
ENTLUEFTUNG BEI LEERLAUF
ECHAPPEMENT POUR MARCHÉ A VIDE DU COMPRESSEUR
SCARICO PER MARCIA A FOLLE DEL COMPRESSORE

INSTALLATION POSITION
EINBAULAGE
POSITION D'INSTALLATION
POSIZIONE DI MONTAGGIO

 $\alpha = 0^\circ, 15^\circ$

FURTHER TECHNICAL DATA SEE				L		COPYRIGHT		WABCO				CLAYTON DEWANDORE	
IDENTIFICATION No 975 303 480 0				K		DATE		SIGNATURE		COMBINED UNLOADER DRUCKREGLER REGULATEUR DE PRESSION GRUPPO DI REGOLAZIONE			
CODE FOR DOCUMENT 605 SHEET 2/2 TO				J		DRAWN		87-08-25 <i>Boime</i>					
GENERAL TOLERANCES				H		CHECKED		87-08-26 <i>Boime</i>					
				G		STANDARDIZATION		87-12-17 <i>Boime</i>					
				F									
CLASS RANGE OF NOMINAL DIMENSIONS (2 mm)				E		MASS		SCALE		PRODUCT IDENTIFICATION NO.			
II $\begin{matrix} < 50 & > 50 \\ & & > 180 \end{matrix}$				D		0.65 kg		1:1		975 303 085 0			
I $\begin{matrix} < 0.5 & 0.5 & 1 & 1.5 & 2 \end{matrix}$				C		SIZE		T.R.		CODE FOR DOCUMENT 605 SHEET 1/1			
II $\begin{matrix} 1 & 2 & 3 & 4 \end{matrix}$				B		A 2		140		CODE F PROD. GROUP CODE FOR SHAPE REPLACEMENT FOR			
III $\begin{matrix} 2 & 3.5 & 5 & 6.5 \end{matrix}$				A						CODE F PROD. GROUP CODE FOR SHAPE REPLACEMENT FOR			
TAPPED HOLES ACC ISO 4039				DN-NO		REV		DATE					
TOLERANCE CLASS APPLIED CROSSMARKED													