
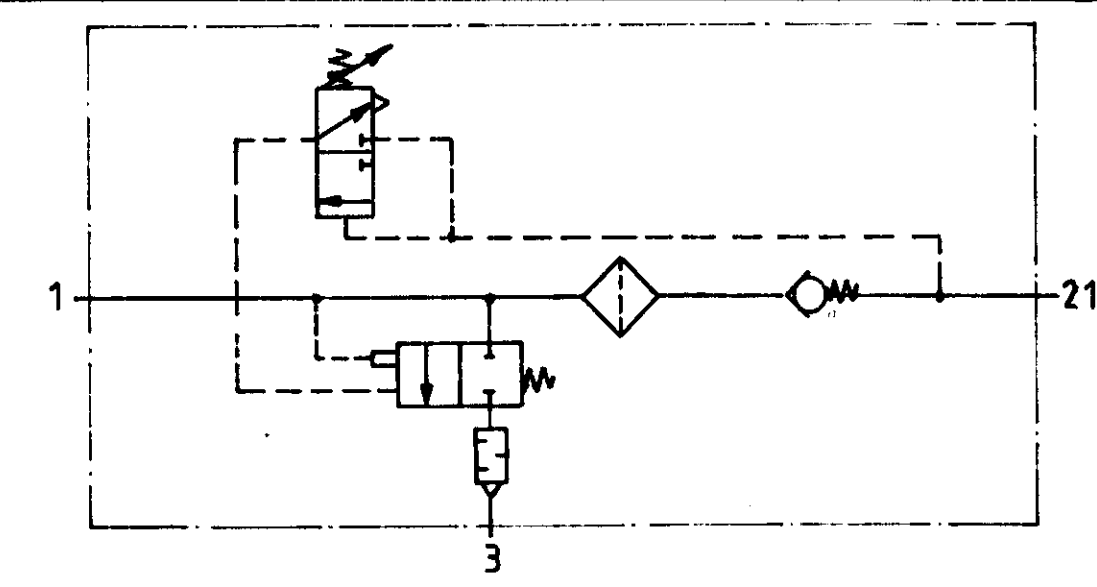


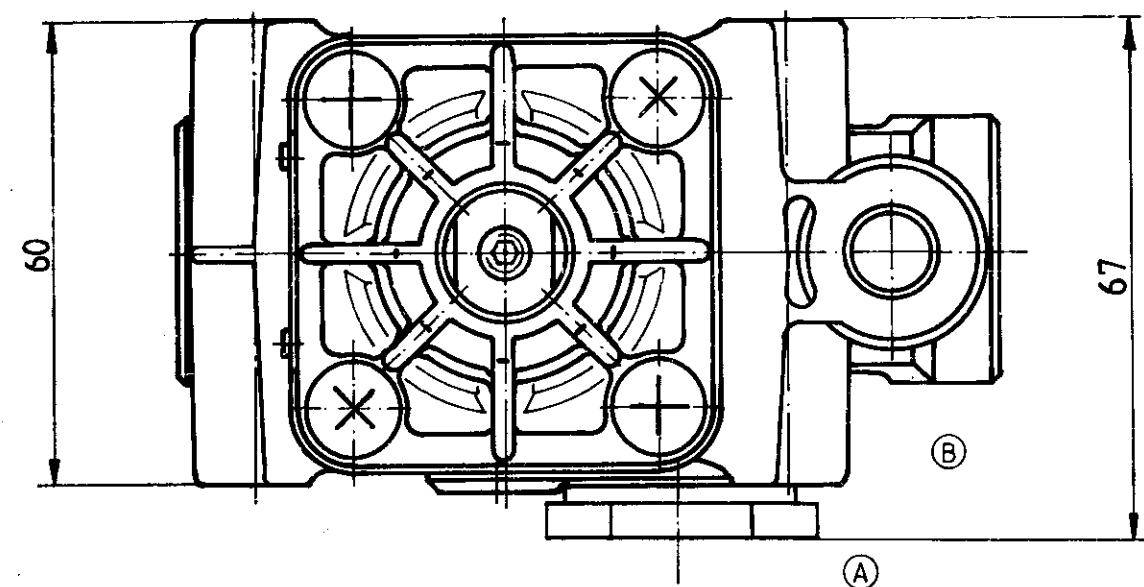

1 = INLET EINGANG ALIMENTATION ALIMENTAZIONE $v_{\max} = 460 \text{ l/min}$ FREE AIR ENTSPANNTE LUFT (BEI $p_e = 8 \text{ bar}$) AIR DETENDU ARIA LIBERATA

21= OUTLET
AUSGANG
SORTIE
USCITA

3= EXHAUST FOR COMPRESSOR IDLING
ENTLUEFTUNG BEI LEERLAUF
ECHAPPEMENT POUR MARCHE A VIDE DU COMPRESSEUR
SCARICO PER MARCIA A FOLLE DEL COMPRESSORE

INSTALLATION POSITION: $\alpha = 0^\circ \dots 15^\circ$
EINBAULAGE:
POSITION D'INSTALLATION:
POSIZIONE DI MONTAGGIO:

FURTHER TECHNICAL DATA SEE										COPYRIGHT BY WABCO										WABCO									
IDENTIFICATION No 975 303 220 0										DATE										SIGNATURE									
CODE FOR DOCUMENT 605 SHEET 2/2 TO										DRAWN										COMBINED UNLOADER									
GENERAL TOLERANCES										41-08-18										REGULATEUR DE PRESSION									
CLASS										CHECKED										GRUPPO DI REGOLAZIONE									
RANGE OF NOMINAL DIMENSIONS (± mm)										81-08-18										DRUCKREGLER									
I) ≤ 50 > 50 > 180 > 400										STANDARDIZATION																			
II) 0.5 1 1.5 2										81-08-18																			
III) 2 3.5 5 6.5										MASS										SCALE									
TAPPED HOLES ACC ISO 4039										0.8										1:1									
1) TOLERANCE CLASS APPLIED CROSSMARKED										SIZE										TR1									
2) TOLERANCE CLASS APPLIED CROSSMARKED										A2										140									
3) TOLERANCE CLASS APPLIED CROSSMARKED										CODE FOR FUNCTION										CODE FOR SHAPE									
4) TOLERANCE CLASS APPLIED CROSSMARKED										502										REPLACEMENT FOR									
5) TOLERANCE CLASS APPLIED CROSSMARKED										884 003 913 0																			