
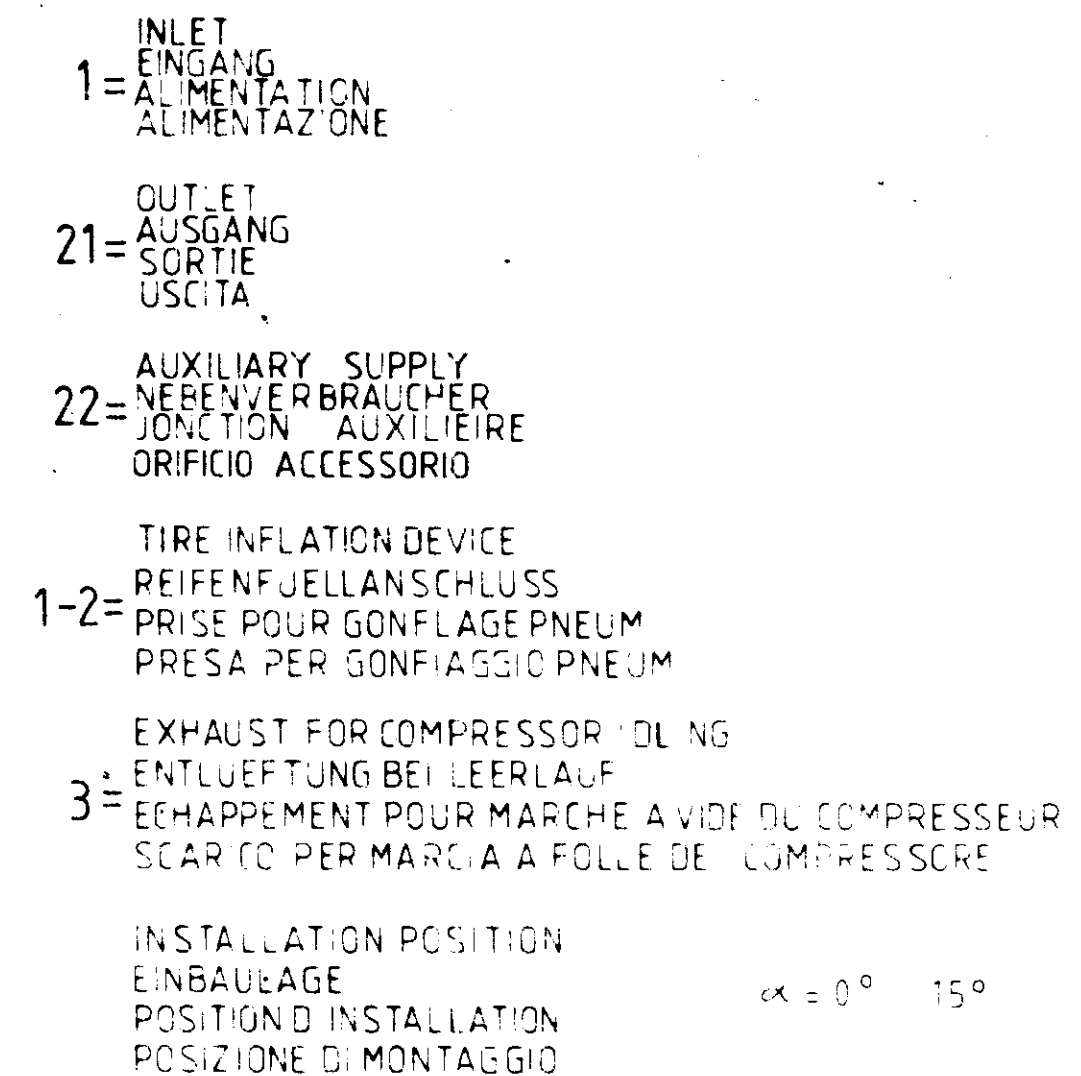
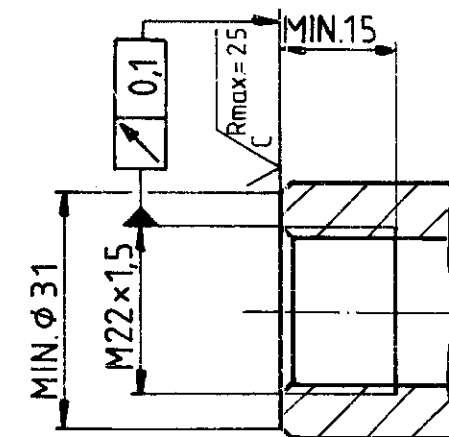


Toute communication ou reproduction de ce document, toute exploitation ou utilisation non autorisée sans l'autorisation écrite préalable du titulaire des droits réservés est formellement interdite.		Mitteilung hierin ist als unzulässig zu betrachten. Jede Vervielfältigung oder Verbreitung ohne schriftliche Genehmigung des Rechteinhabers ist ausdrücklich untersagt.
--	--	--

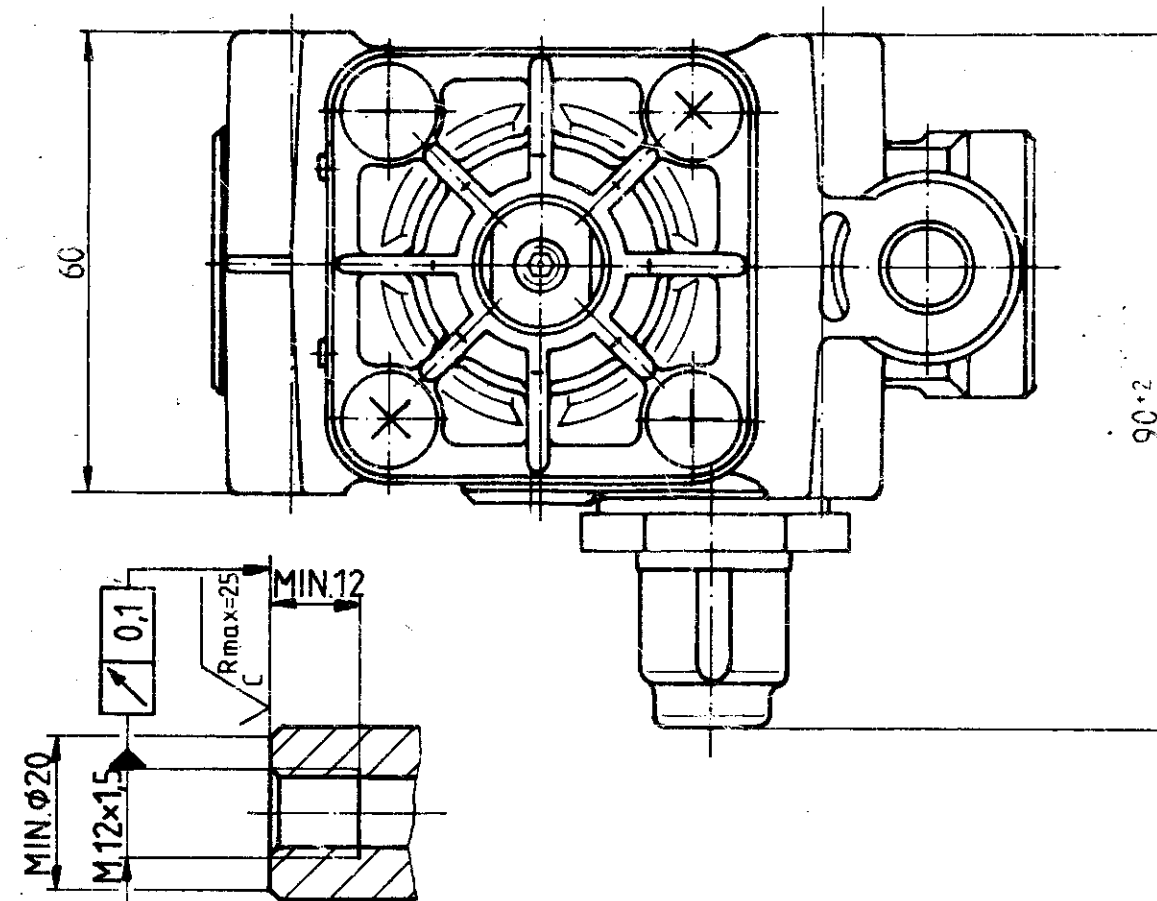

POSITION OF VALVE STEM FOR TIRE INFLATING
STOESSELSTELLUNG FUER REIFENFUELLEN
POSITION DU POUSSOIR POUR GONFLAGE DES PNEUS
POSIZIONE DELLO STELO PER GONFIAGGIO PNEUMATICI

FURTHER TECHNICAL DATA SEE				
IDENTIFICATION No 975 303 060 0				
CODE FOR DOCUMENT 605		SHEET 2	TO 2	
GENERAL TOLERANCES				
CLASS	RANGE OF NOMINAL DIMENSIONS (in mm)			
	≤ 50	50 - 180	180 - 400	> 400
I	0.5	1	1.5	2
II	1	2	3	4
III	2	3.5	5	6.5
TAPPED HOLES ACC ISO 4039				
TOLERANCE CLASS APPLIED CROSSMARKED				

COPYRIGHT BY WABCO		WABCO	
DATE	SIGNATURE		
DRAWN			
85-04-16	P. Brink		
CHECKED		COMBINED UNLOADER DRUCKREGLER REGULATEUR DE PRESSION GRUPPO DI REGOLAZIONE	
85-04-16	Reine Nill		
STANDARDIZATION			
85-04-22	Brink		
MASS	SCALE	IDENTIFICATION	
0,7	1:1	975 303 473 0	
SIZE	TRI	CODE FOR DOCUMENT	
A2	140	605	
CODE FOR FUNCTION		SHEET	
502		1/1	
CODE FOR SHAPE		REPLACEMENT FOR	