
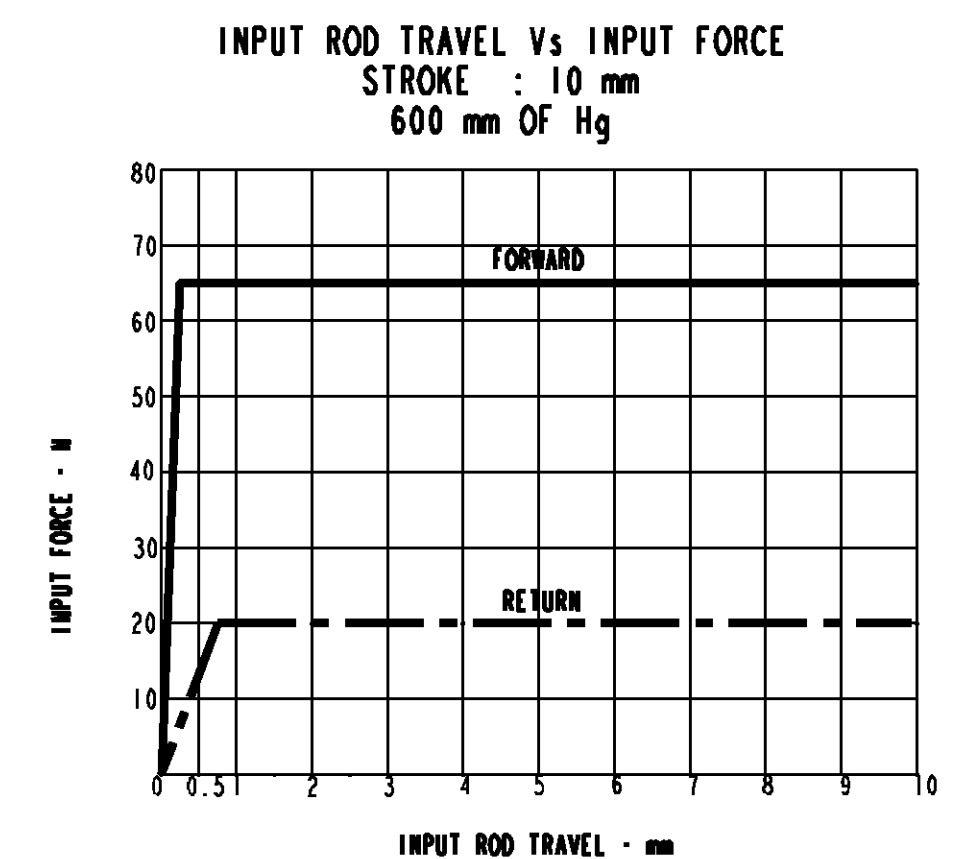
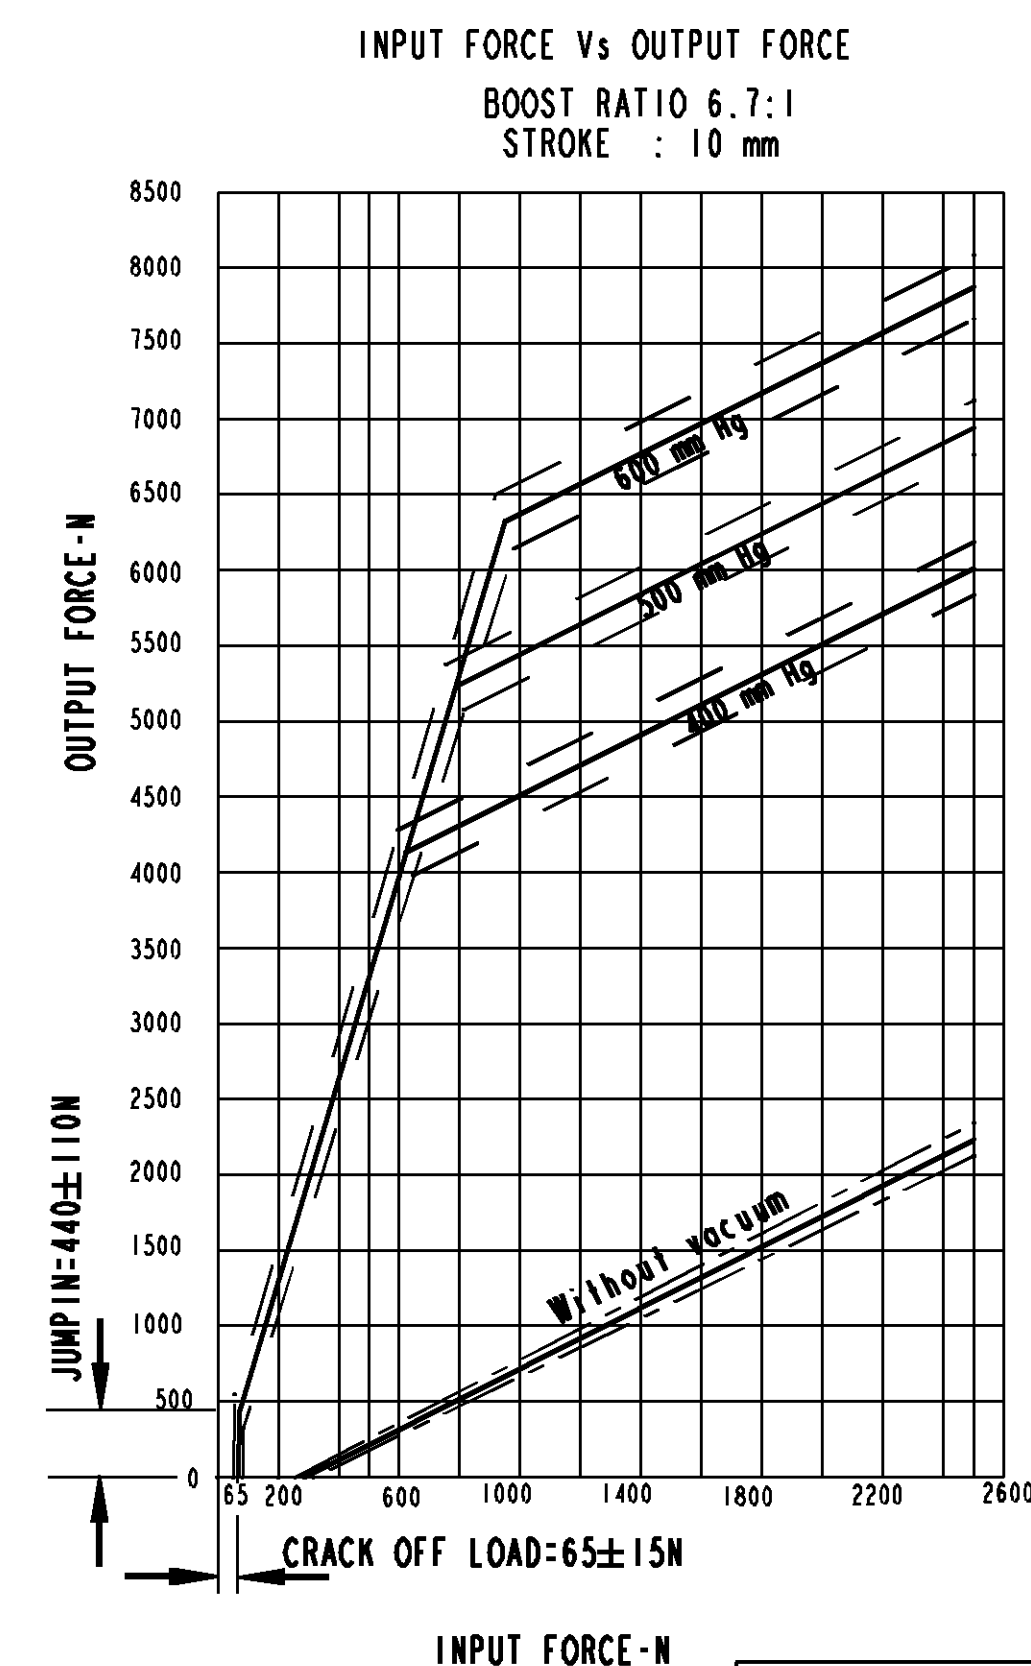


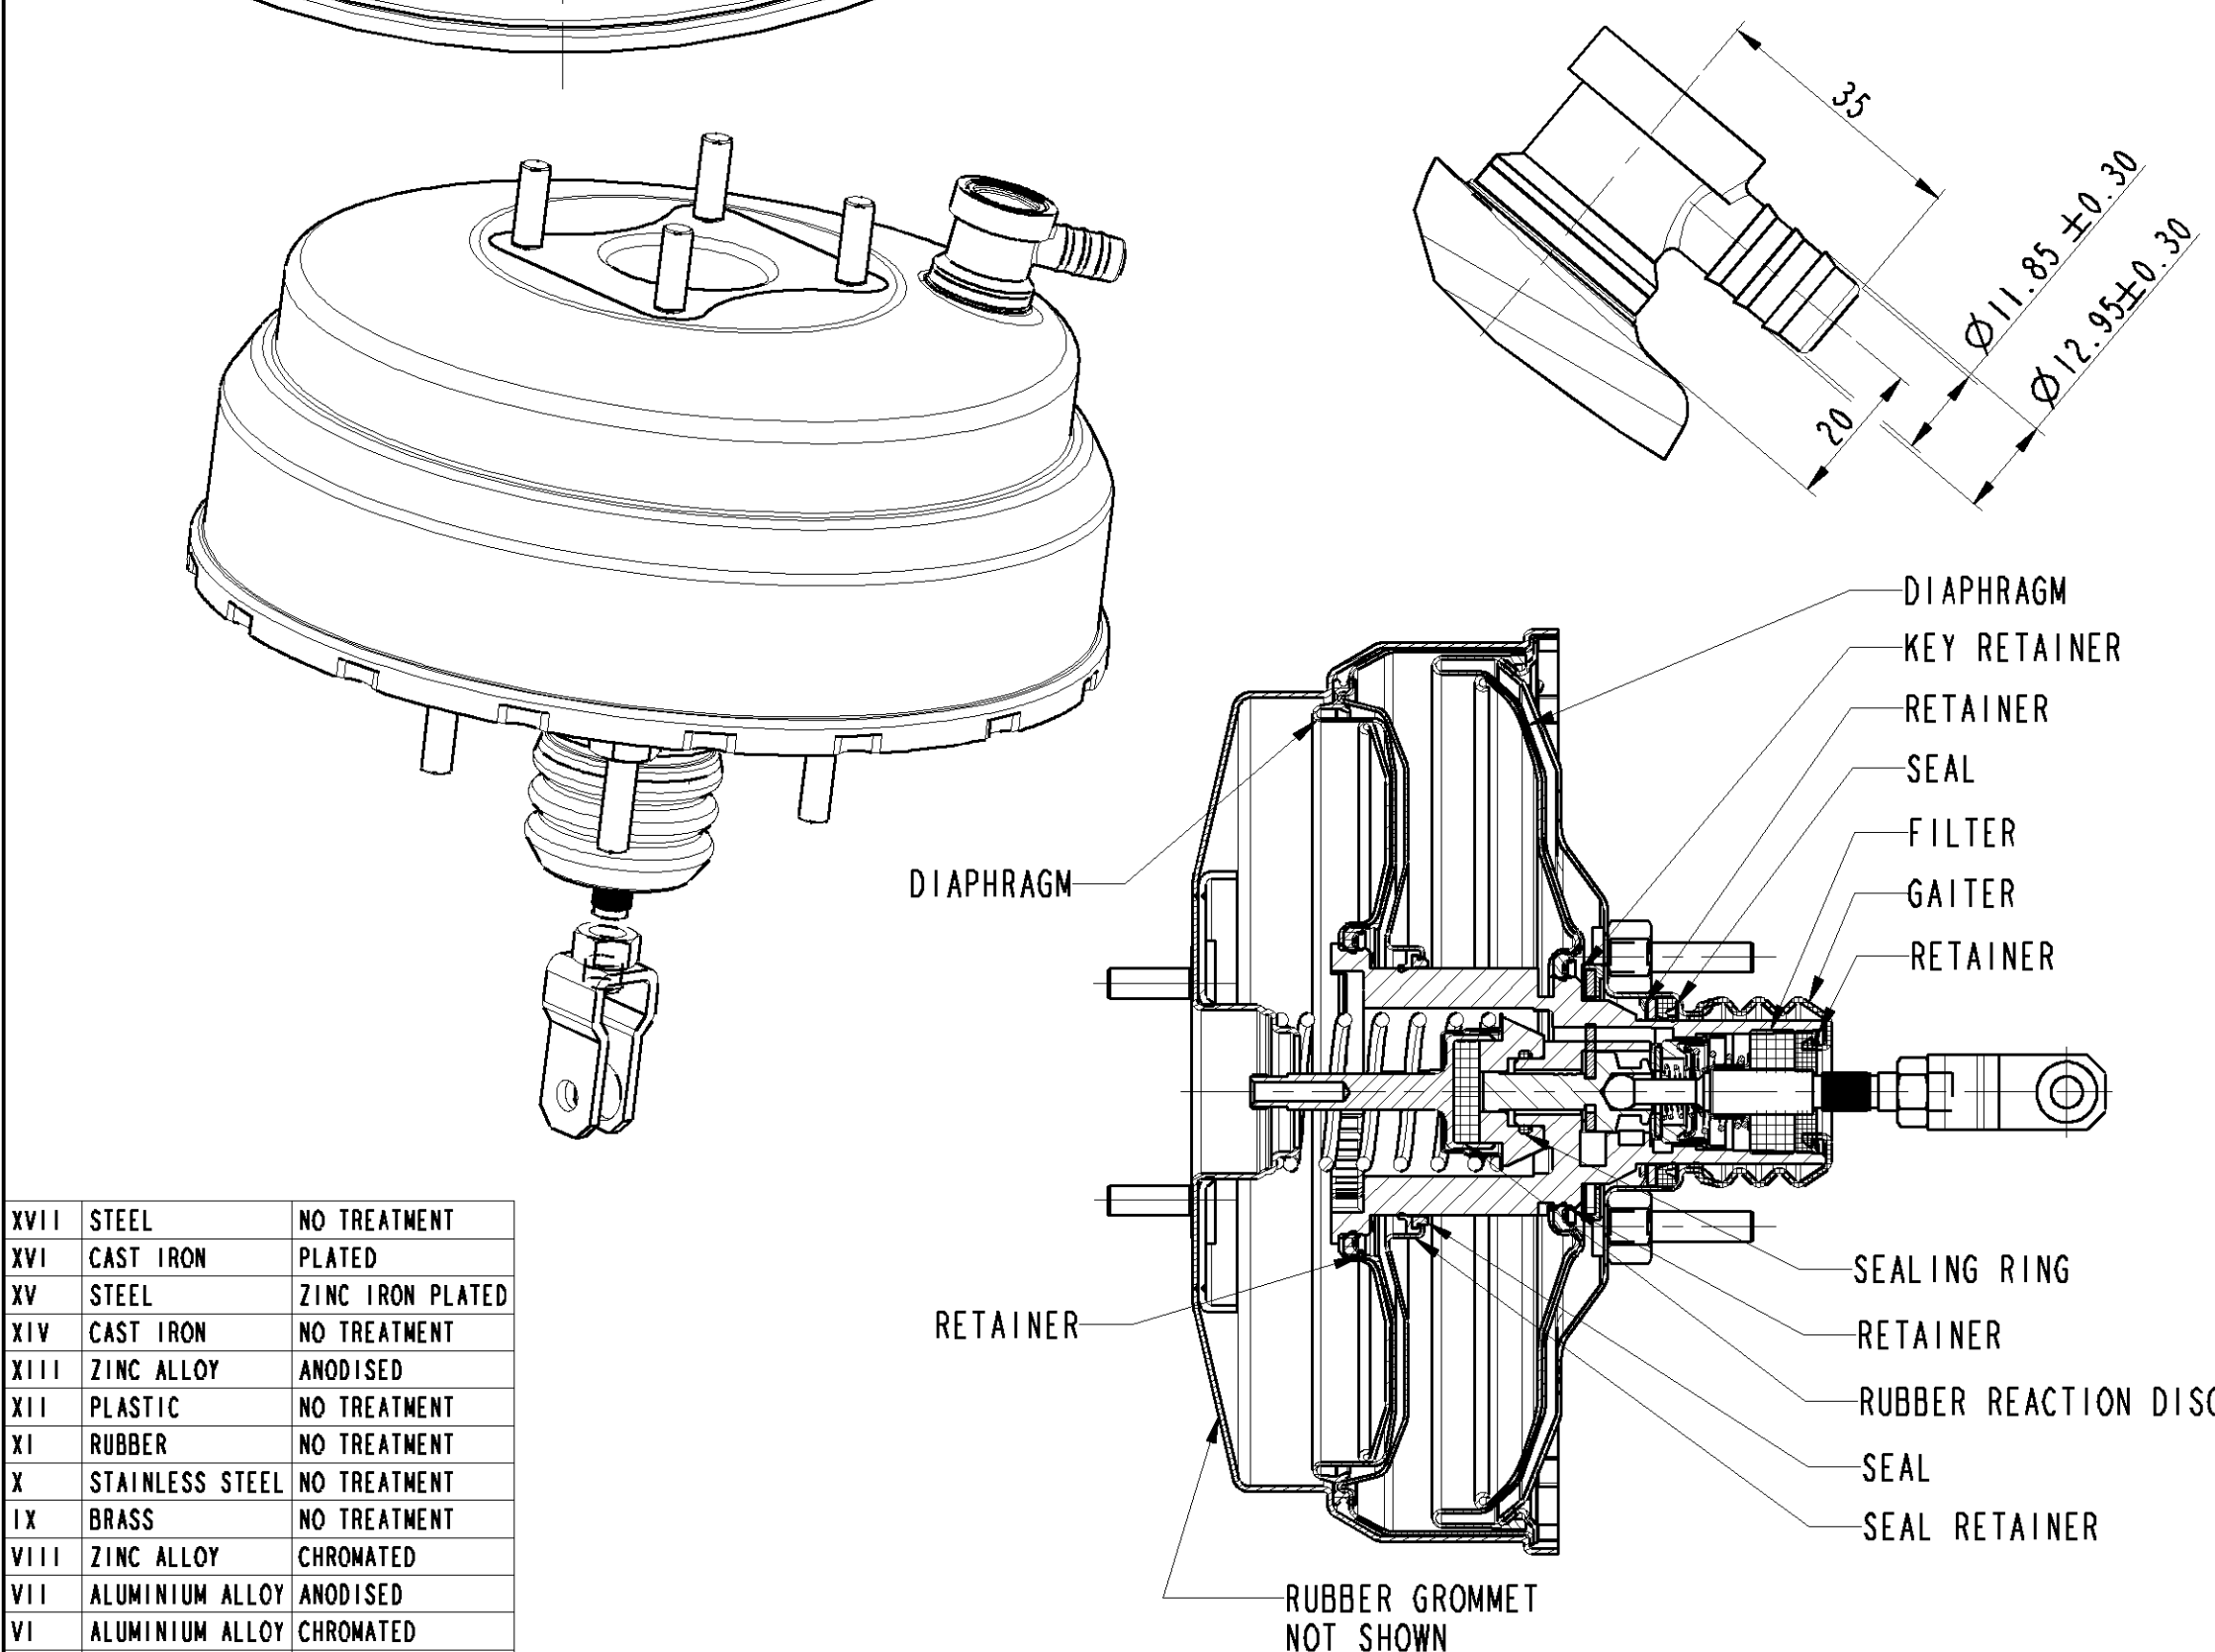

NOTES:
VALVE WILL MEET THE REQUIREMENTS AS PER JASO C452
PRODUCT SPECIFICATION NO:PSSC 144C , ISSUE No.5, DATE: 26.05.06
NOMINAL DIAMETER 225 + 200 mm
HOUSINGS COLOUR: BLACK
WEIGHT: 4.6 Kg
MINIMUM STROKE:30mm
MAXIMUM STROKE:32mm
ARTICULATION TO OPERATING ROD IN ANY DIRECTION 3°
FOR CORRECT FUNCTIONING OF THE ASSEMBLY, THE BOOSTER
INPUT ROD MUST FULLY RETURN TO ORIGINAL POSITION

CODE	PROTECTION		
	SIGN	DATE	MATERIAL
DRN	TJ	09.10.2013	ALTERNATIVE
CHD	DPK	09.10.2013	SURFACE
APD	AGM	09.10.2013	RAW PAR

CONFIDENTIAL DRAWING

THIS DRAWING IS THE SOLE PROPERTY OF WABCO. IT SHOULD NOT BE COPIED OR
COMMUNICATED TO ANY PERSON WITHOUT THE WRITTEN APPROVAL OF WABCO.

© 2005

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN mm.
REMOVE BURRS AND SHARP EDGES FROM FINISHED PARTS.
ALL DIMENSIONS ARE AFTER SURFACE PROTECTION/ TREATMENT
MALE THREAD TO IS 14962 (PART3) 6h : 2001
FEMALE THREAD TO IS 14962 (PART3) 6H : 2001

	SCALE	
	1:1	
		

DOUBLE DIAPHRAGM VACUUM BRAKE VALVE

PART No.
M 450640. GA