
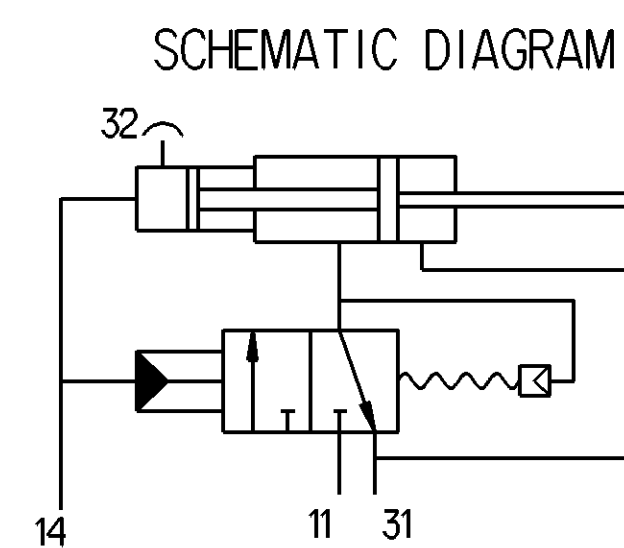
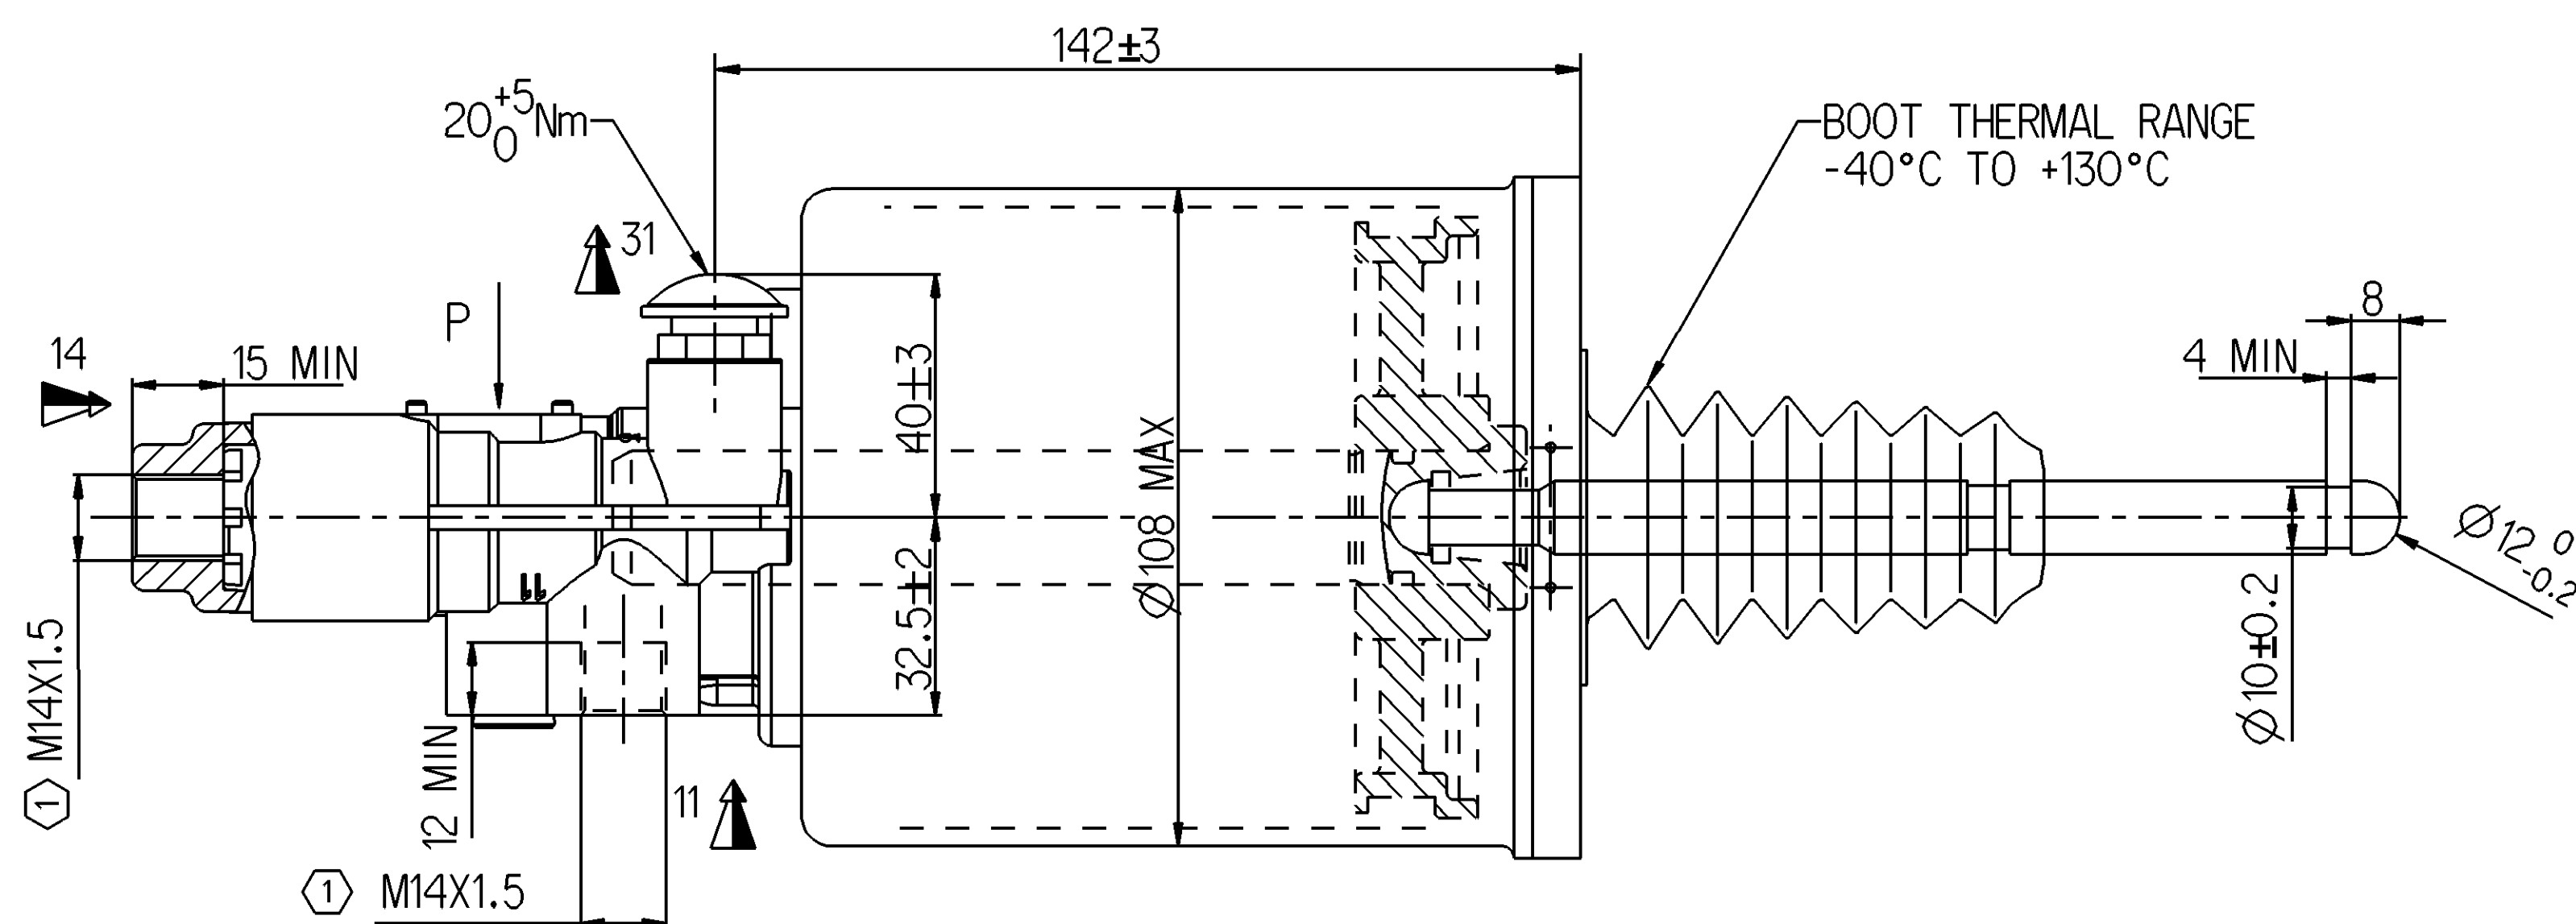
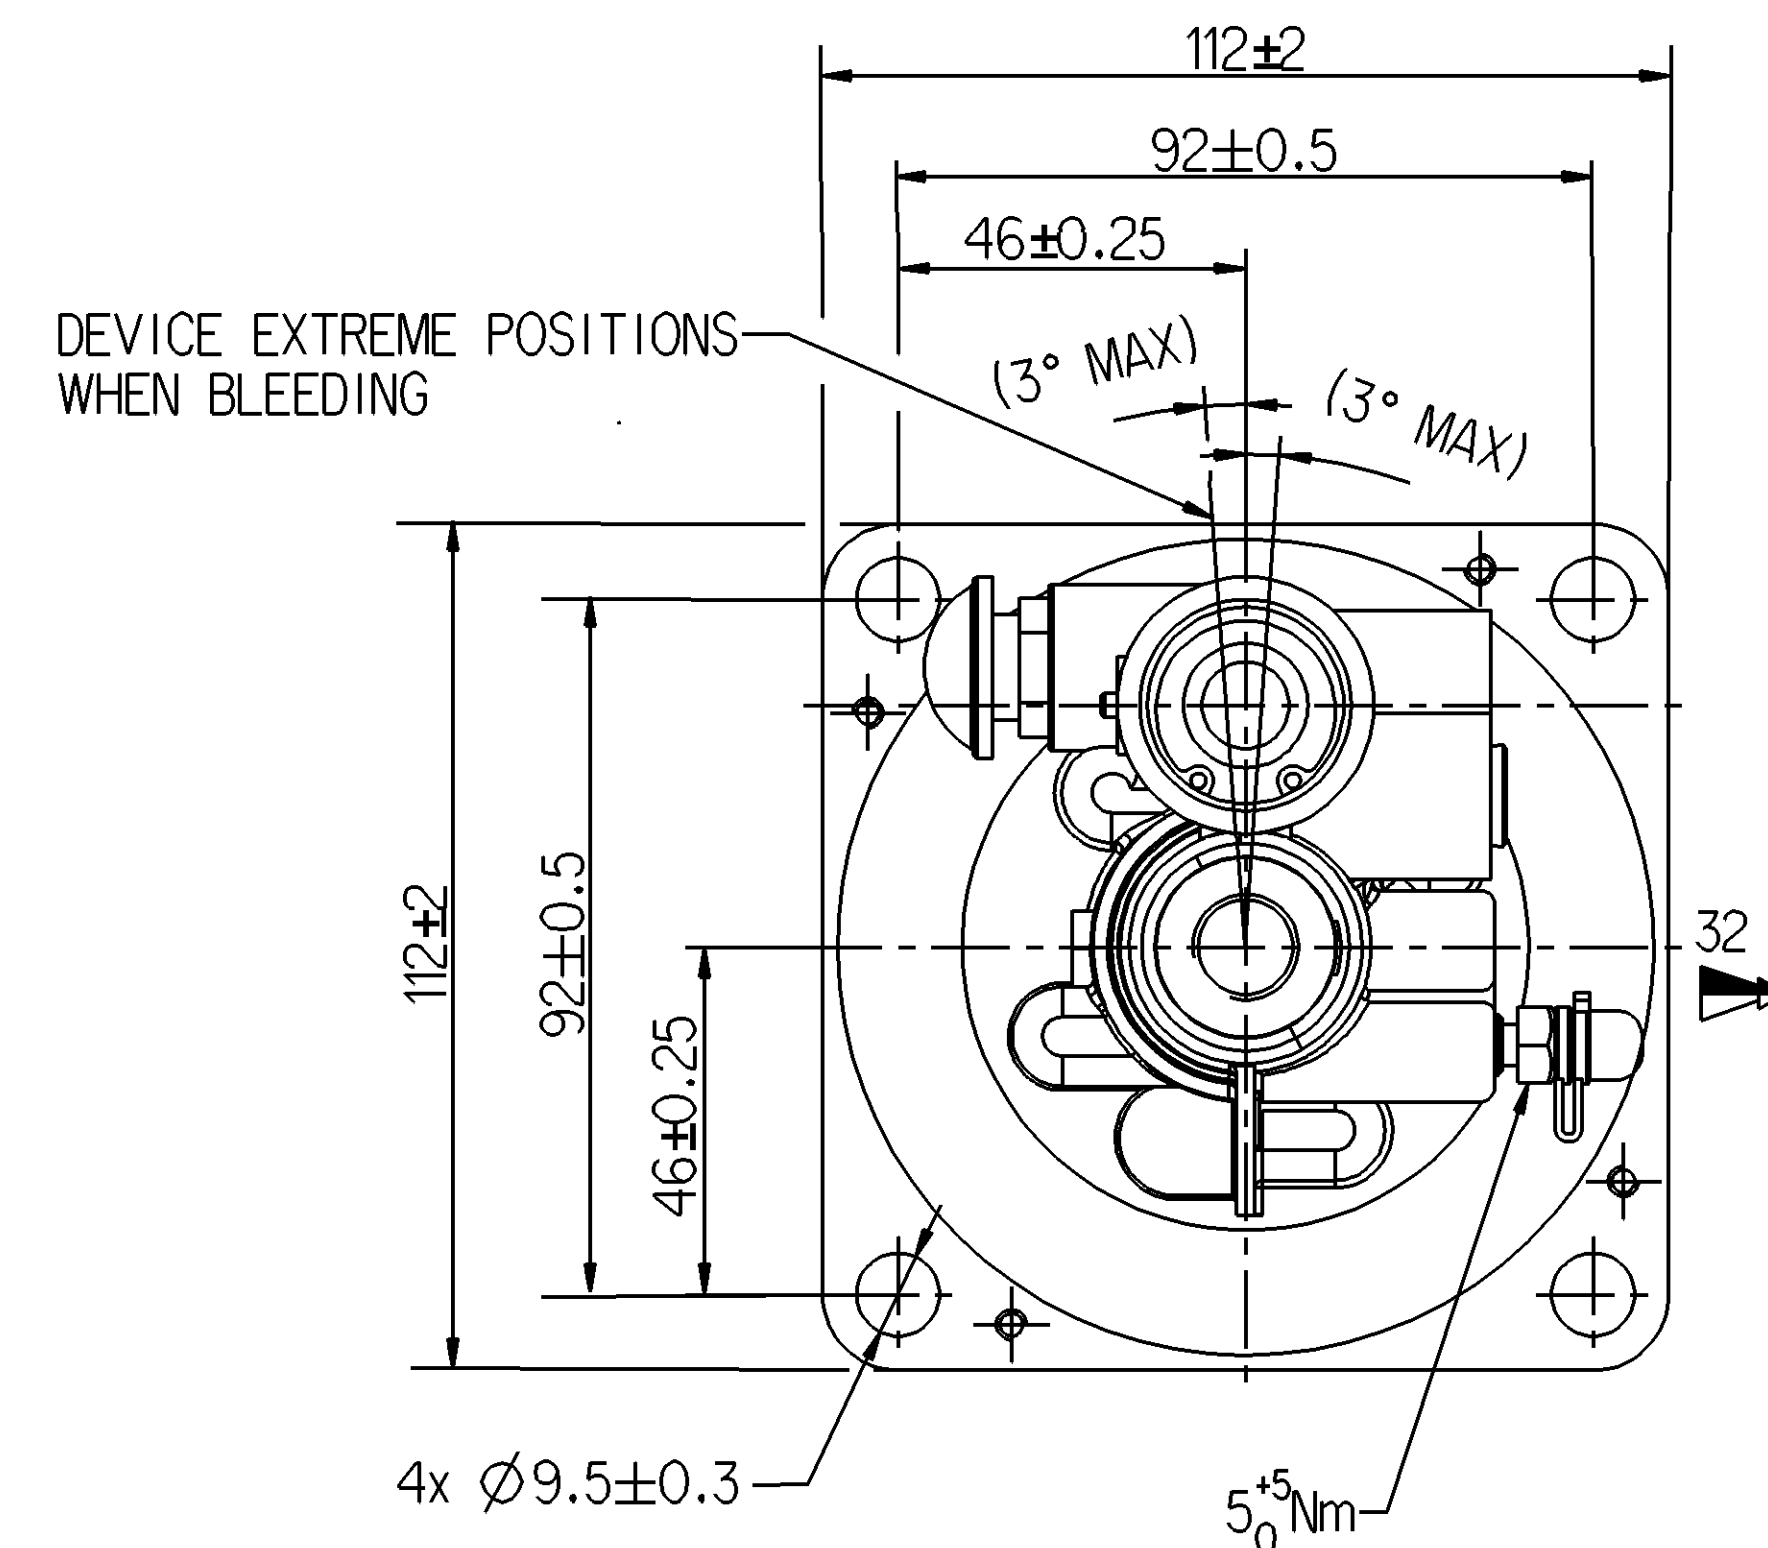


<1>	SAFETY CHARACTERISTICS	0
<2>	SIGNIFICANT CHARACTERISTICS	0


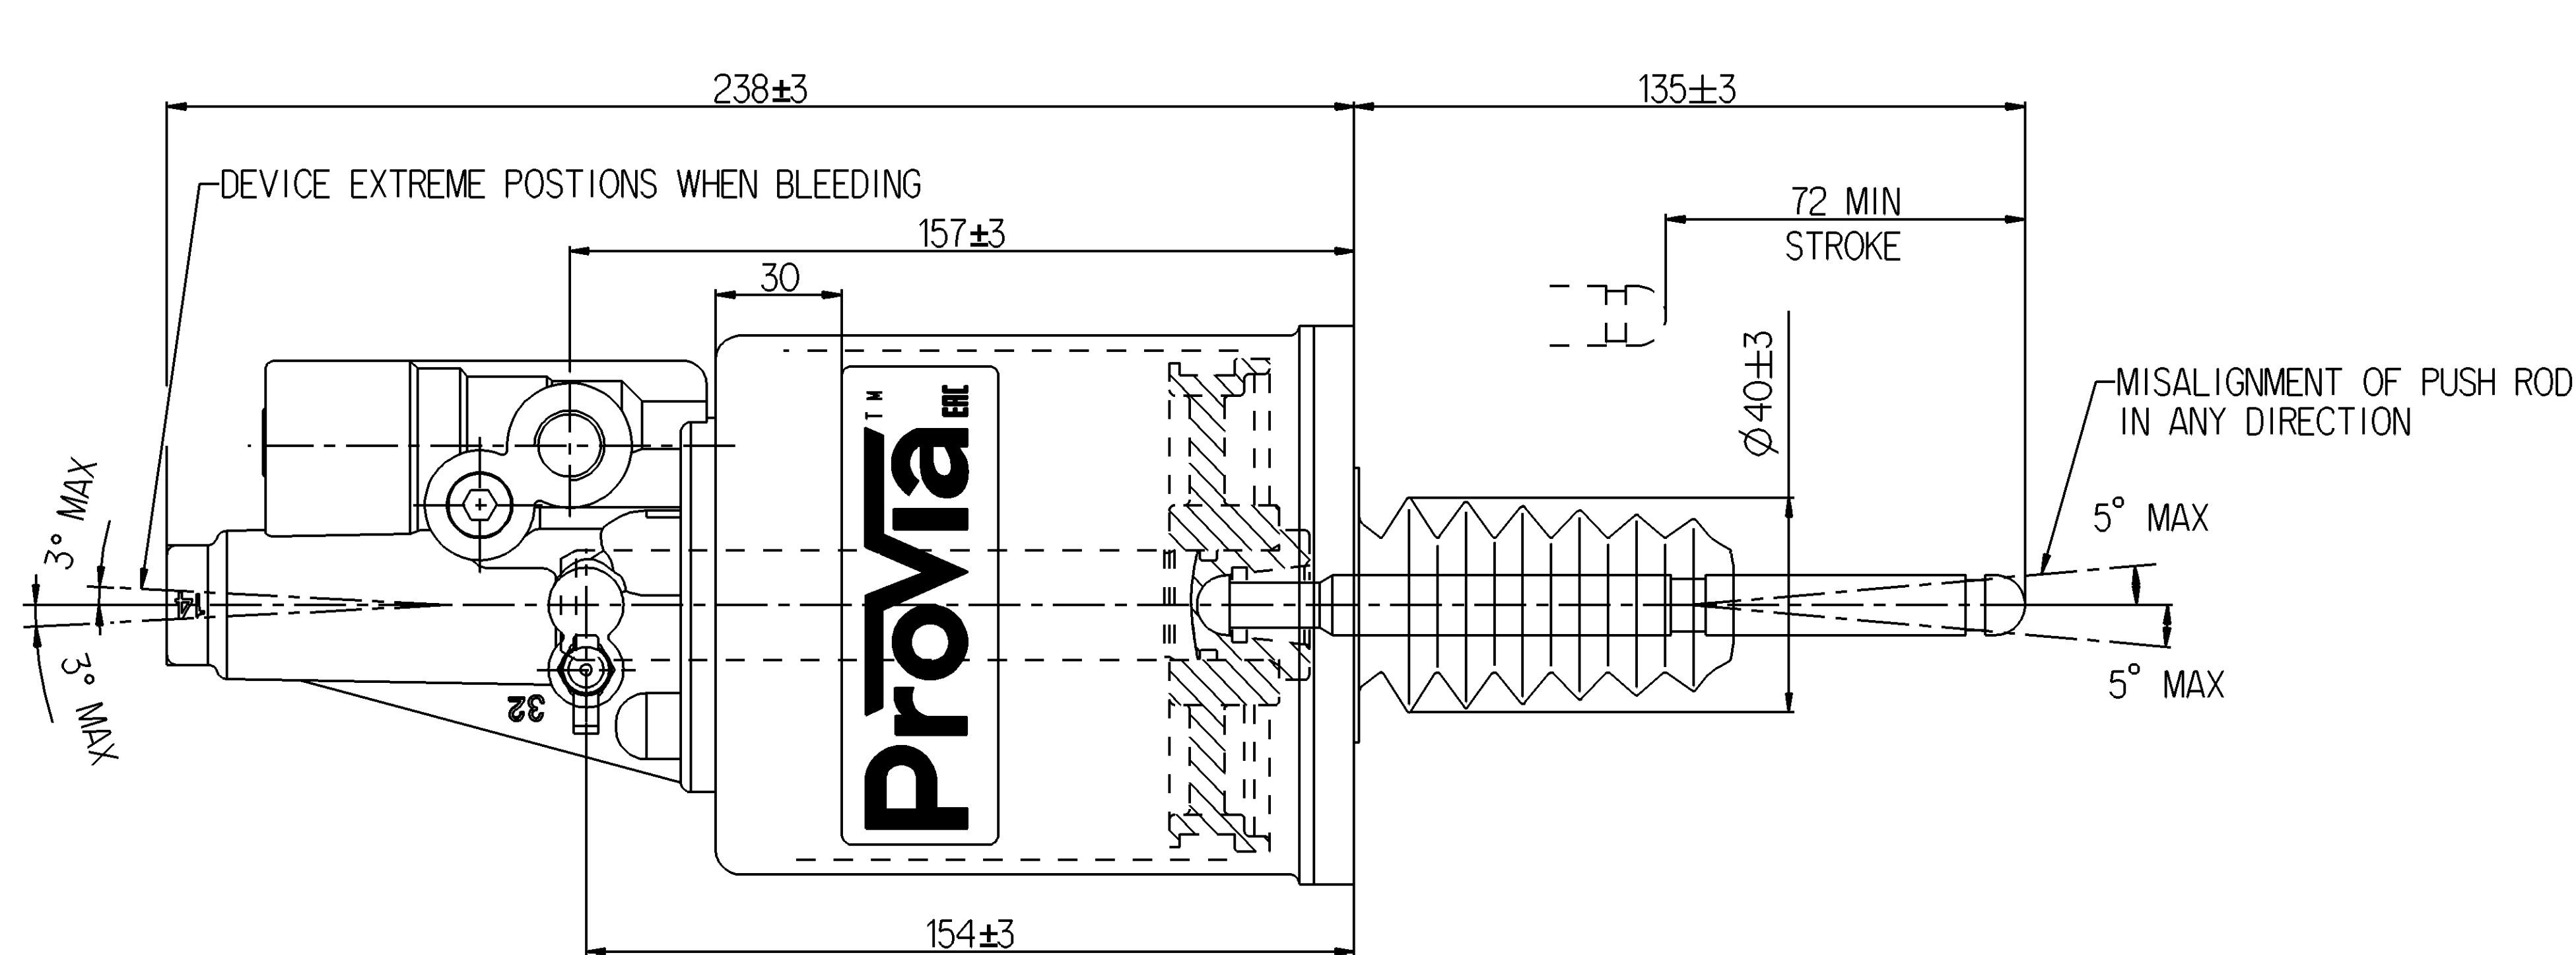


MARKING OF PORTS
11-AIR INLET
14-OIL INLET
31-AIR EXHAUST
32-BLEED SCREW

NOTES

1. HYDRAULIC TANK DIA. : $\varnothing 22\text{mm}$
2. AIR TANK DIA. : $\varnothing 102\text{mm}$
3. HYDRAULIC WORKING PRESSURE : 4MPa
4. HYDRAULIC WORKING PRESSURE MAX : 12MPa
5. AIR WORKING PRESSURE MAX : 1MPa
6. WORKING TEMPERATURE : $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$
7. WORKING MEDIUM : BRAKE OIL , AIR

1 TORQUE : 25 Nm MAX

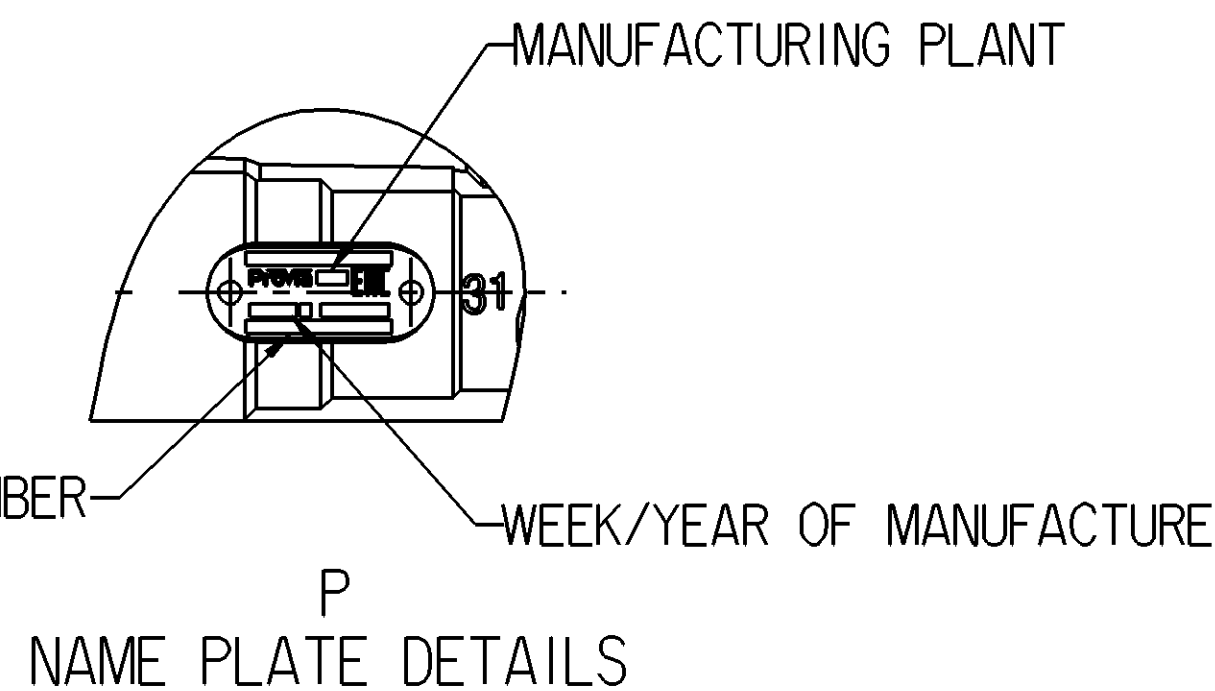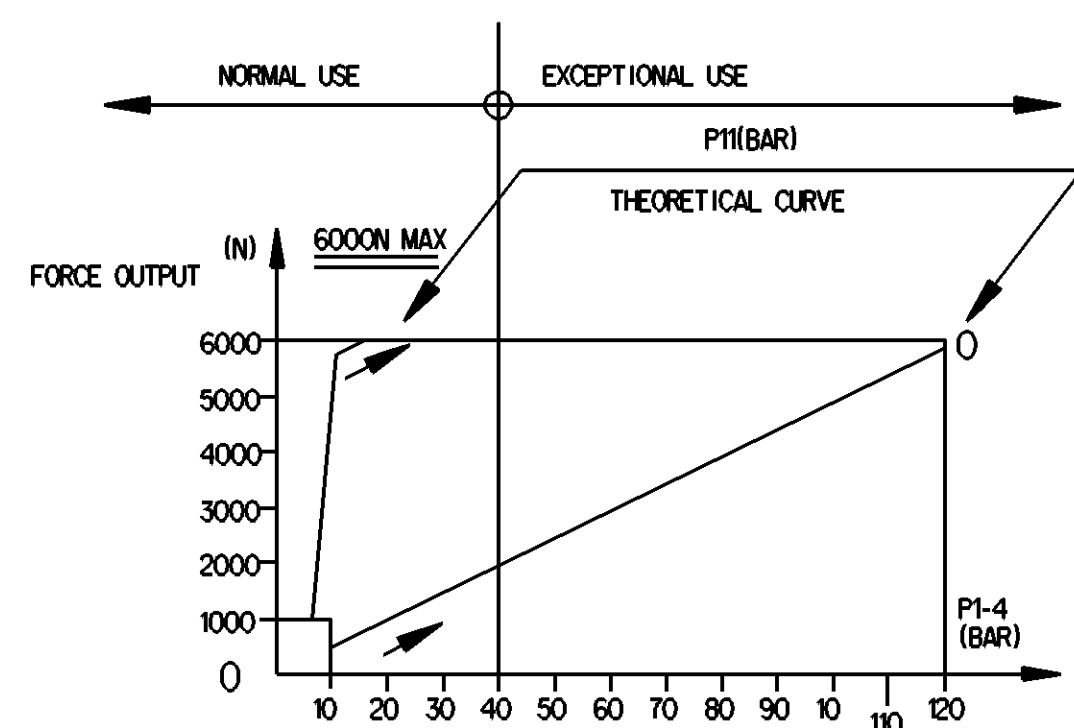

General Specification: JED-334-1, Size ISO 14405 LP					Copyright WABCO®		ProVia CLUTCH SERVO										
Further Technical Data: PRO 411 000 O					Date	Signature											
Doc. Code: 043					Drawn 2019-04-30 Sharmangum S												
Sheet: 1 To 5					Checked 2019-05-10 Yarachachelvon												
General Tolerances JED-261					Expert Thomas Bilsing												
Range of Nominal Dimensions (± mm)																	
Class 1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	±3°	Mass		Scale		Material No.		Date of first issue:					
Fine	0.5	1.0	1.5	2.0		2.3 kg		NTS		PRO 411 003 O		Doc. Code	Language	Sheet			
Medium	1.0	2.0	3.0	4.0		Size		CAD System				005	EN	1/1			
Coarse	2.0	3.5	5.0	6.5		A 1		CREO				ECH-No.		Revision	Techn. Resp.	Replacement for	
Tapped Holes acc. -												5630_Asm					
1) Tolerance Class Applied Crossmarked																	