

THE VALVE CORRESPONDS TO THE REGULATIONS FOR ELECTROMAGNETIC DEVICES ACCORDING TO VDE 0580
DAS GERÄT ENTSPRICHT DEN BESTIMMUNGEN FÜR ELEKTROMAGNETISCHE GERÄTE NACH VDE 0580
LA VALVE CORRESPOND AUX CONDITIONS POUR DES APPAREILS ELECTROMAGNETIQUES SUIVANT VDE 0580
LA VALVOLA CORRISPONDE ALLE CONDIZIONI PER APPARECCHI ELEKROMAGNETICHI DECONDO VDE 0580

- 2.2 SHORT TERM RESISTANCE TO HEAT :
KURZZEITIGE WAERMEBESTAENDIGKEIT : MAX. 1h AT 110°C
RESISTANCE THERMIQUE TEMPORAIRE :
RESISTANZA TERMICA PER BREVE PERIODO:

- 3.2 MAX. DYNAMIC PRESSURE (DELIVERY) ;
 MAX. DYNAMISCHER DRUCK (ARBEITSLEITUNG: $p_e = 20 \text{ bar}$
 PRESSION DYNAMIQUE MAXI. (UTILISATION) ;
 PRESSIONE DINAMICA MAX. (MANDATA) ;

- 4.2 PORT 3,11,21 :
ANSCHLUSS 3,11,21: 75 mm² (= Ø9.8mm)
ORIFICE 3,11,21 :
ORIFIZIO 3,11,21 :

- 5 TYPE OF CURRENT : DIRECT CURRENT
STROMART : GLEICHSTROM
NATURE DU COURANT : COURANT CONTINU
NATURA DELLA CORRENTE: CORRENTE CONTINUA

- 7 OPERATING VOLTAGE :
BETRIEBSSPANNUNG : 24V ^{+6V}_{-4.4V}
TENSION DE SERVICE :
TENSIONE DI SERVIZIO:








- 9 SERVICE CONDITION : 100% ED
BETRIEBSART : (-40°C...+60°C)
CONDITION DU SERVICE : 50% ED/5min.
CONDIZIONE DI SERVIZIO: (+60°C...+80°C)

- 10 SECURITY AGAINST THE CONFUSING OF POLES: EXISTING
VERPOLSICHERHEIT : VORHANDEN
DISPOSITIF DE TROMPEUR DE POLES : EXISTANT
SICUREZZA CONTRO L'INVERSIONE DEI POLI : ESISTENTE

- 12 DEGREE OF PROTECTION ACCORDING TO DIN 40050:
SCHUTZART NACH DIN 40050 : IP 6K9K
DEGRE DE PROTECTION SUIVANT DIN 40050 :
GRADO DI PROTEZIONE SECONDO DIN 40050 :

- 13 PROTECTION CLASS :
SCHUTZKLASSE : III
CLASSE DE PROTECTION:
CLASSE DI PROTEZIONE:

-
- Technical drawing of the front view of a 3-cylinder engine block. The drawing shows three cylinders with valves on top, a cooling fan on the left, and a timing belt cover on the right. Leader lines point to various components.

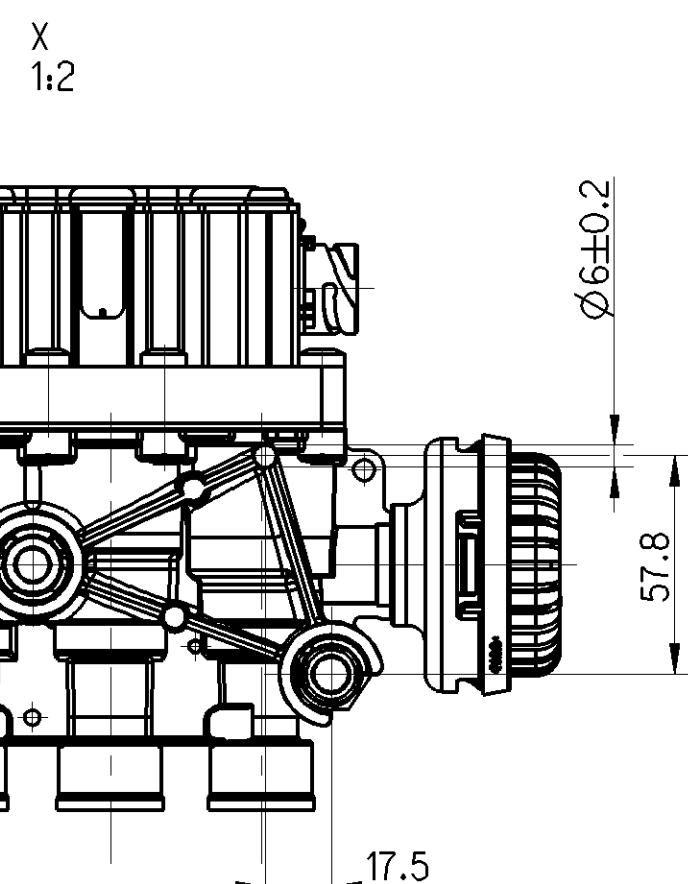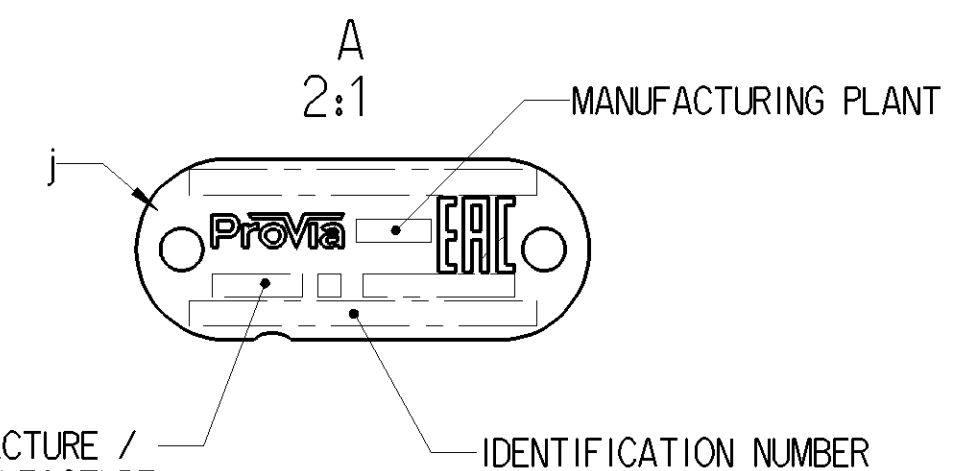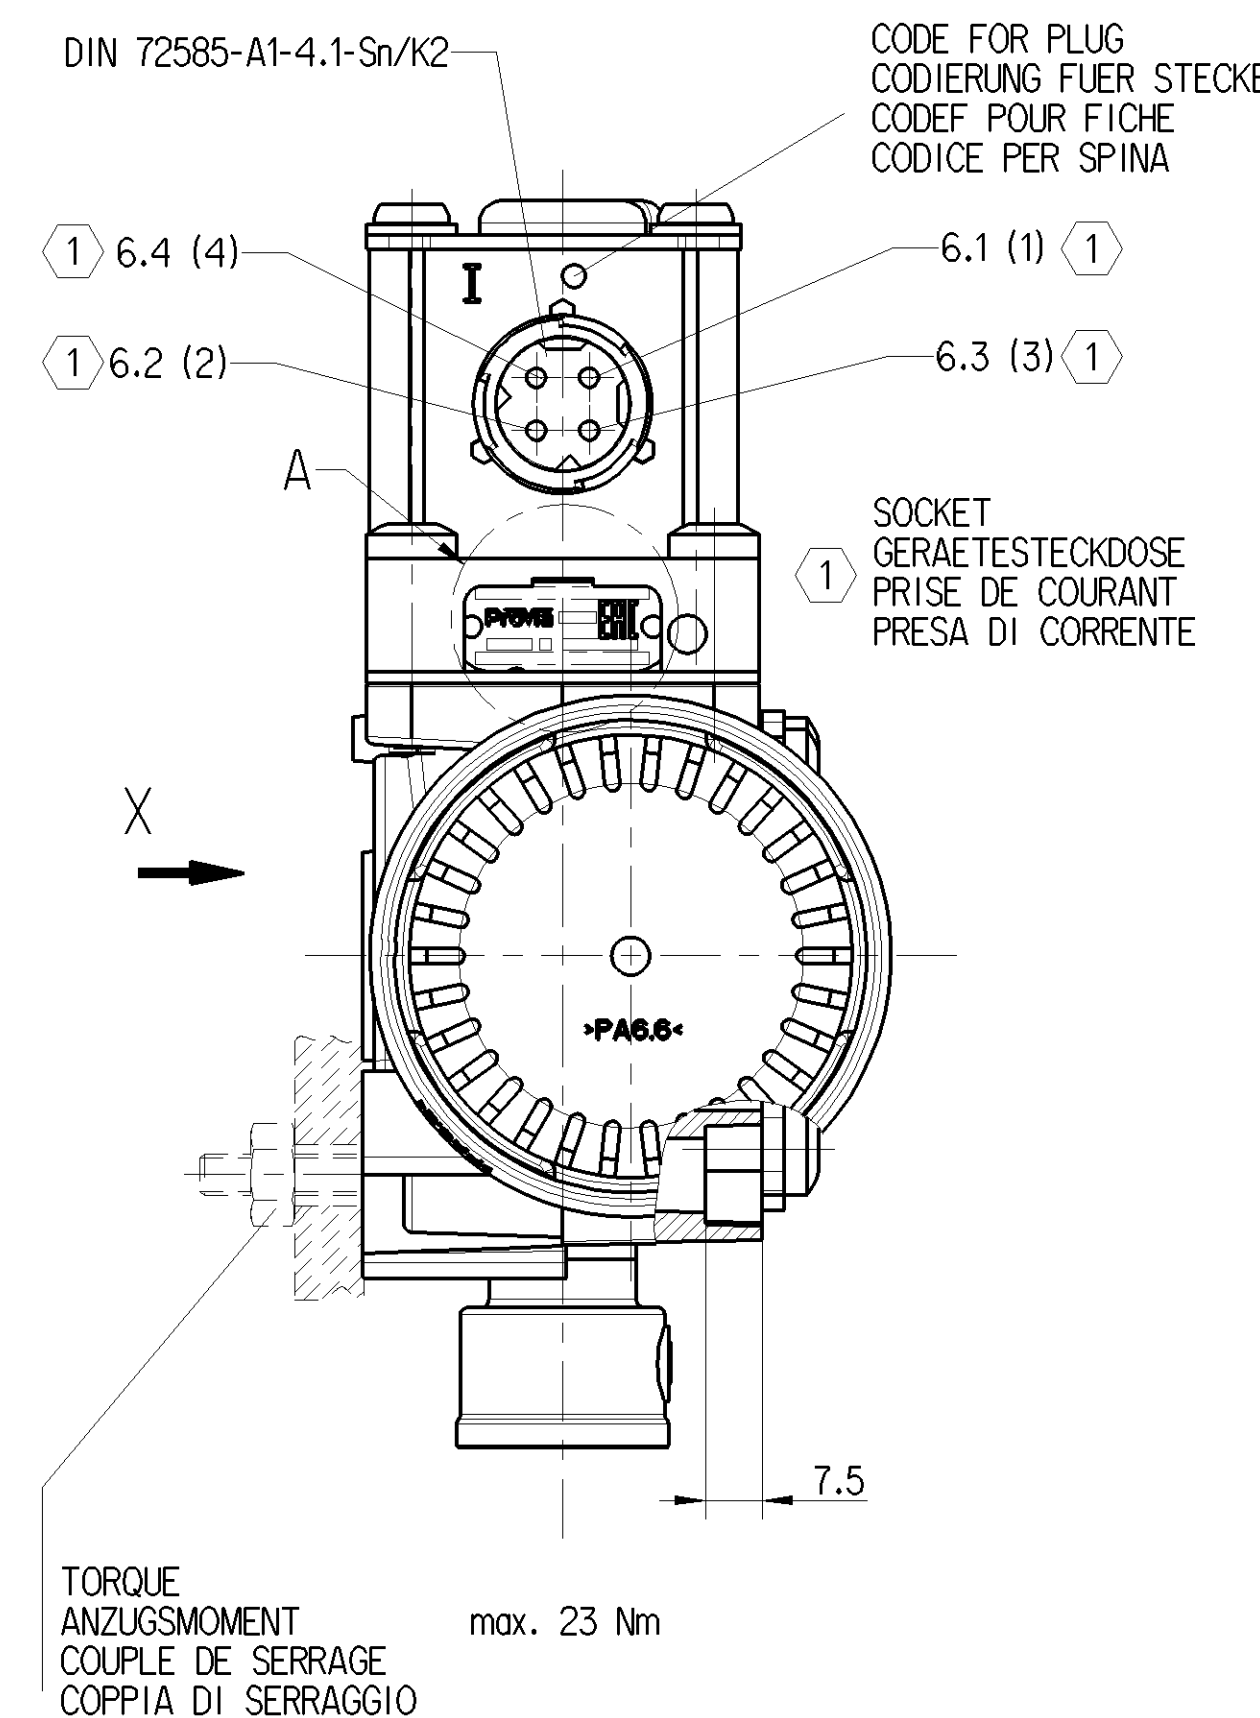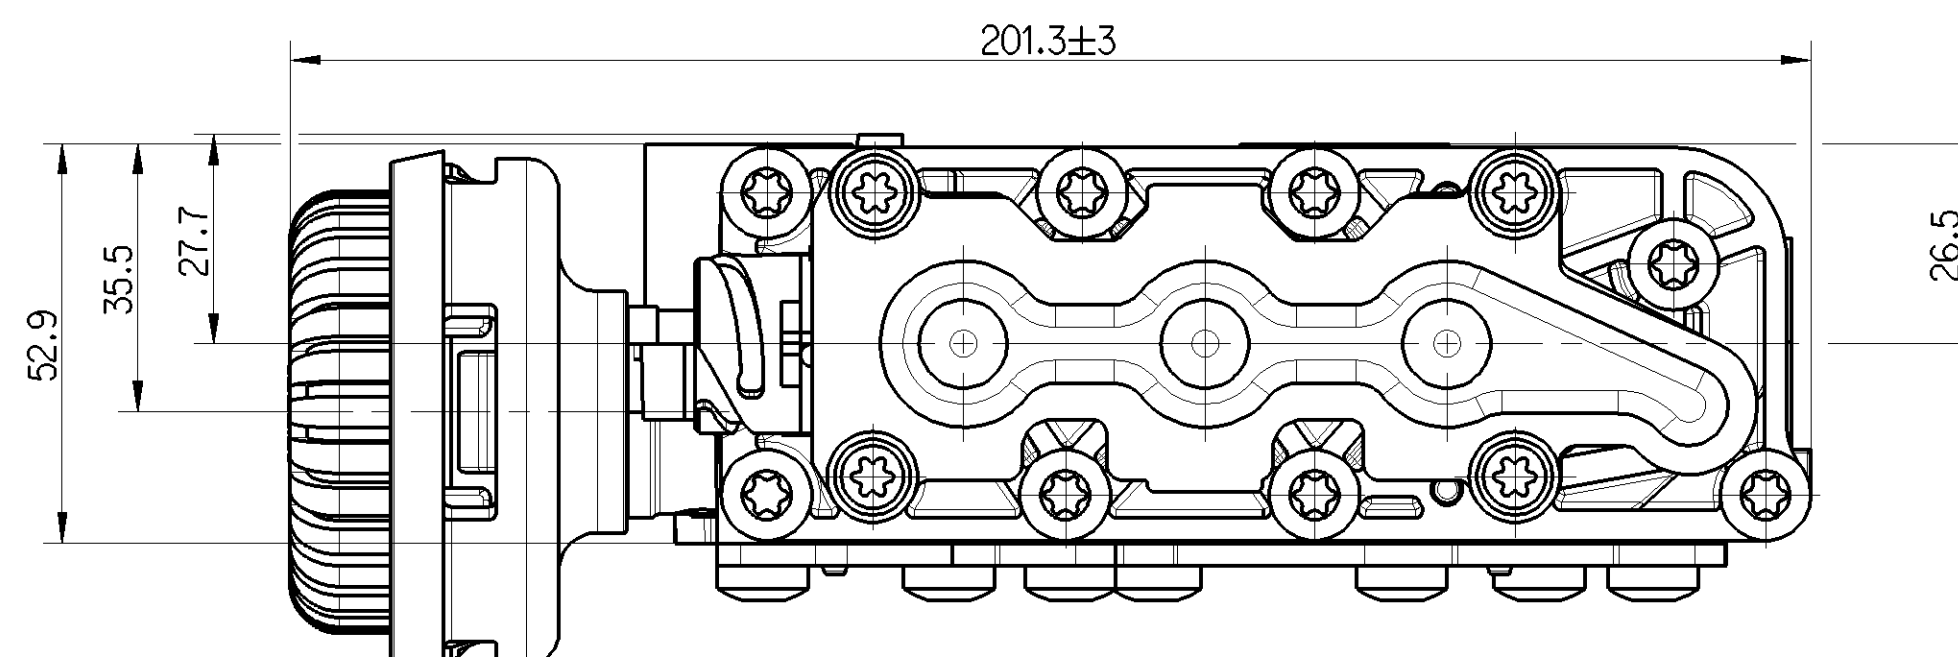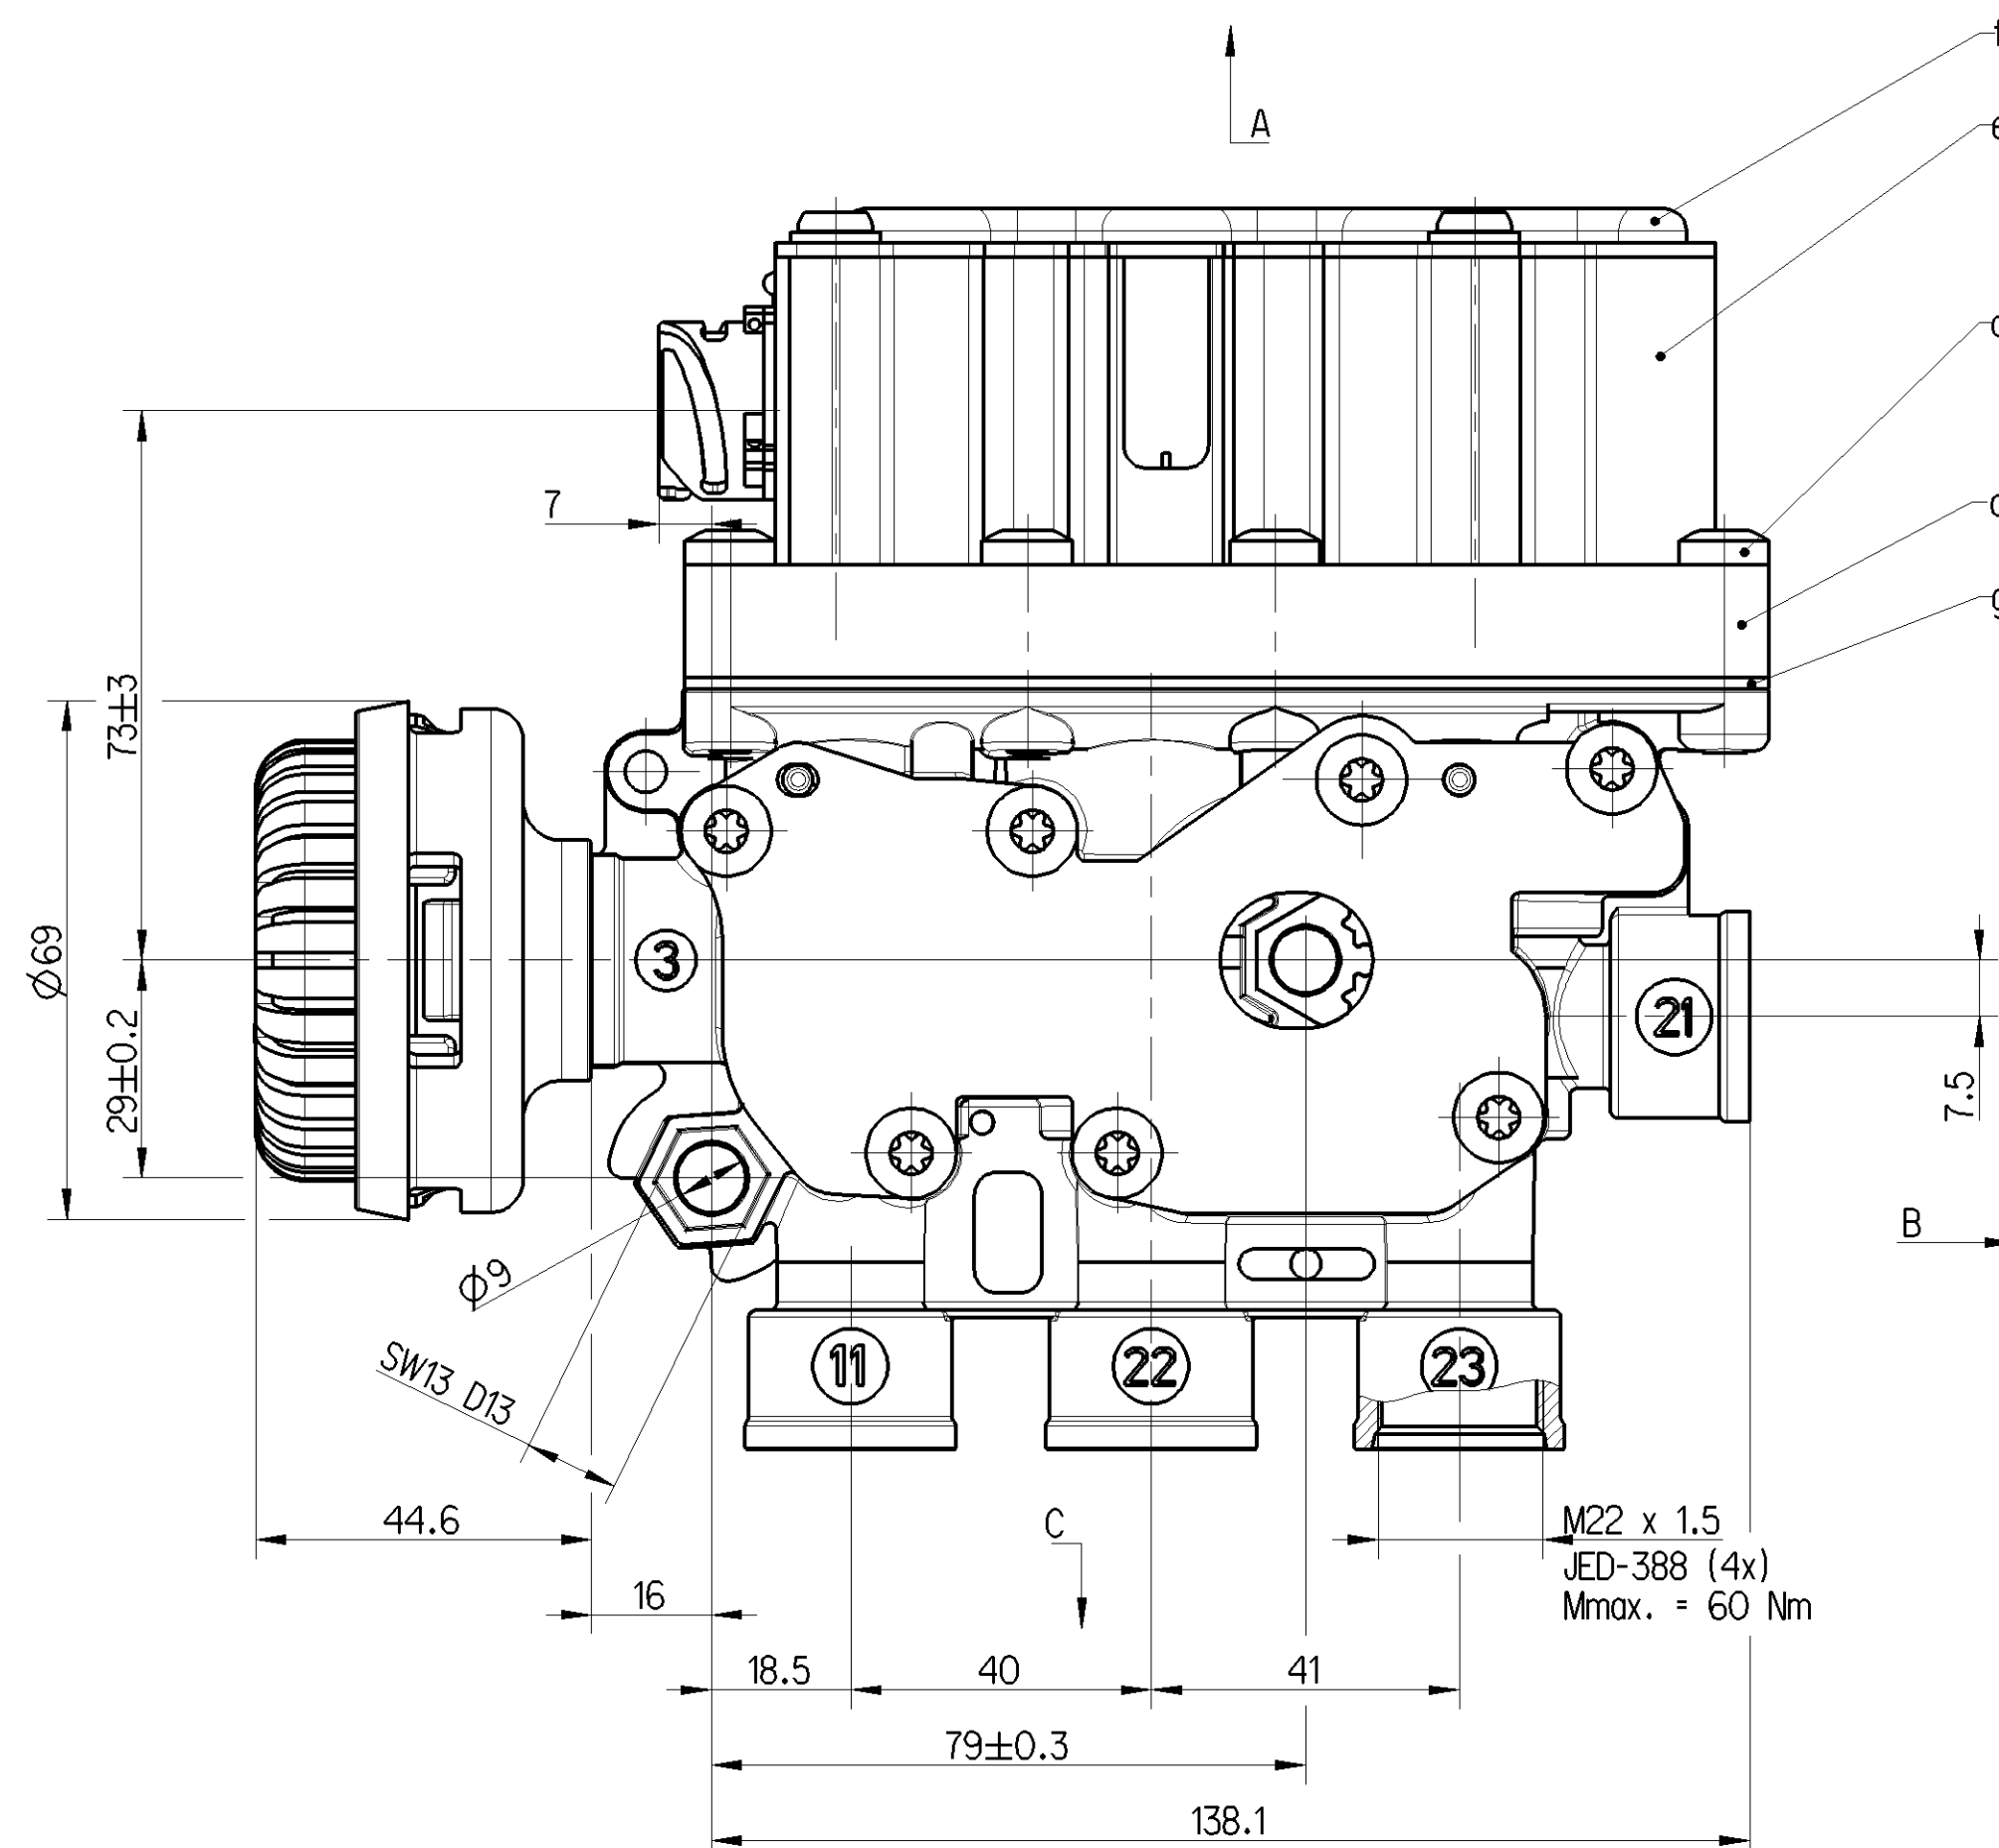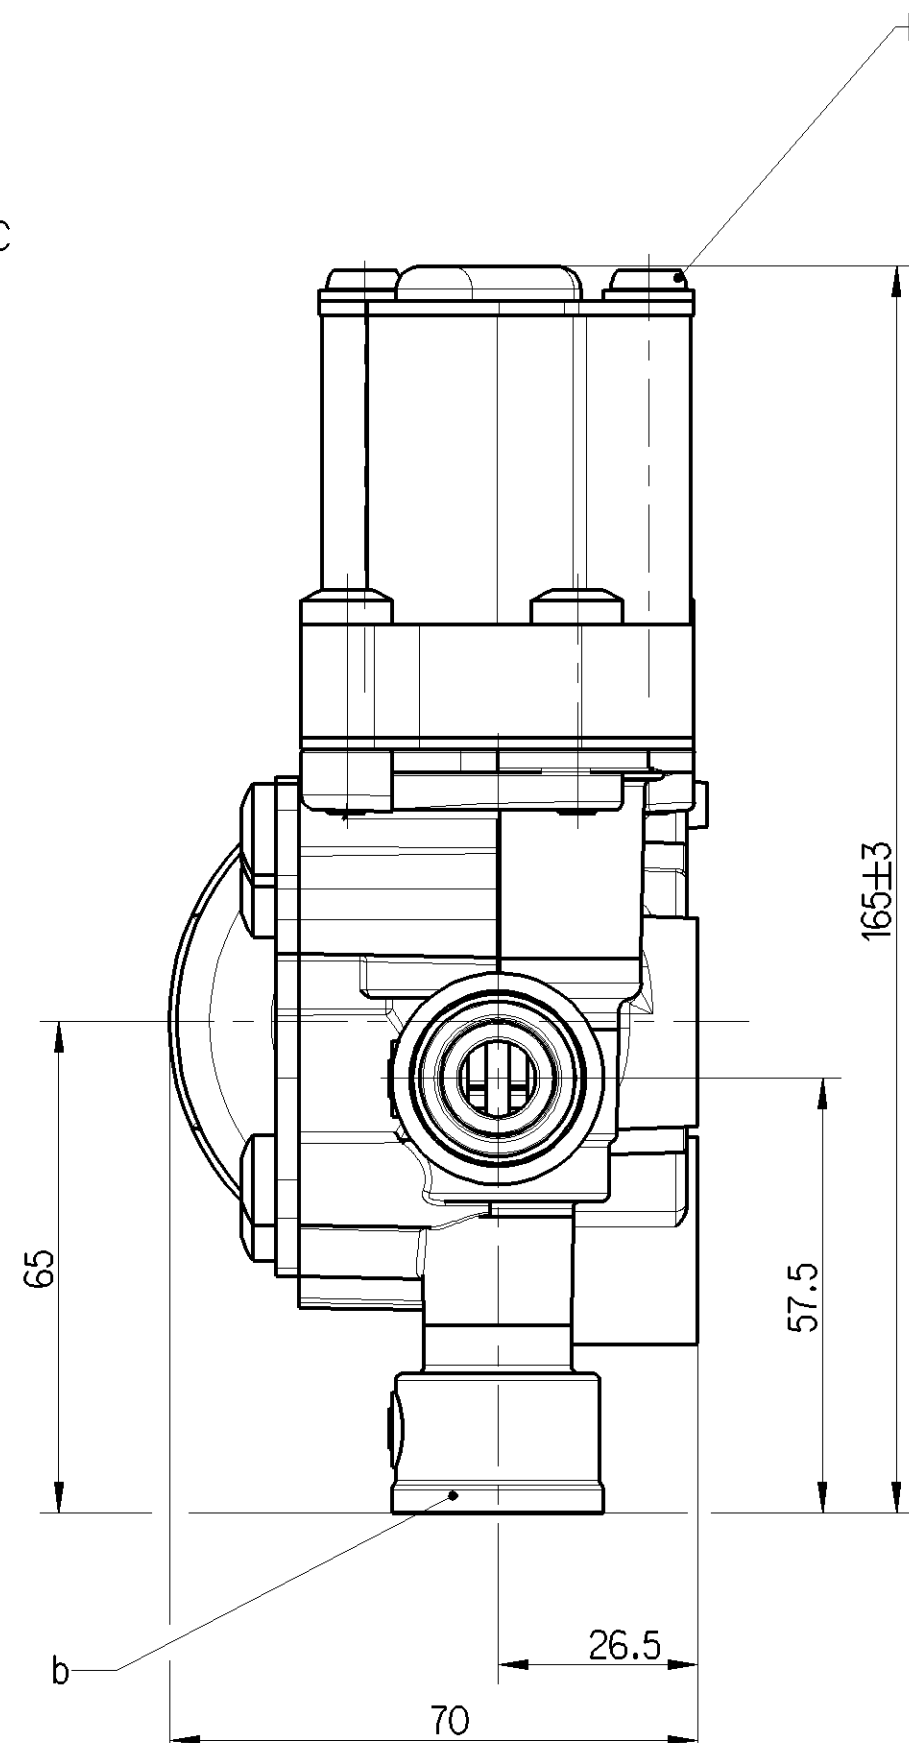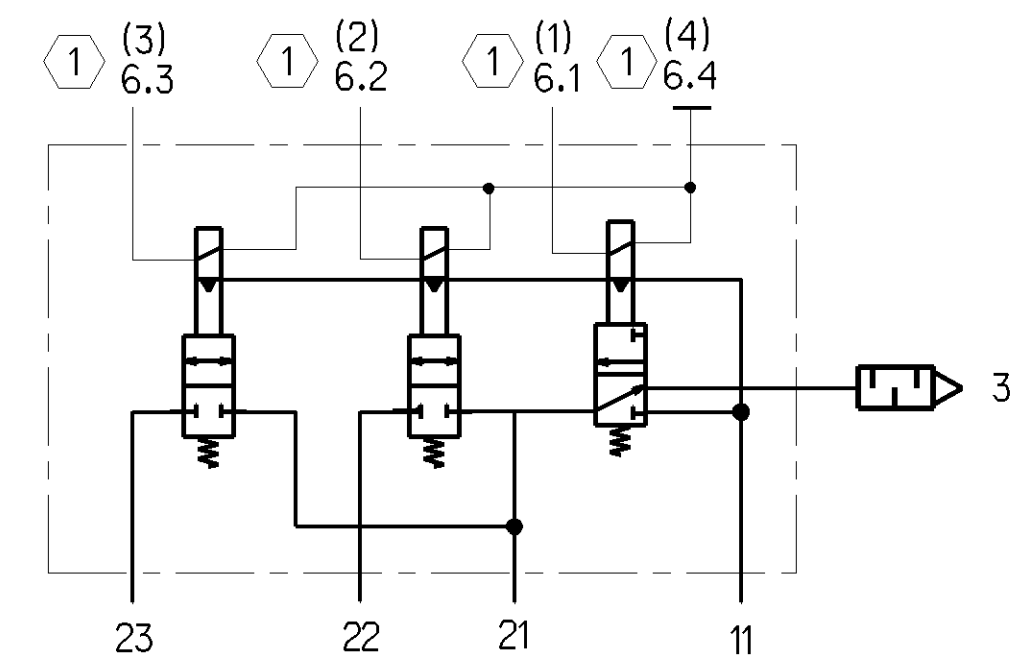

General Specification: JED-334-1, Size ISO 14405 LP										Copyright WABCO®		ProVia SOLENOID VALVE MAGNETVENTIL ELECTRO-VALVE ELETTROVALVOLA									
Further Technical Data: Product Specification										Date						Signature					
Doc. Code		Q35		Sheet		To		2018-10-24		Cebulo											
General Tolerances JED-261										Checked						Powlowski					
Range of Nominal Dimensions (± mm)										Exempt		Powlowski									
Class 1)		≤ 50	≤ 180	> 180	> 400	▽		Mass		Scale		Material No.		Date of first issue: 2018-03-16							
Fine		0,5	1,0	1,5	2,0	±3°		2.45 kg		1:1 (1:2,2:1)		PRO 412 000 0									
Medium		1,0	2,0	3,0	4,0			Size		CAD System											
Coarse		2,0	3,5	5,0	6,5																
Tapped Holes acc. 1)										A 1		CREO				ECH-Nav. 188953		Techn. Resp. 6670_AM		Replacement for	
1) Tolerance Class Applied Crossmarked																Revision 1x					