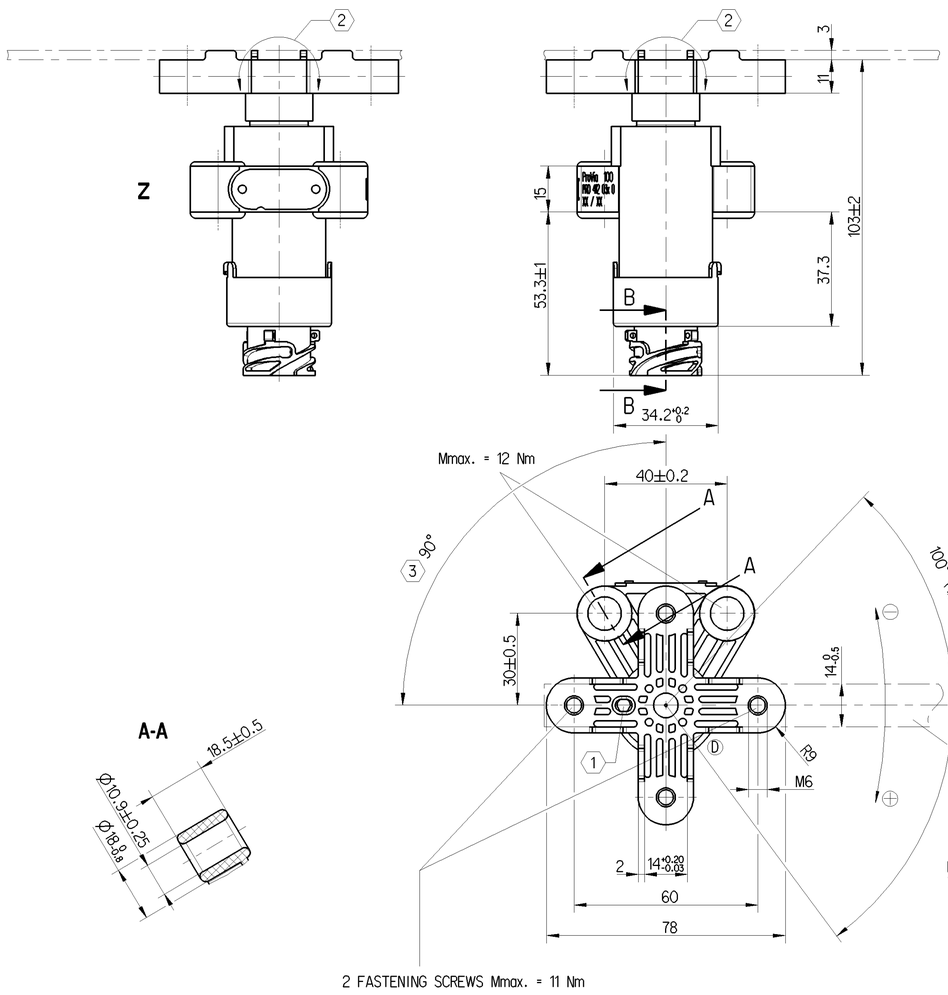

LEVER EXTENSION POSSIBLE;
THROUGH HOLES FOR BOLT M6 MAX. Ø6.9 mm

⊕ INDUCTANCE INCREASES

⊖ INDUCTANCE DECREASES

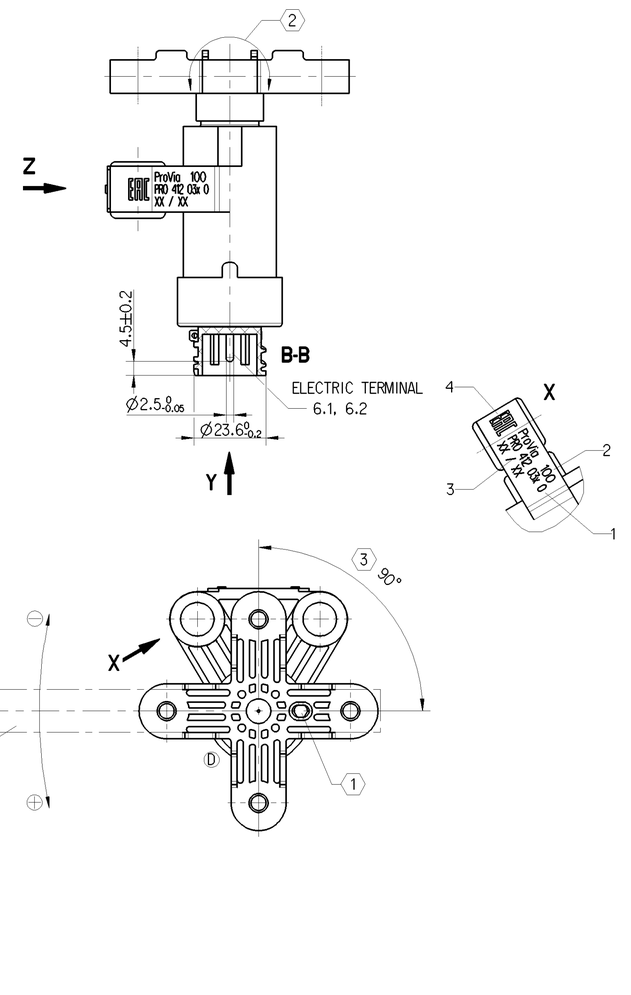

MEASURING PRINCIPLE:	INDUCTIVE
SUPPLY VOLTAGE:	PULSE 8 ... 16 V DC
CURRENT CONSUMPTION:	MAX. 90 mA
THERMAL RANGE OF APPLICATION UNDER NORMAL AMBIENT CONDITIONS:	-40°C ... +80°C
SHORT TIME HEAT RESISTANCE:	110°C FOR MAX. 1 h
AMBIENT MEDIUM:	AIR (WATER-, OIL AND DUST CONTAINING)

DISTANCE SENSOR WITHOUT TEMPERATURE COMPENSATION

CABLE BETWEEN SENSOR AND ELECTRONIC CONTROL UNIT (ECU)
LENGTH: MAX. 15 m WIRE CROSS SECTION: ≥1 mm²

TYPE OF PROTECTION ACC. TO ISO 20653
(COMPLETE DEVICE WITH INSTALLED PLUG): IP 6K9K

DISTANCE SENSOR CAN ONLY BE OPERATED IN CONNECTION WITH AN APPROPRIATE ADAPTION CIRCUIT

1) PROVIA DEVICE NUMBER
2) MANUFACTURER NUMBER
3) WEEK OF MANUFACTURE / YEAR OF MANUFACTURE
4) EAC MARK
1)-4) LASER MARKING

(1) FIXING OF THE SENSOR IN CENTRAL POSITION BY MEANS OF MANDREL Ø4h8

(2) Mmax.= 2 Nm (FOR 0.25% OF THE VIBRATIONS Mmax.= 8 Nm)

(3) RELATIVE POSITION BETWEEN SENSOR FIXING AND FLANGE

(4) OPERATING OF SENSOR IS POSSIBLE FROM FOUR SIDES, FOR THIS PURPOSE TURN LEVER

INSTALLATION SPACE



PLUG-IN CONNECTION ISO 15170 - A1-2.1-Sn/K2





NOMINAL CHARACTERISTIC CURVE FOR: T = 20°C

CHARACTERISTIC CURVE

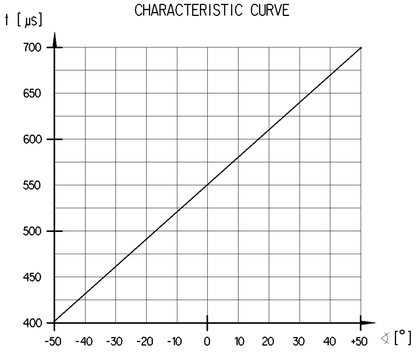

6.1
6.2 ELECTRIC TERMINAL



General Specification: JED-334-1 , Size ISO 14405 LP						
Further Technical Data: PRO412030O						
Doc. Code: 035			Sheet: 1 To 6			
General Tolerances JED-261						
		Range of Nominal Dimensions (± mm)				
Class 1)		≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400	∢
Fine		0.5	1.0	1.5	2.0	
Medium	X	1.0	2.0	3.0	4.0	±3°
Coarse		2.0	3.5	5.0	6.5	
Tapped Holes acc. -						
1) Tolerance Class Applied Crossmarked						

Copyright WABCO®

Date	Signature	ProVia	
Drawn		DISTANCE SENSOR	
2018-11-23	Kolkowski		
Checked			
2018-11-23	Marcinkiewicz		
Expert			
Kolkowski			

Mass	Scale	Material No.	Date of first issue: 2018-02-22		
0.2 KG	1:1	PRO 412 032 0	Doc.Code	Language	Sheet
			005	EN	1/1
Size	CAD System				
A 1	CREO	ECN-No. 179377 / Revision 2 x / Techn. Resp. D / Replacement for 6660_AM			

100mm

Non è permesso consegnare o fare in riproduzione questo documento, né utilizzare il contenuto o renderlo comunque noto a terzi senza espressa autorizzazione scritta. Ogni diritto derivante dal brevetto o dalla registrazione di un modello di utilità resta riservato a WABCO. Tutti i diritti, in particolare quelli di proprietà industriale riservati, nonché quelli derivanti da brevetti o modelli.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

Toute Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tous droits de propriété industrielle réservés, notamment en matière de brevets et de modèles.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design.