


<1> SAFETY CHARACTERISTICS	0
<2> SIGNIFICANT CHARACTERISTICS	0
<C1> CUSTOMER INTERFACE	2

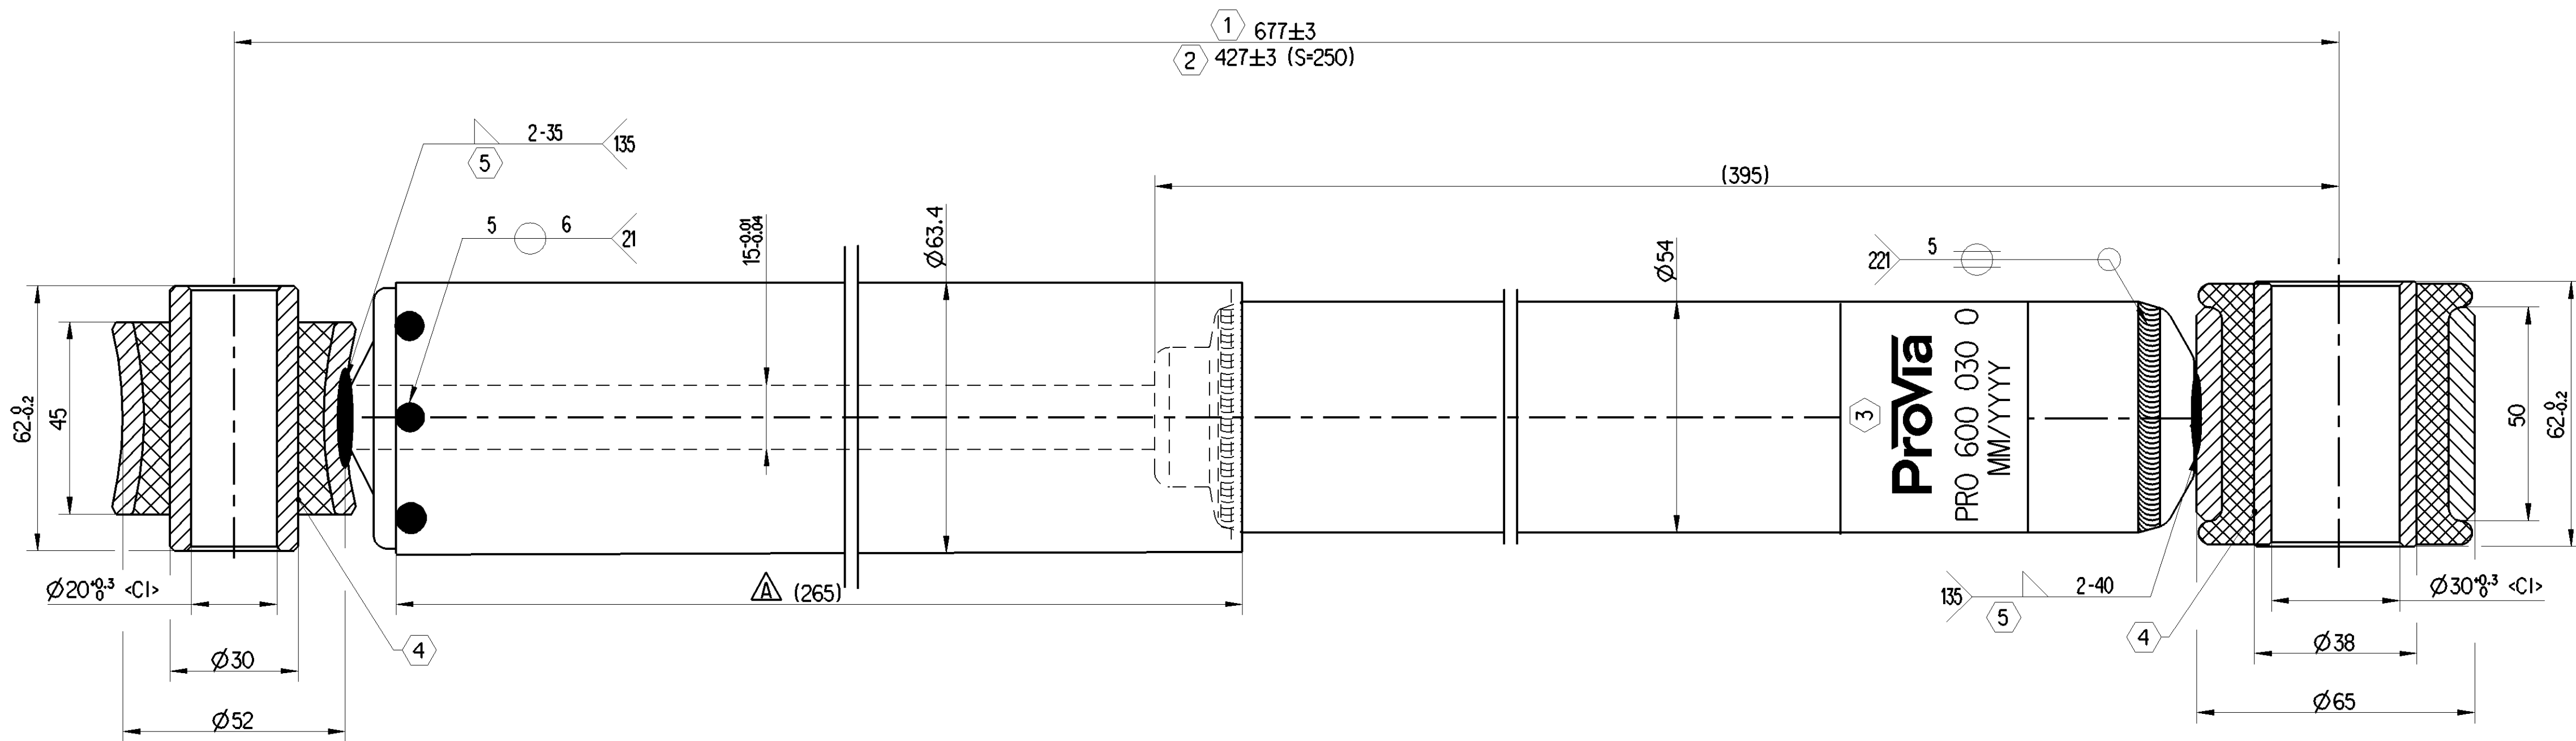

1	MAX.REBOUND LENGTH
2	MIN.COMPRESSION LENGTH
3	MARKING DETAILS PROVIA LOGO PROVIA PART NUMBER DATE OF MANUFACTURING
4	HARDNESS OF RUBBER PARTS 60-70 HS
5	WELD STRENGTH 45KN
	COLOUR: RAL 9005B SEMI-BLACK

Resistance force table of SAMPLE criterion - HYDRAULIC

V (m/s)	0.052	0.131	0.262	0.393	0.524
Rebound (N)	4105	4141/6903	6523	7301	6795/9195
Compression (N)	853	1096/1828	2158	2449	2296/3108
S (mm)	100				

General Specification: ISO 8016, ED-334-1, Size ISO 14405 LP						Copyright WABCO®				ProVia							
Further Technical Data: PRO 600 018 0						Date		Drawn		Signature		SHOCK ABSORBER					
Doc. Code: Q35		Sheet: 1		To		7		2023-02-10		Srivarman							
General Tolerances (ED-261)						checked		2023-02-14		Manivannan							
						Range of Nominal Dimensions (± mm)										Dimensions in mm	
Class 1)		≤ 50		50 > 180		180 ≤ 400		400 > 1000		±3°							
Fine		±0.5		±1		±1.5		±2									
Medium		X ±1		±2		±3		±4									
Coarse		±2		±2.5		±5		±6.5									
Tapped Holes: oos -						Mass		Scale		Material No.		Date of first issue:					
1) Tolerance Class Applied Crossmarked						5.3±1		1:1		PRO 600 030 0		Doc. Code		Language		Sheet	
						kg		Size				005		EN		1/1	
						CAD System		EON-No.				Revision		Tech. Resp.		Replacement for	
A 1 CREO								513345		1x A		696LAM					