


<1> SAFETY CHARACTERISTICS	0
<2> SIGNIFICANT CHARACTERISTICS	0
<C1> CUSTOMER INTERFACE	2

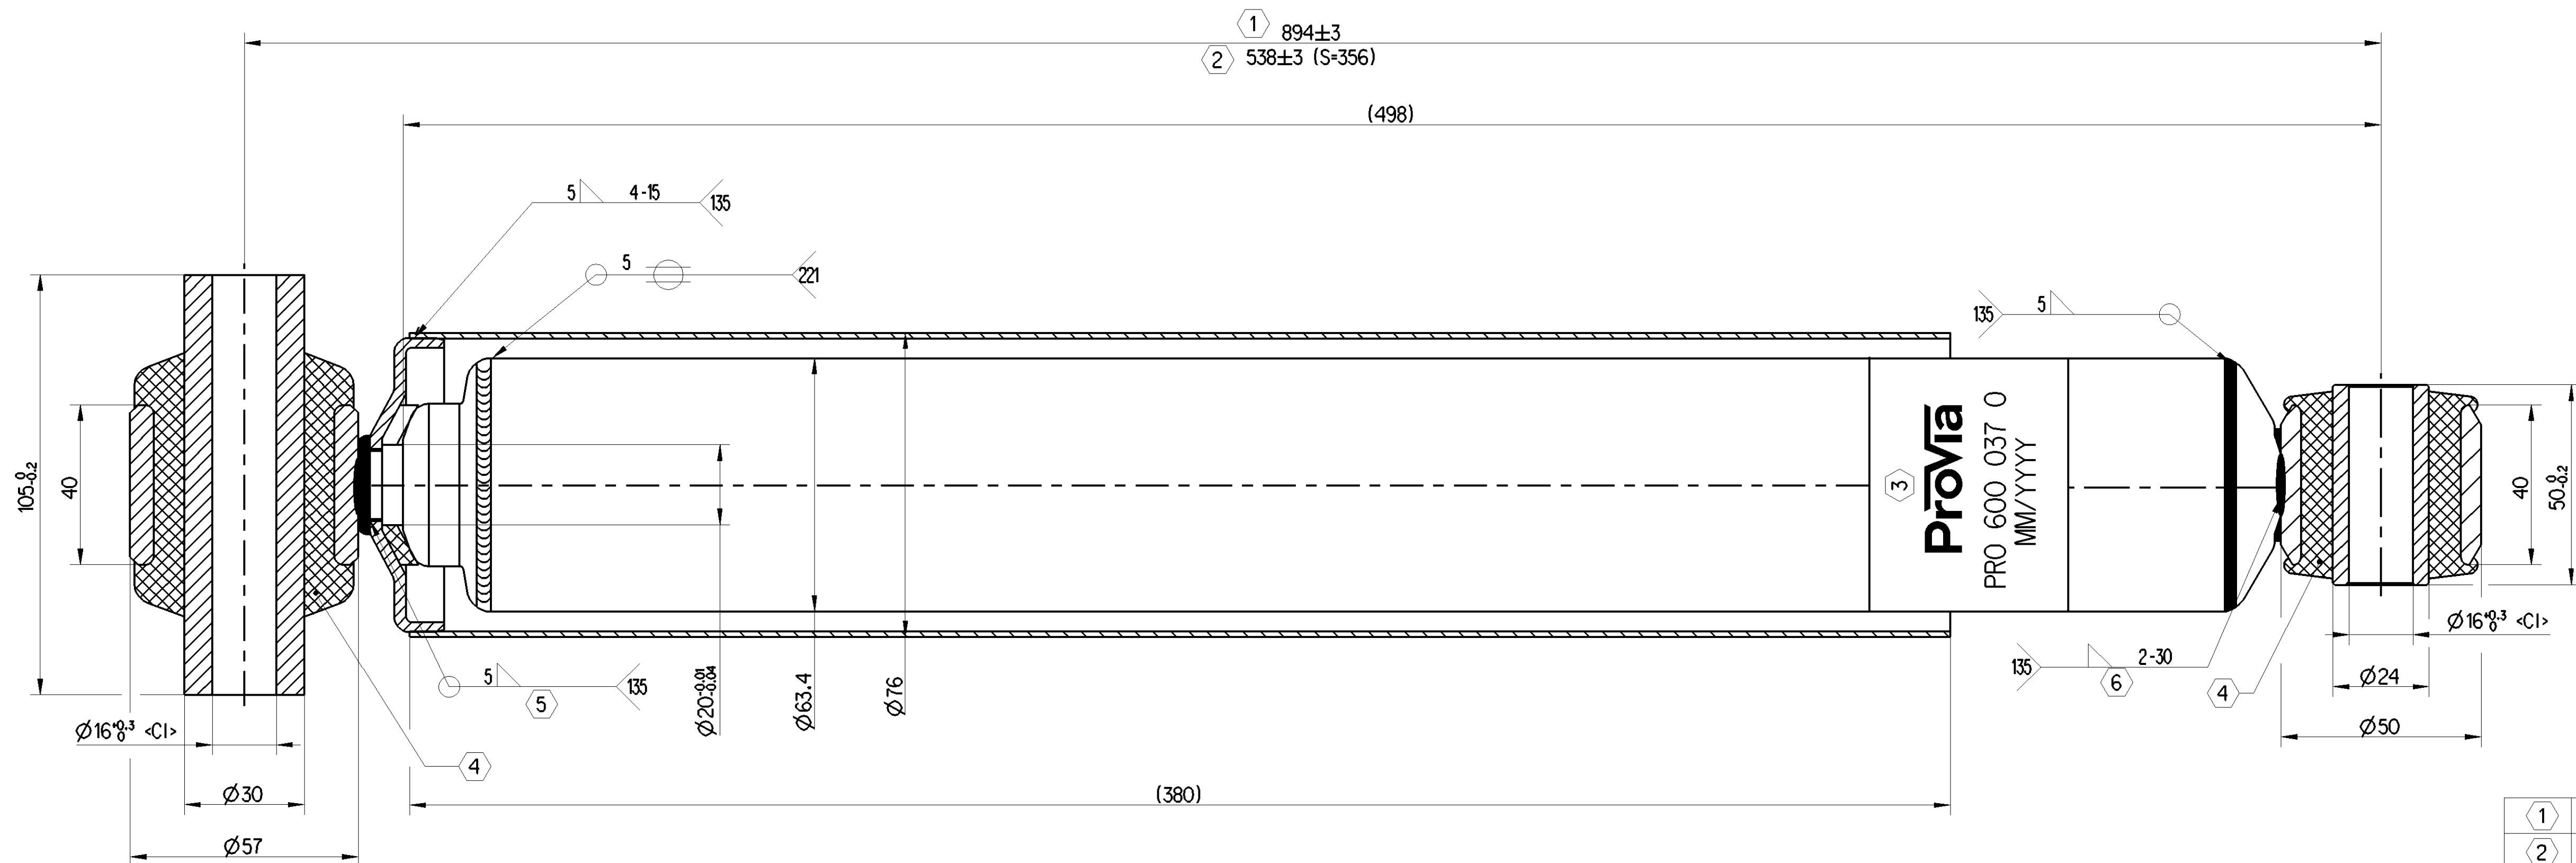

1	MAX.REBOUND LENGTH
2	MIN.COMPRESSION LENGTH
3	MARKING DETAILS PROVIA LOGO PROVIA PART NUMBER DATE OF MANUFACTURING
4	HARDNESS OF RUBBER PARTS 65-70 HS
5	WELD STRENGTH 60KN
6	WELD STRENGTH 55KN
	COLOUR: RAL 9005B SEMI-BLACK

Resistance force table of SAMPLE criterion - HYDRAULIC

V (m/s)	0.052	0.131	0.262	0.393	0.524
Rebound (N)	1628	4329/7215	6502	7002	6368/8616
Compression (N)	321	597/995	942	1062	1003/1359
S (mm)	100				

General Specification: ISO 8015, JED-33A-1, Size ISO 1440S LP						Copyright WABCO®		ProVia											
Further Technical Data: PRO 600 018 O						Date		Signature		SHOCK ABSORBER									
Doc. Code: 035 Sheet: 1 To 7						Drawn		Sargovanan											
General Tolerances JED-261						2023-01-17		Checked		Manivannan									
Range of Nominal Dimensions (± mm)						2023-01-17		Manivannan											
Class 1) ≤ 50 > 50 ≤ 180 > 180 ≤ 400 > 400						Dimensions in mm													
Fine		±0.5		±1		±1.5		±2		±3°		Mass		Scale		Material No.		Date of first issue: 2023-01-17	
Medium		X ±1		±2		±3		±4				6±1 kg		1:1		PRO 600 037 O			
Coarse		±2		±3		±5		±6.5				Size CAD System							
Tapped Holes acc.						A 1		CRO				EDN-No.		Revision		Techs. Resp.		Replacement for	
1) Tolerance Class Applied Crossmarked										-		-		-		6361.LAM			