
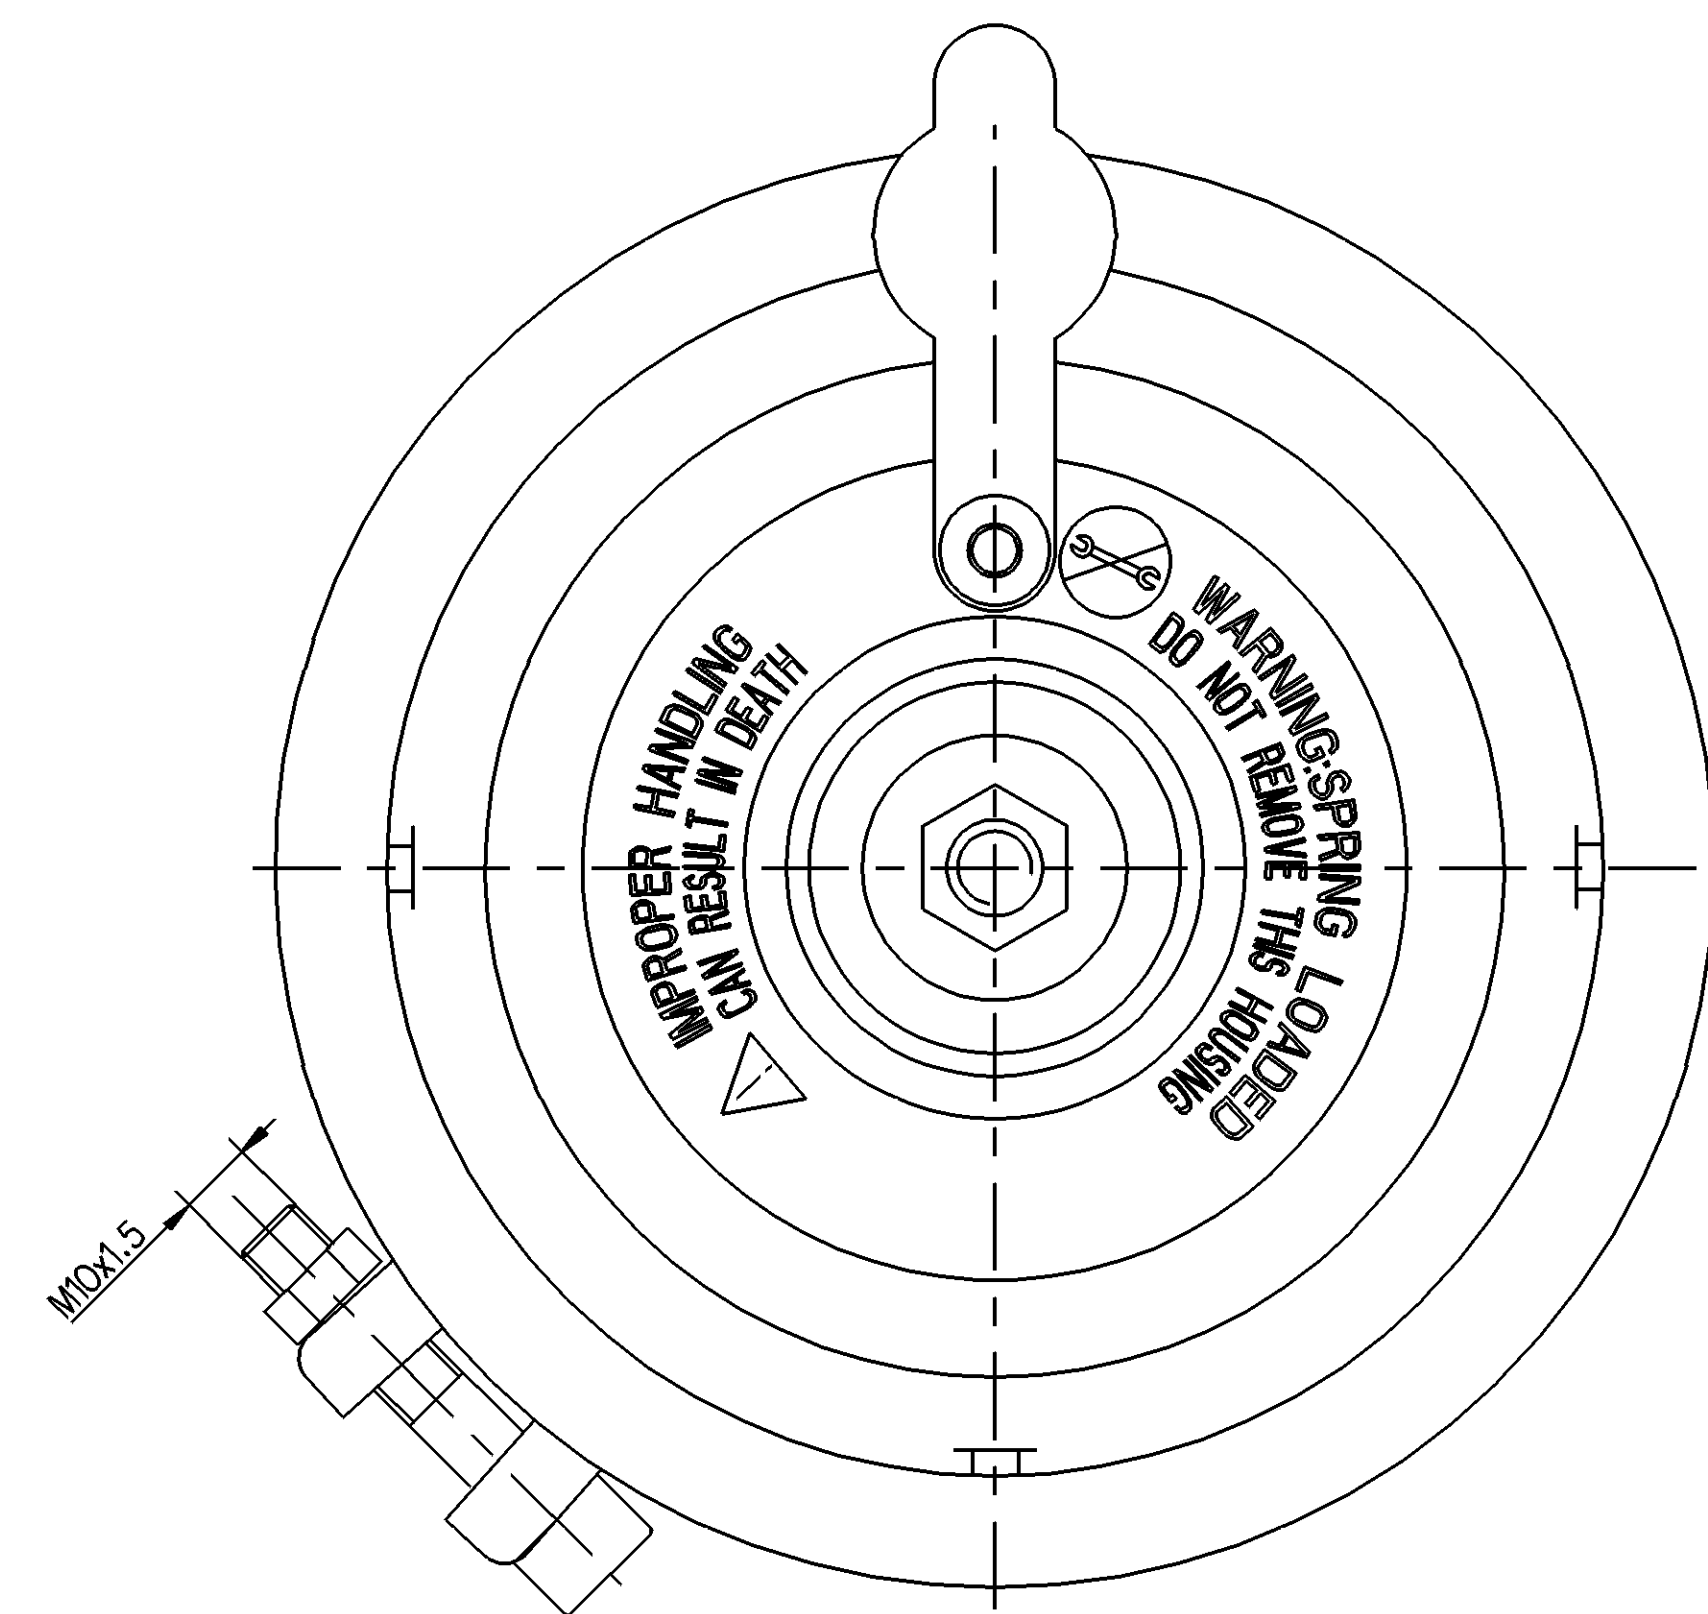


23	24
<1> SAFETY CHARACTERISTICS	0
<2> SIGNIFICANT CHARACTERISTICS	0
<C> CUSTOMER INTERFACE	4

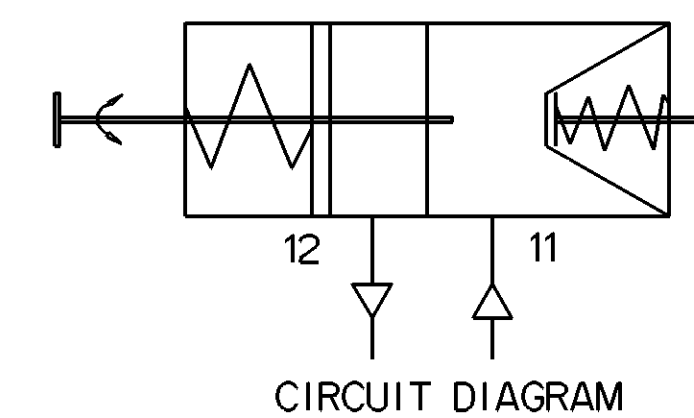

- ① OPEN BREATHER HOLE
- ② TORQUE: 34Nm MAX
- ③ TORQUE: 35-40Nm
- ④ TORQUE: 220±20 Nm
- ⑤ ADMISSIBLE INSTALLATION POSITION
- ⑥ TORQUE: MAX.25Nm
- ⑦ DEFLECTION: 6° MAX AT STROKE 0mm

[illegible]

GRAPHS FOR INFORMATION ONLY

