
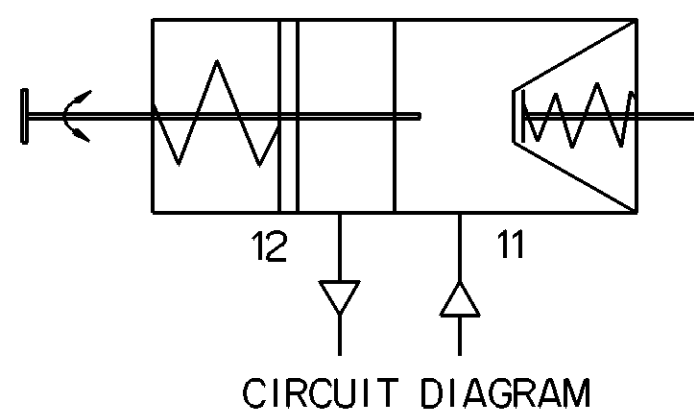
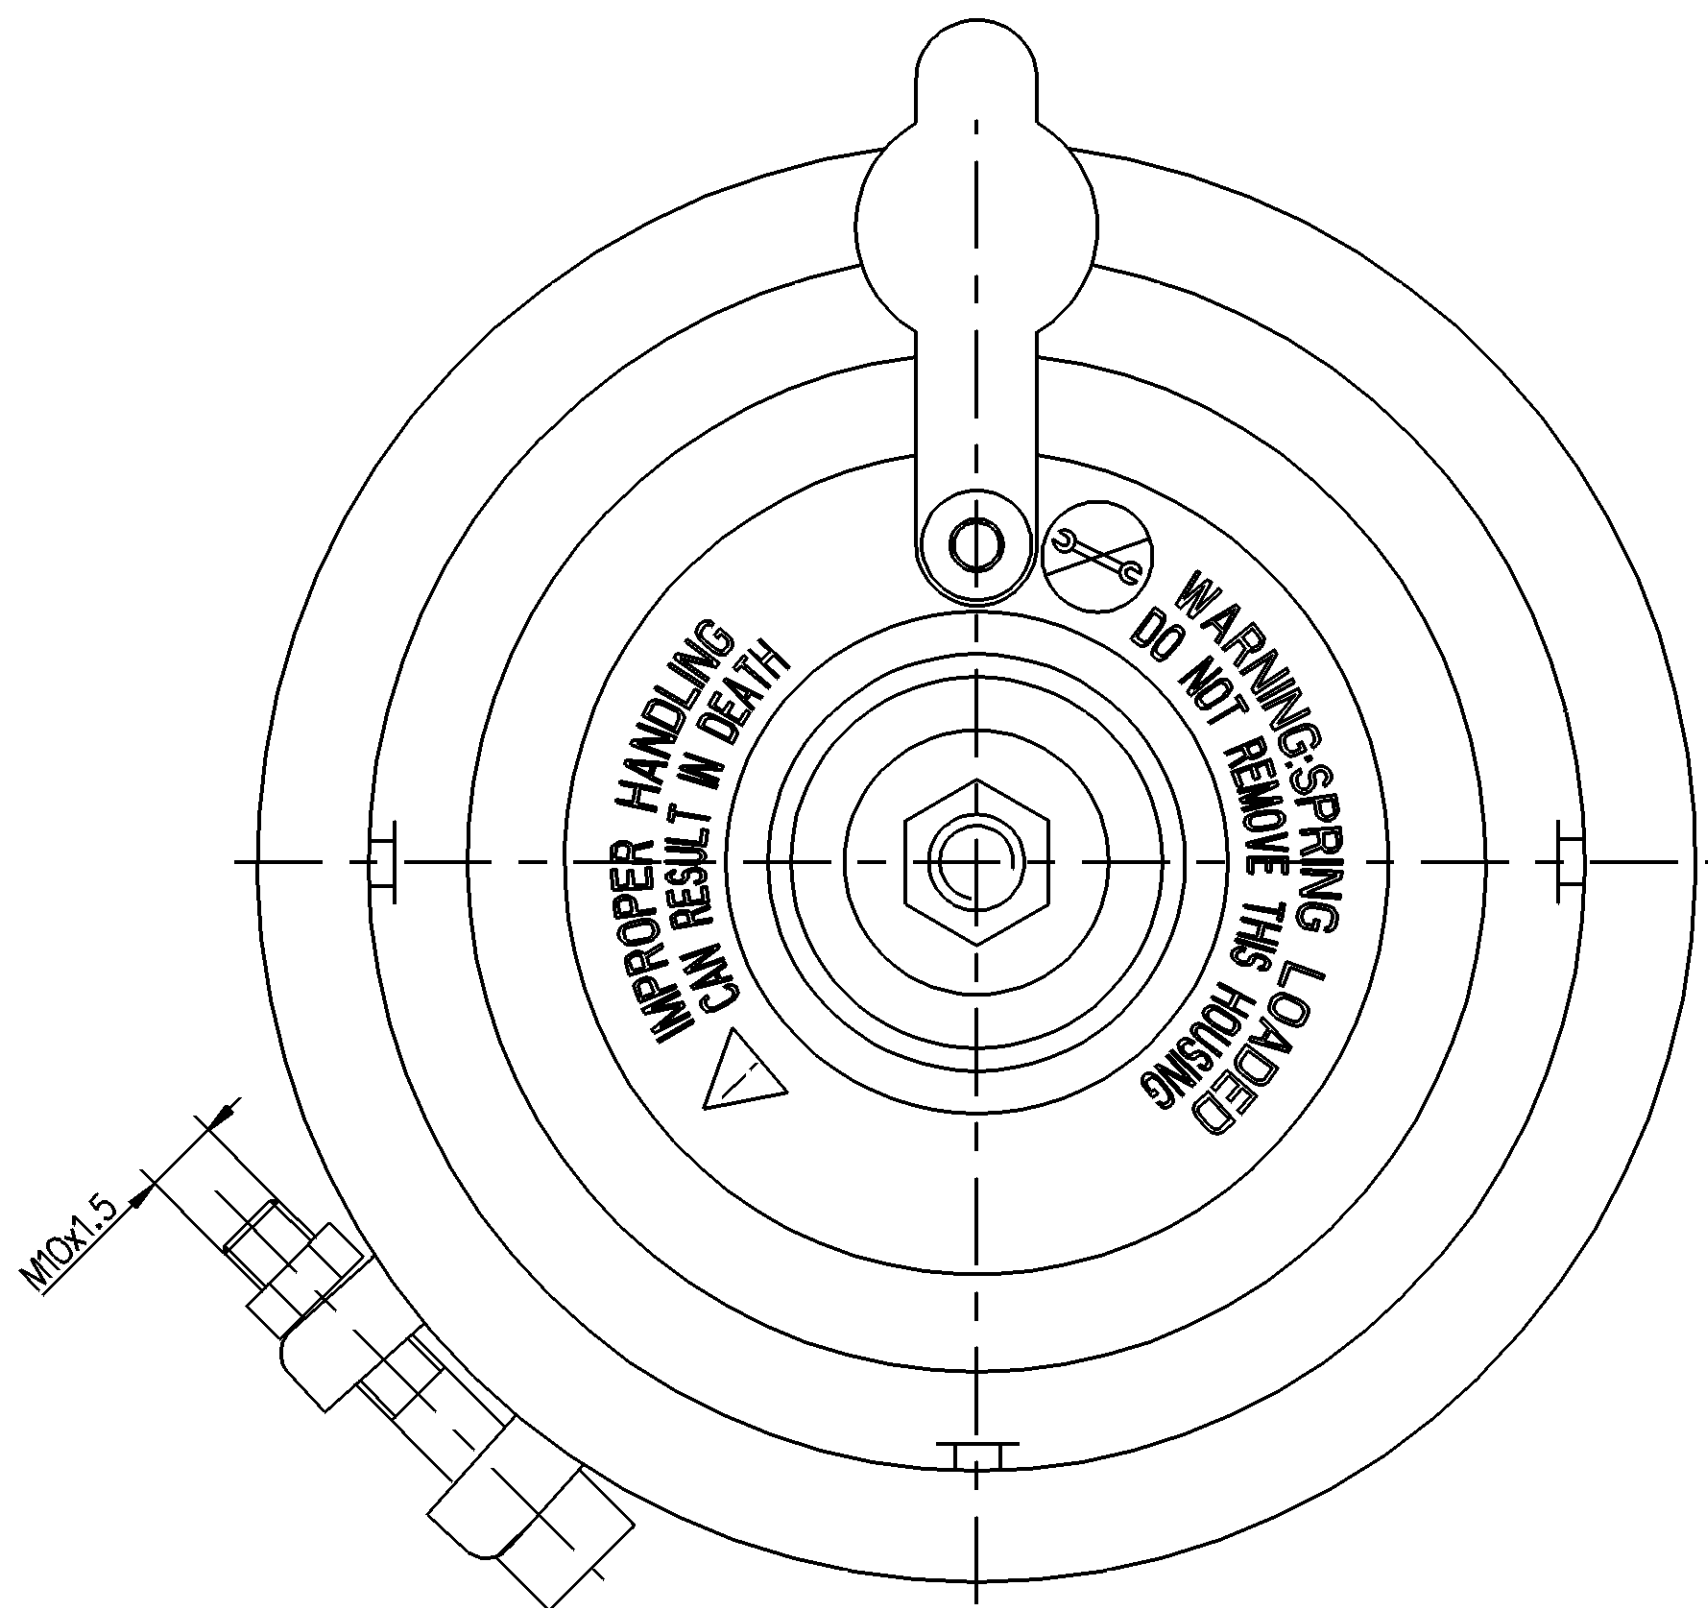
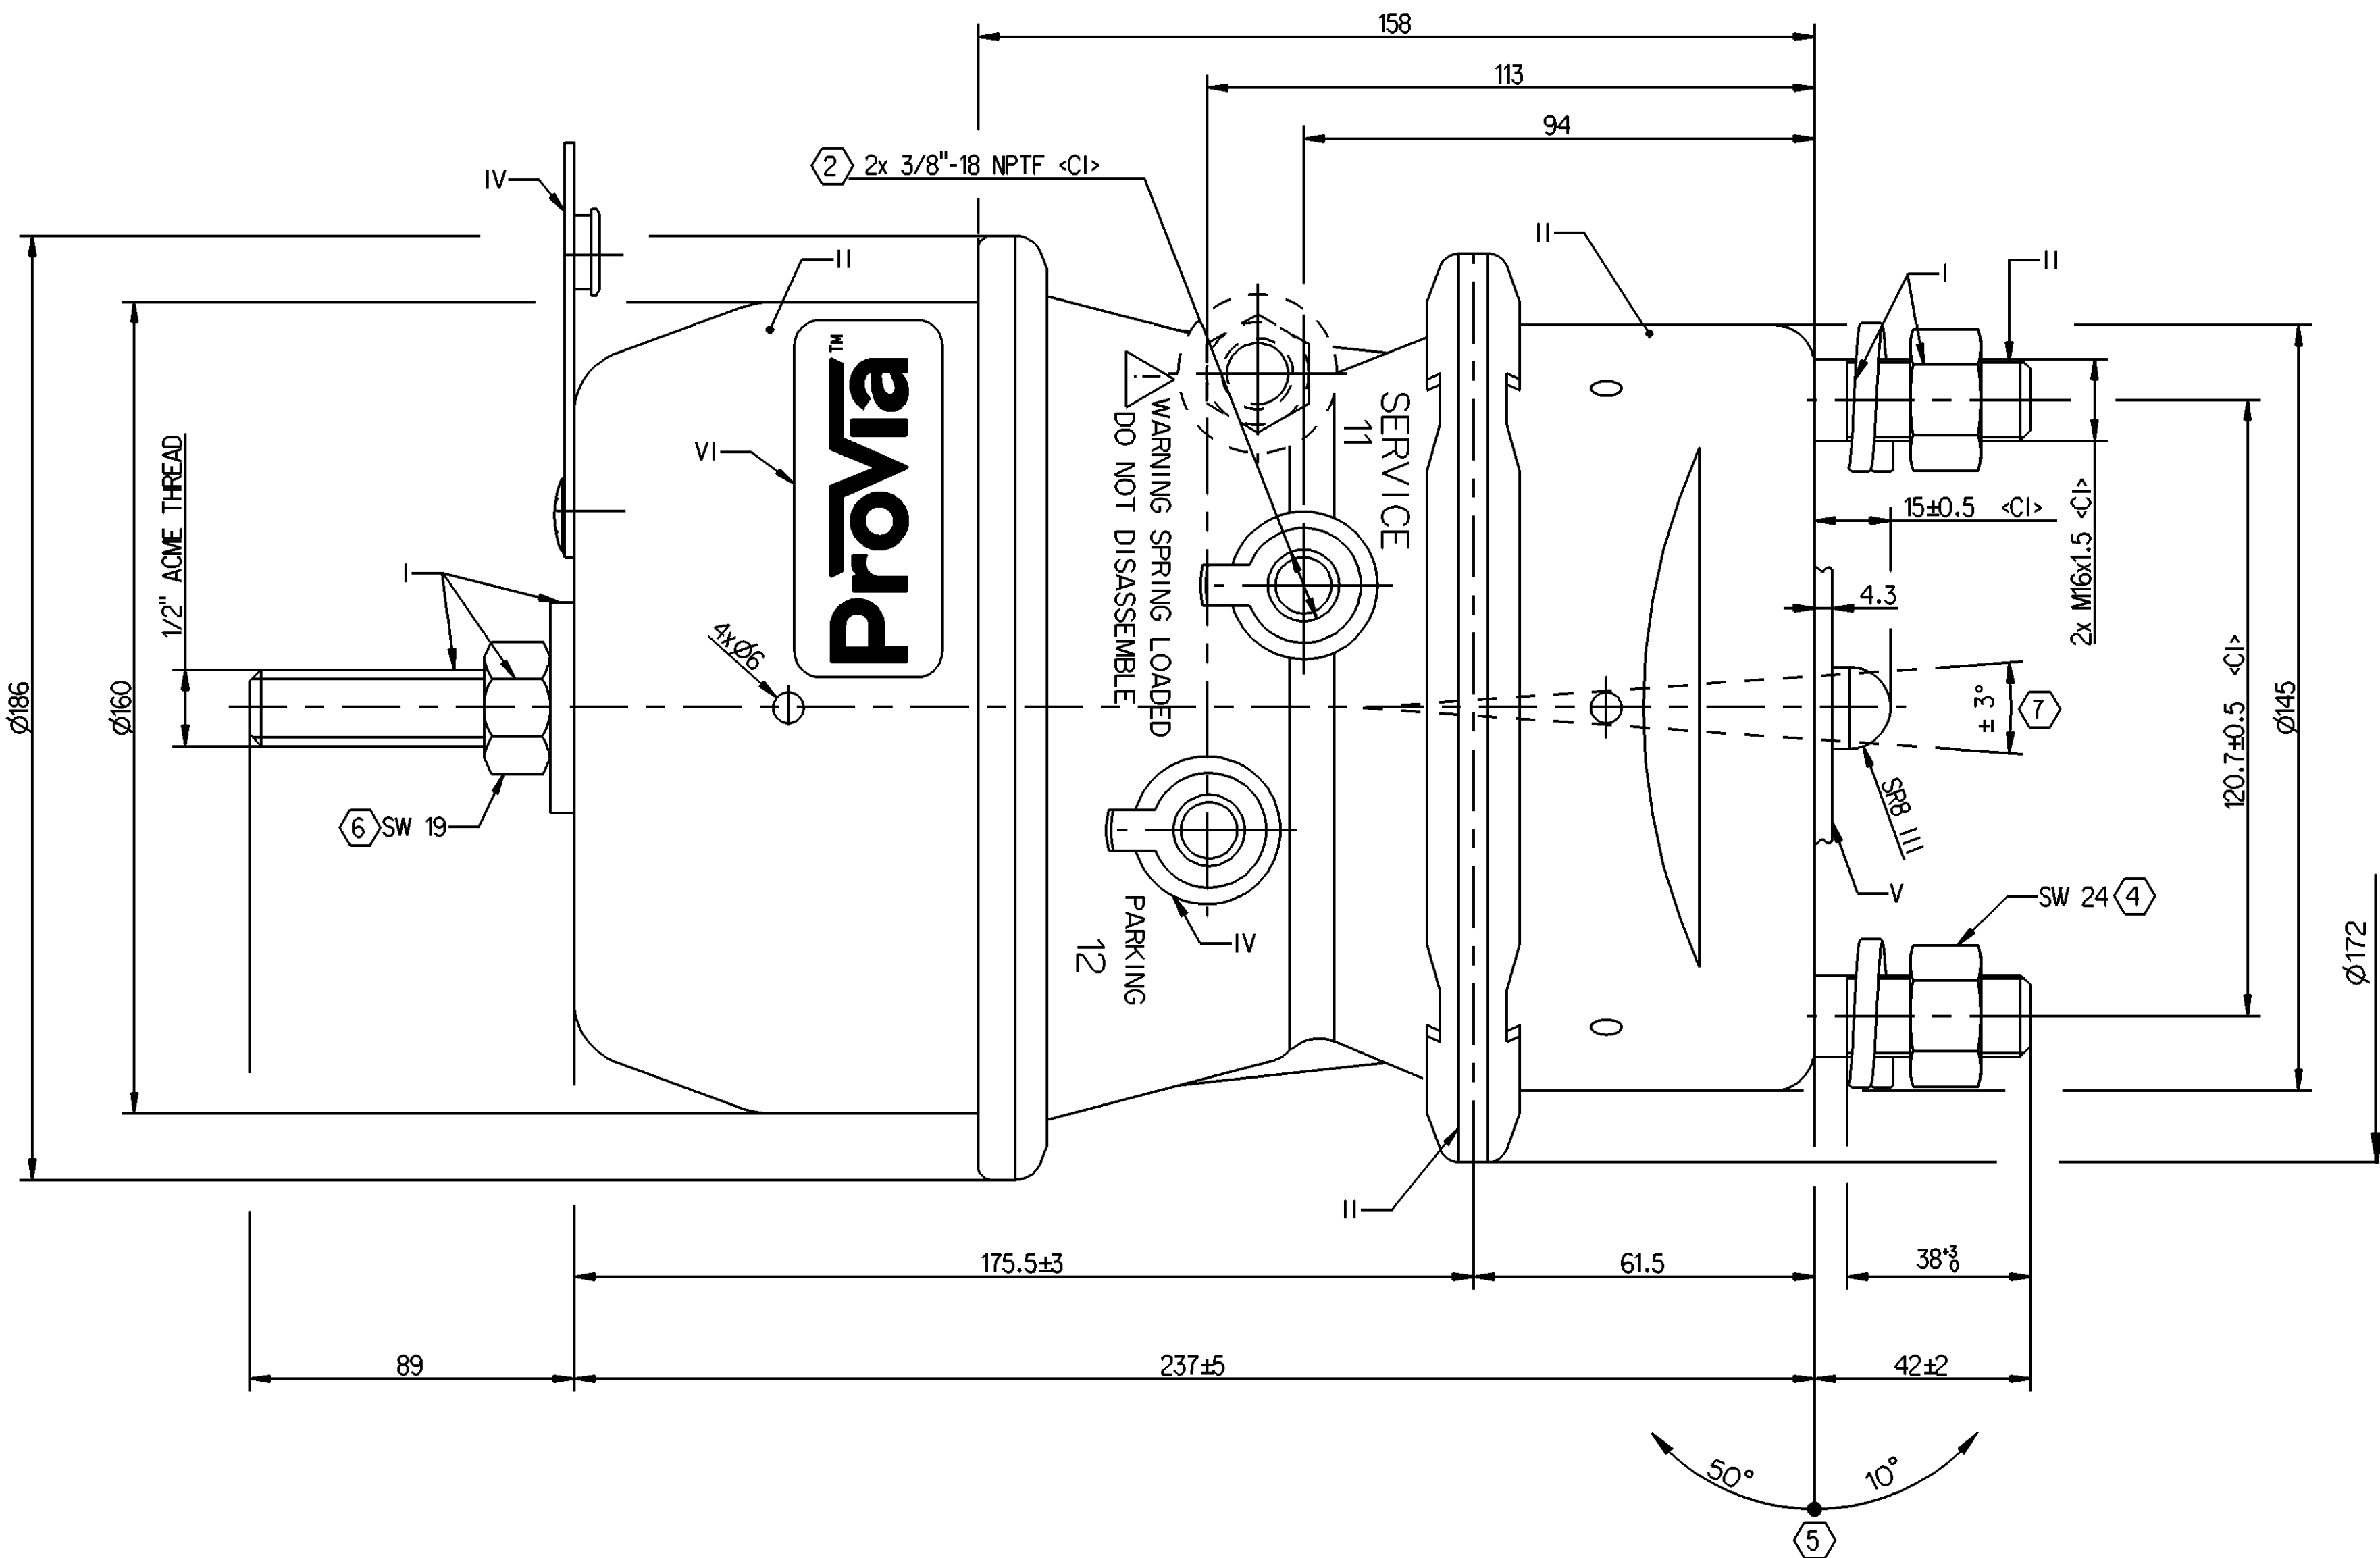


I	SURFACE PROTECTION
II	ZINC PLATED WITH CR6+ FREE
III	ELECTRO-PAINTING
III	DACROMET
IV	HARD POLYETHYLENE
V	RUBBER
VI	STICKER

➤	SAFETY CHARACTERISTICS	0
➤	SIGNIFICANT CHARACTERISTICS	0
➤	CUSTOMER INTERFACE	4





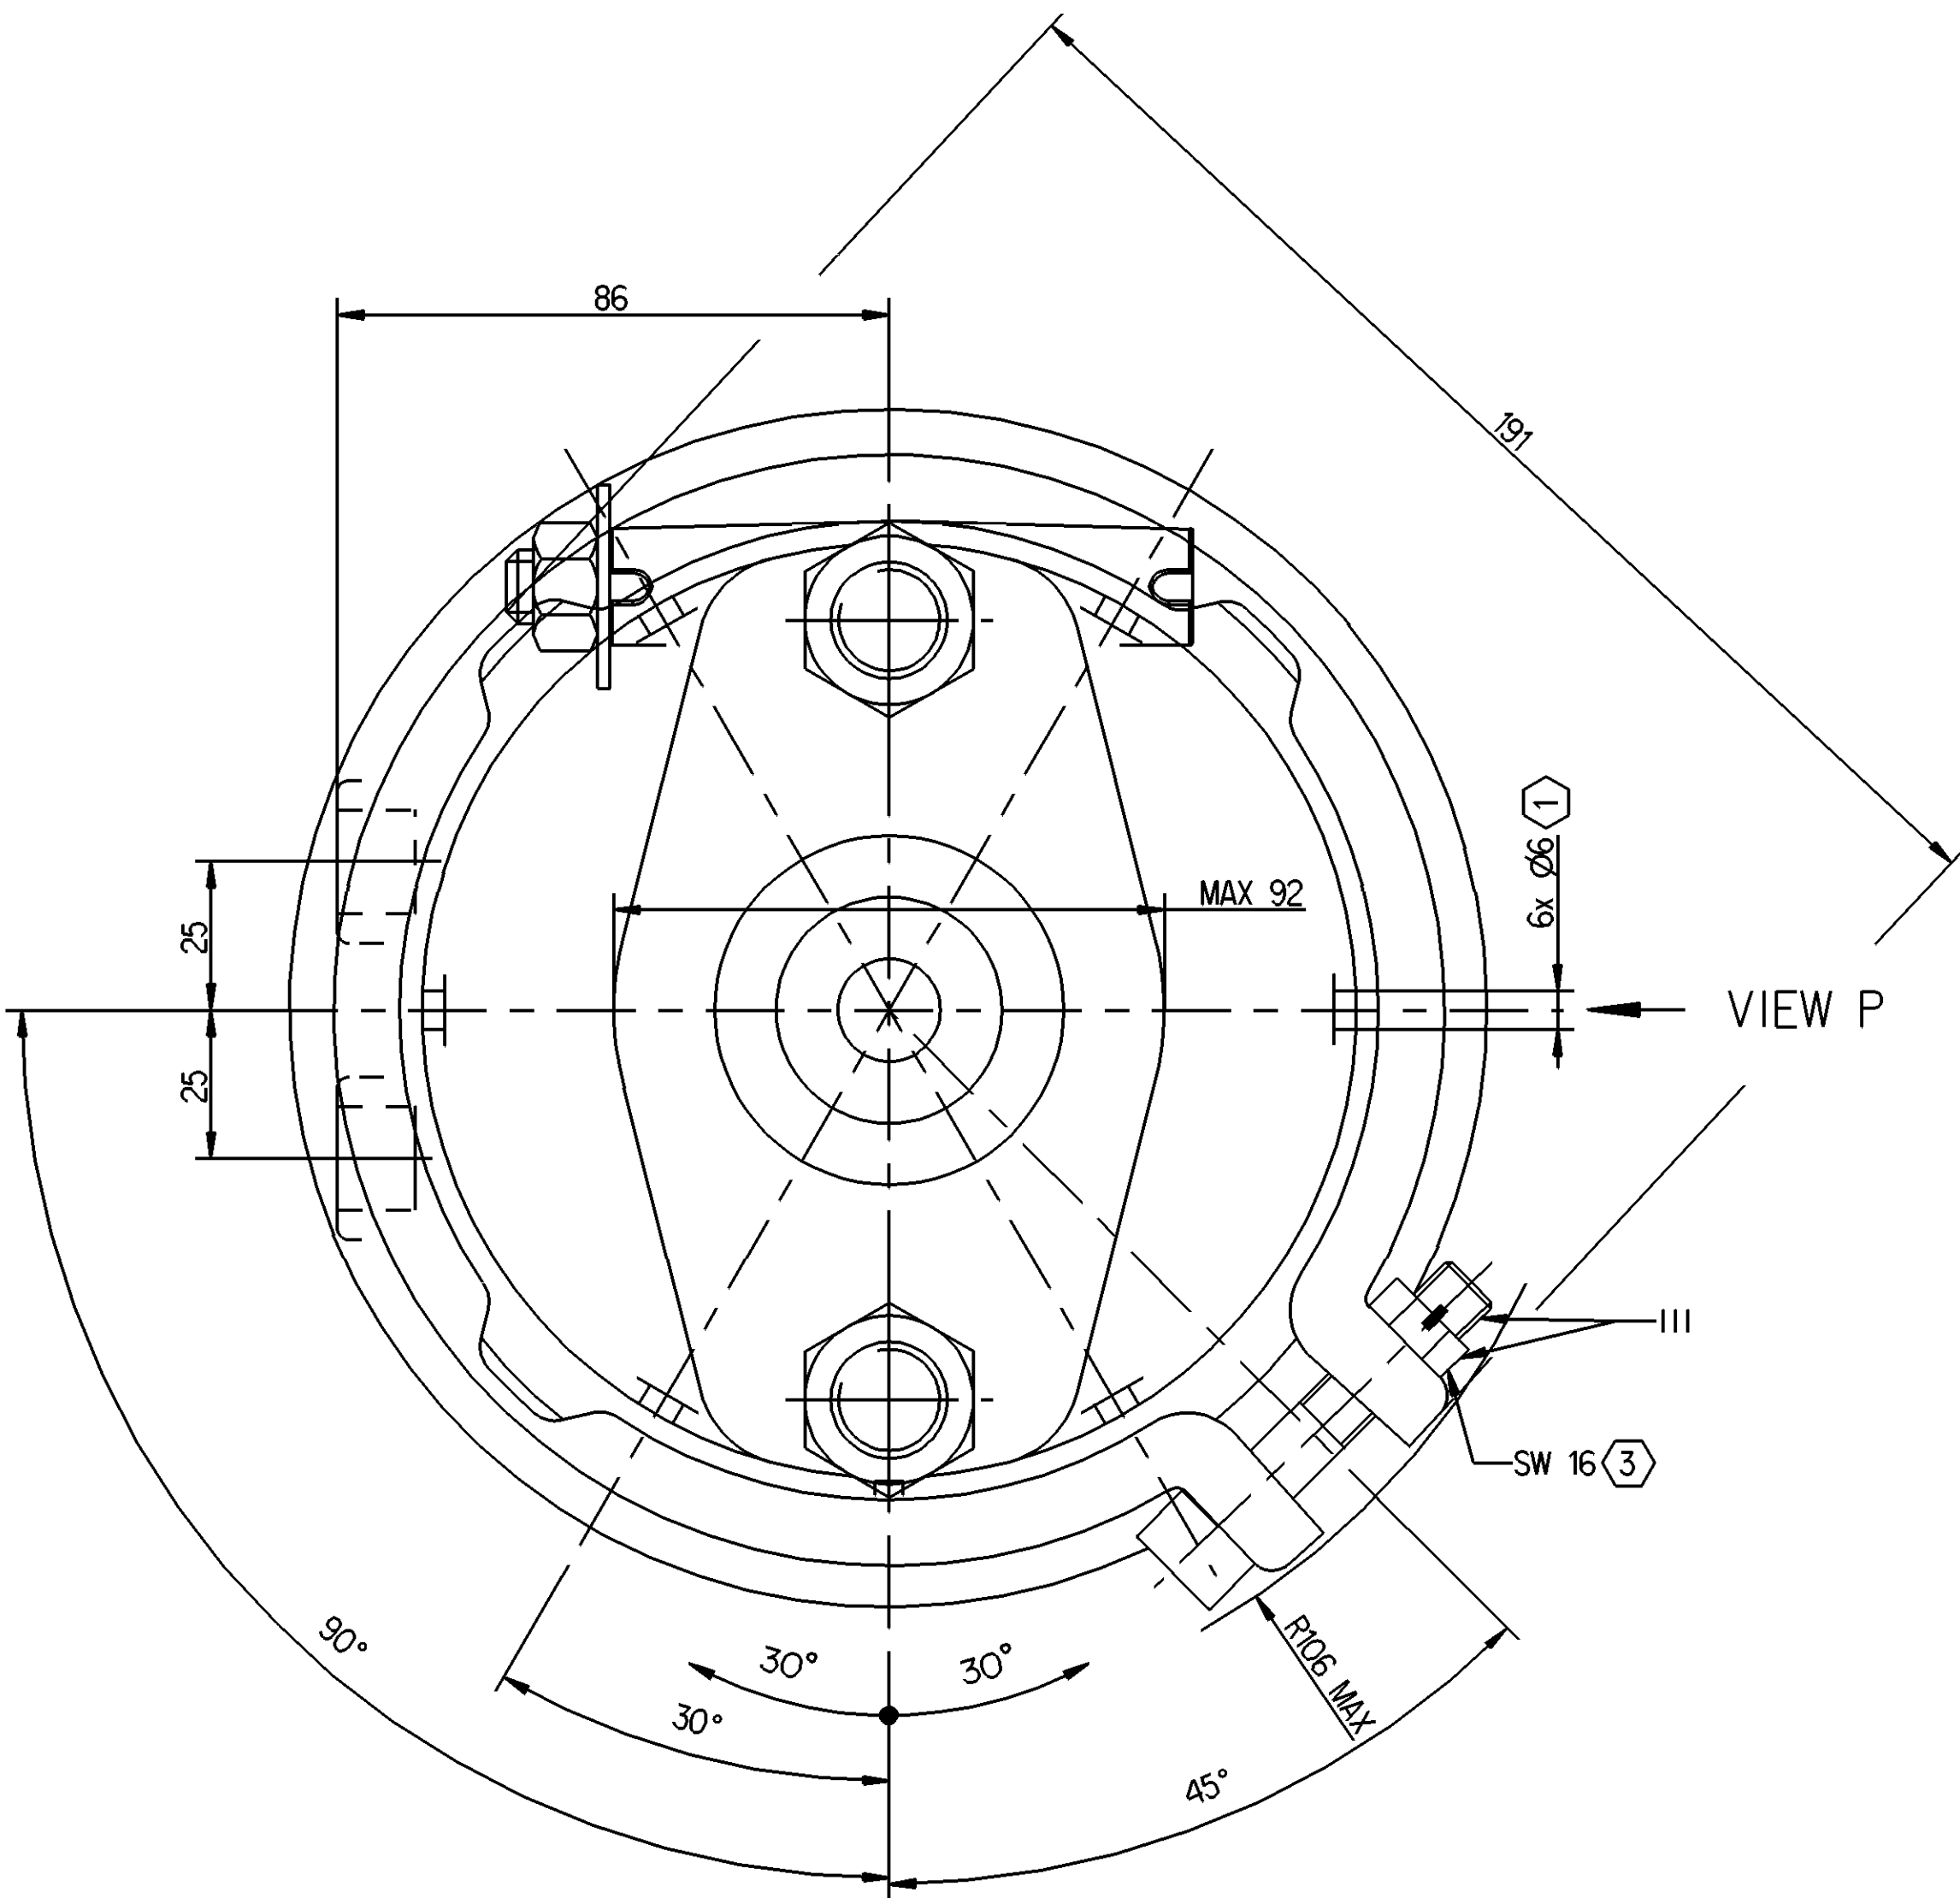


TECHNICAL REQUIREMENT:

1. STROKE:
PARKING CHAMBER: ≥ 57.1mm
SERVICE CHAMBER: ≥ 57.1mm
2. WORKING PRESSURE :
SERVICE CHAMBER Pmax : 10.5 Bar, TEMPORARILY 13 Bar
PARKING CHAMBER Pmax : 8.5 Bar, TEMPORARILY 10 Bar
3. WORKING TEMPERATURE: -40°C.....+80°C
4. THE DRAWING IS AT CAGED CONDITION, THE PARKING CHAMBER WILL BE AT UNCAGED CONDITION DURING SHIPMENT
5. WORKING MEDIUM: AIR
6. THIS PRODUCT MEETS THE REQUIREMENT OF QC/T 790 STANDARD

- ① OPEN BREATHER HOLE
- ② TORQUE: 34Nm MAX
- ③ TORQUE: 35-40Nm
- ④ TORQUE: 220±20 Nm
- ⑤ ADMISSIBLE INSTALLATION POSITION
- ⑥ TORQUE: MAX. 25Nm
- ⑦ DEFLECTION: 6° MAX AT STROKE 0mm

GRAPHS FOR INFORMATION ONLY

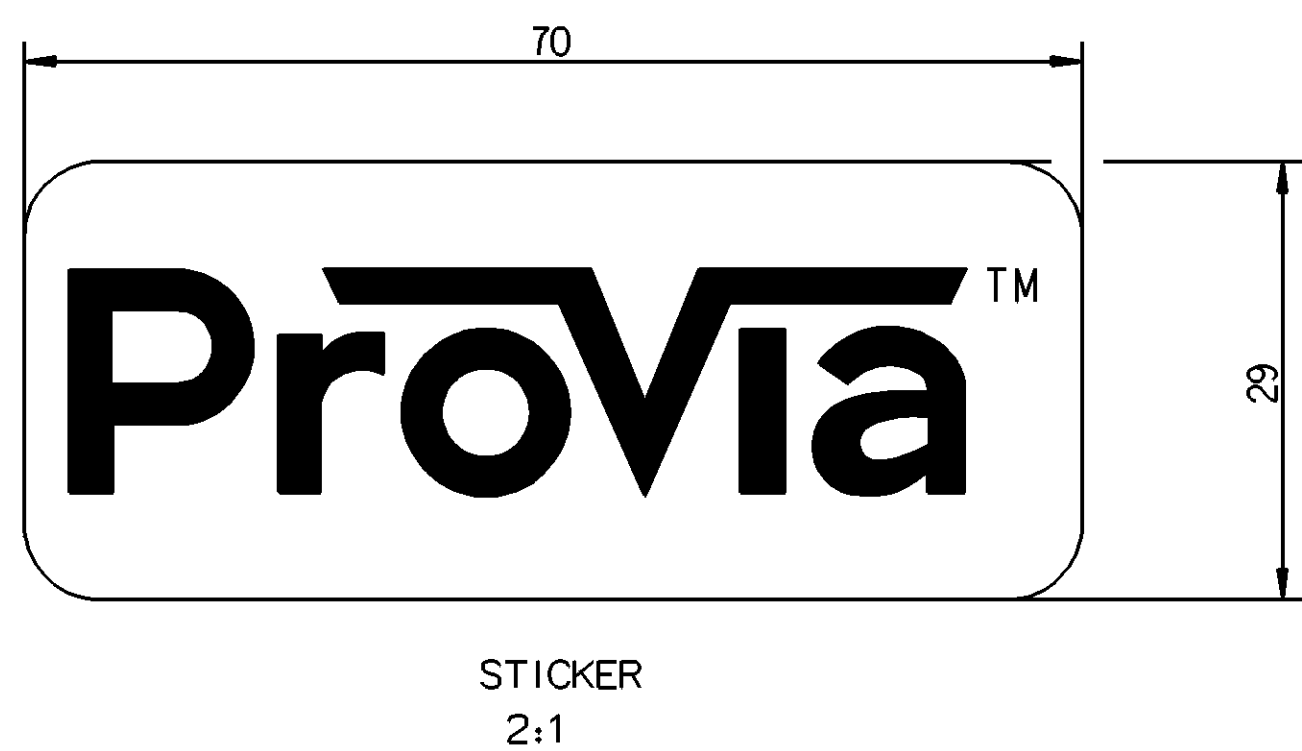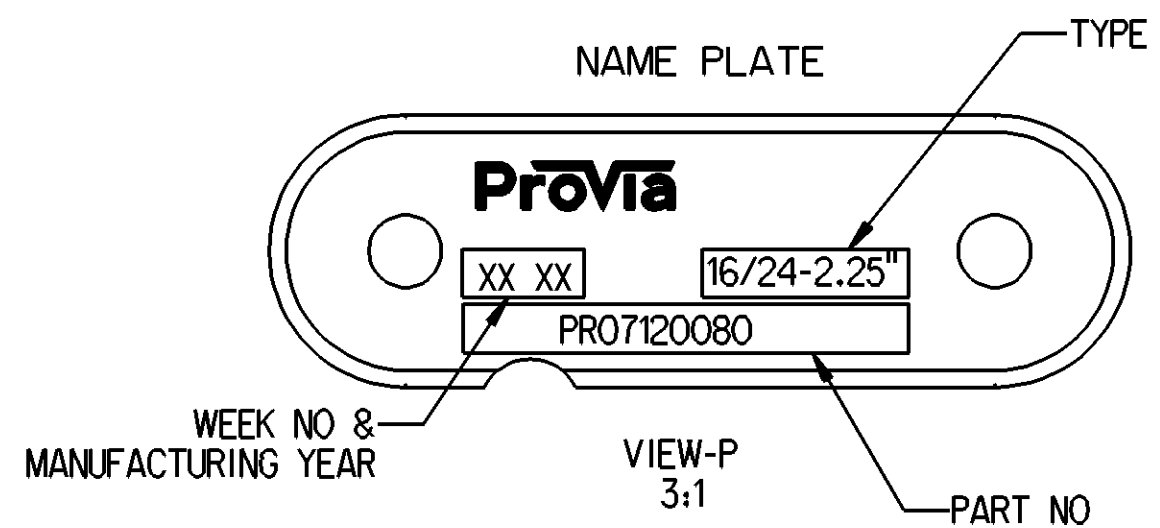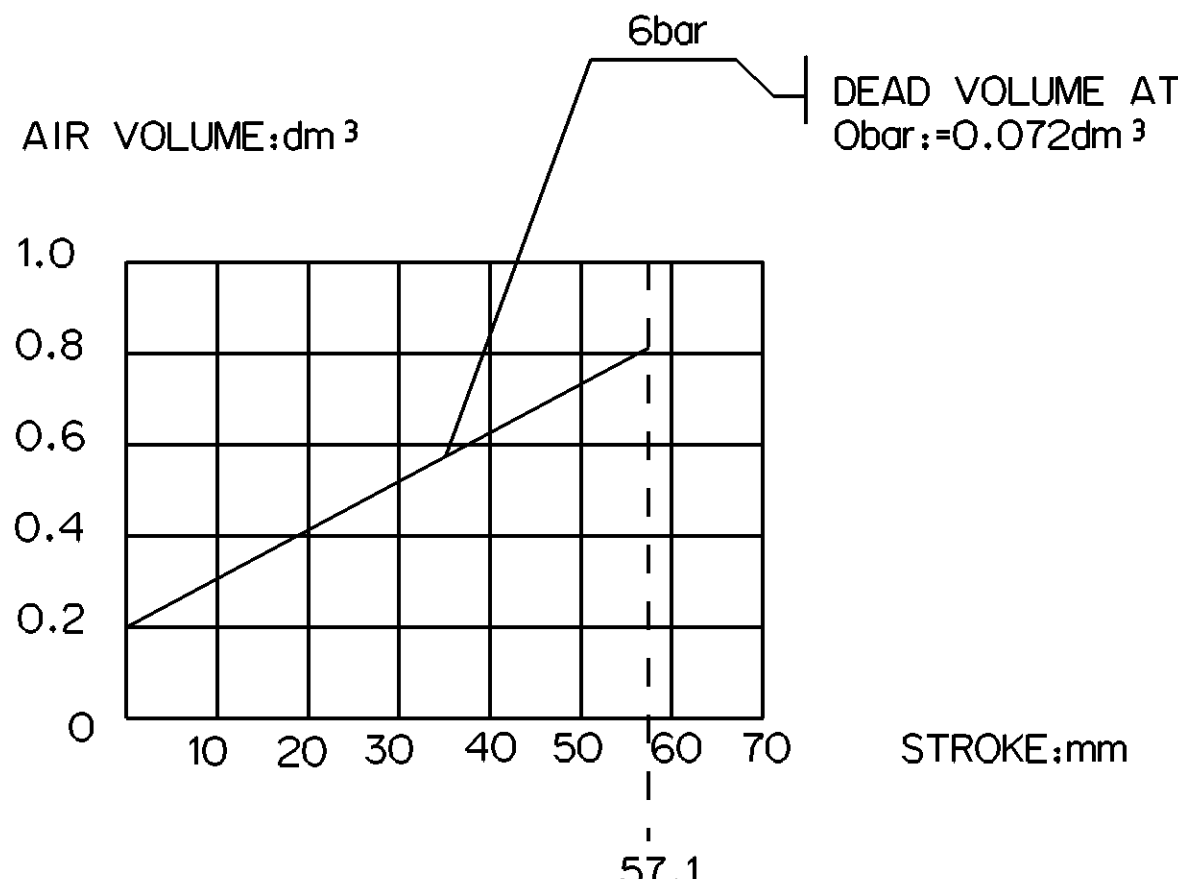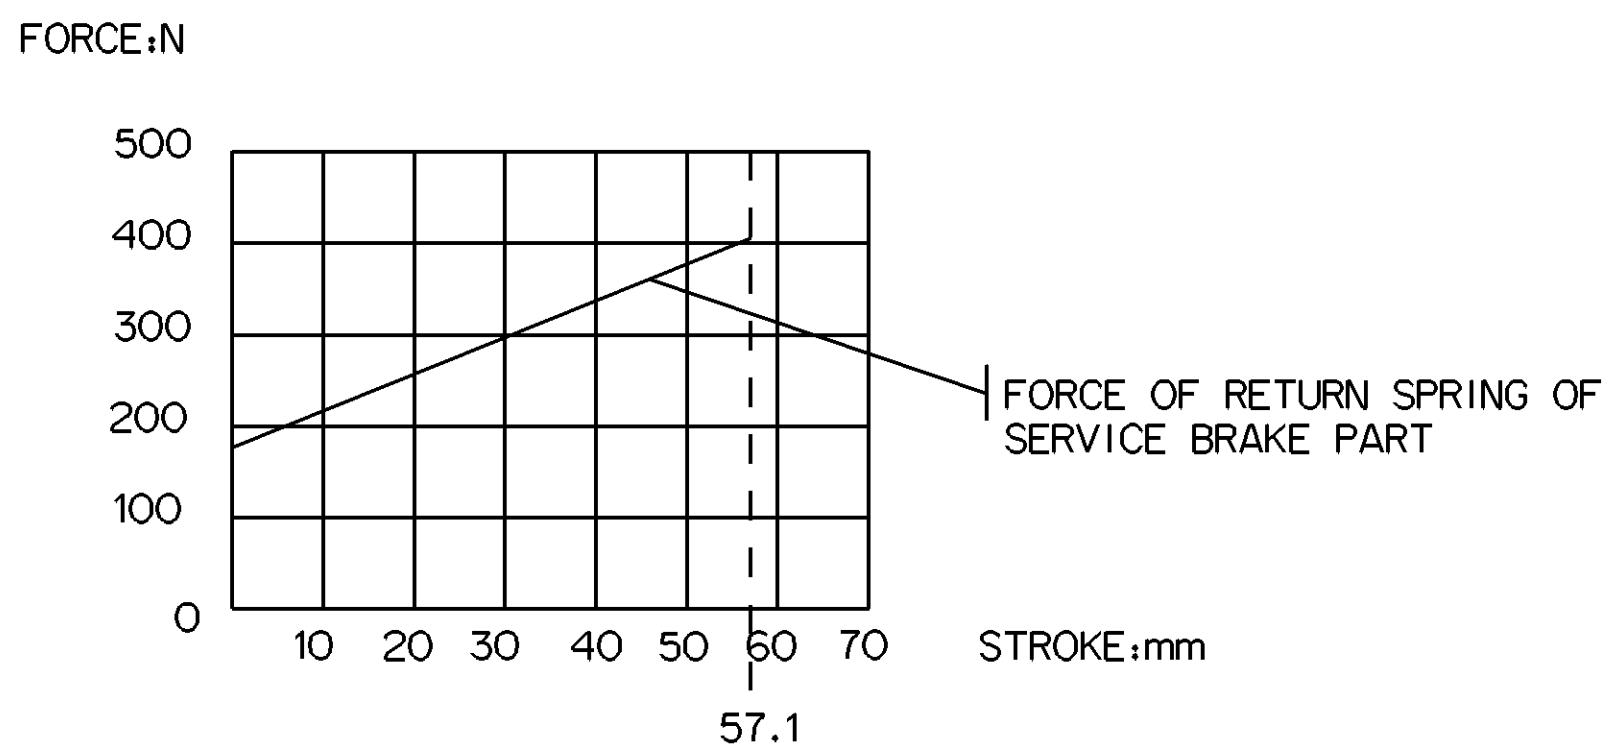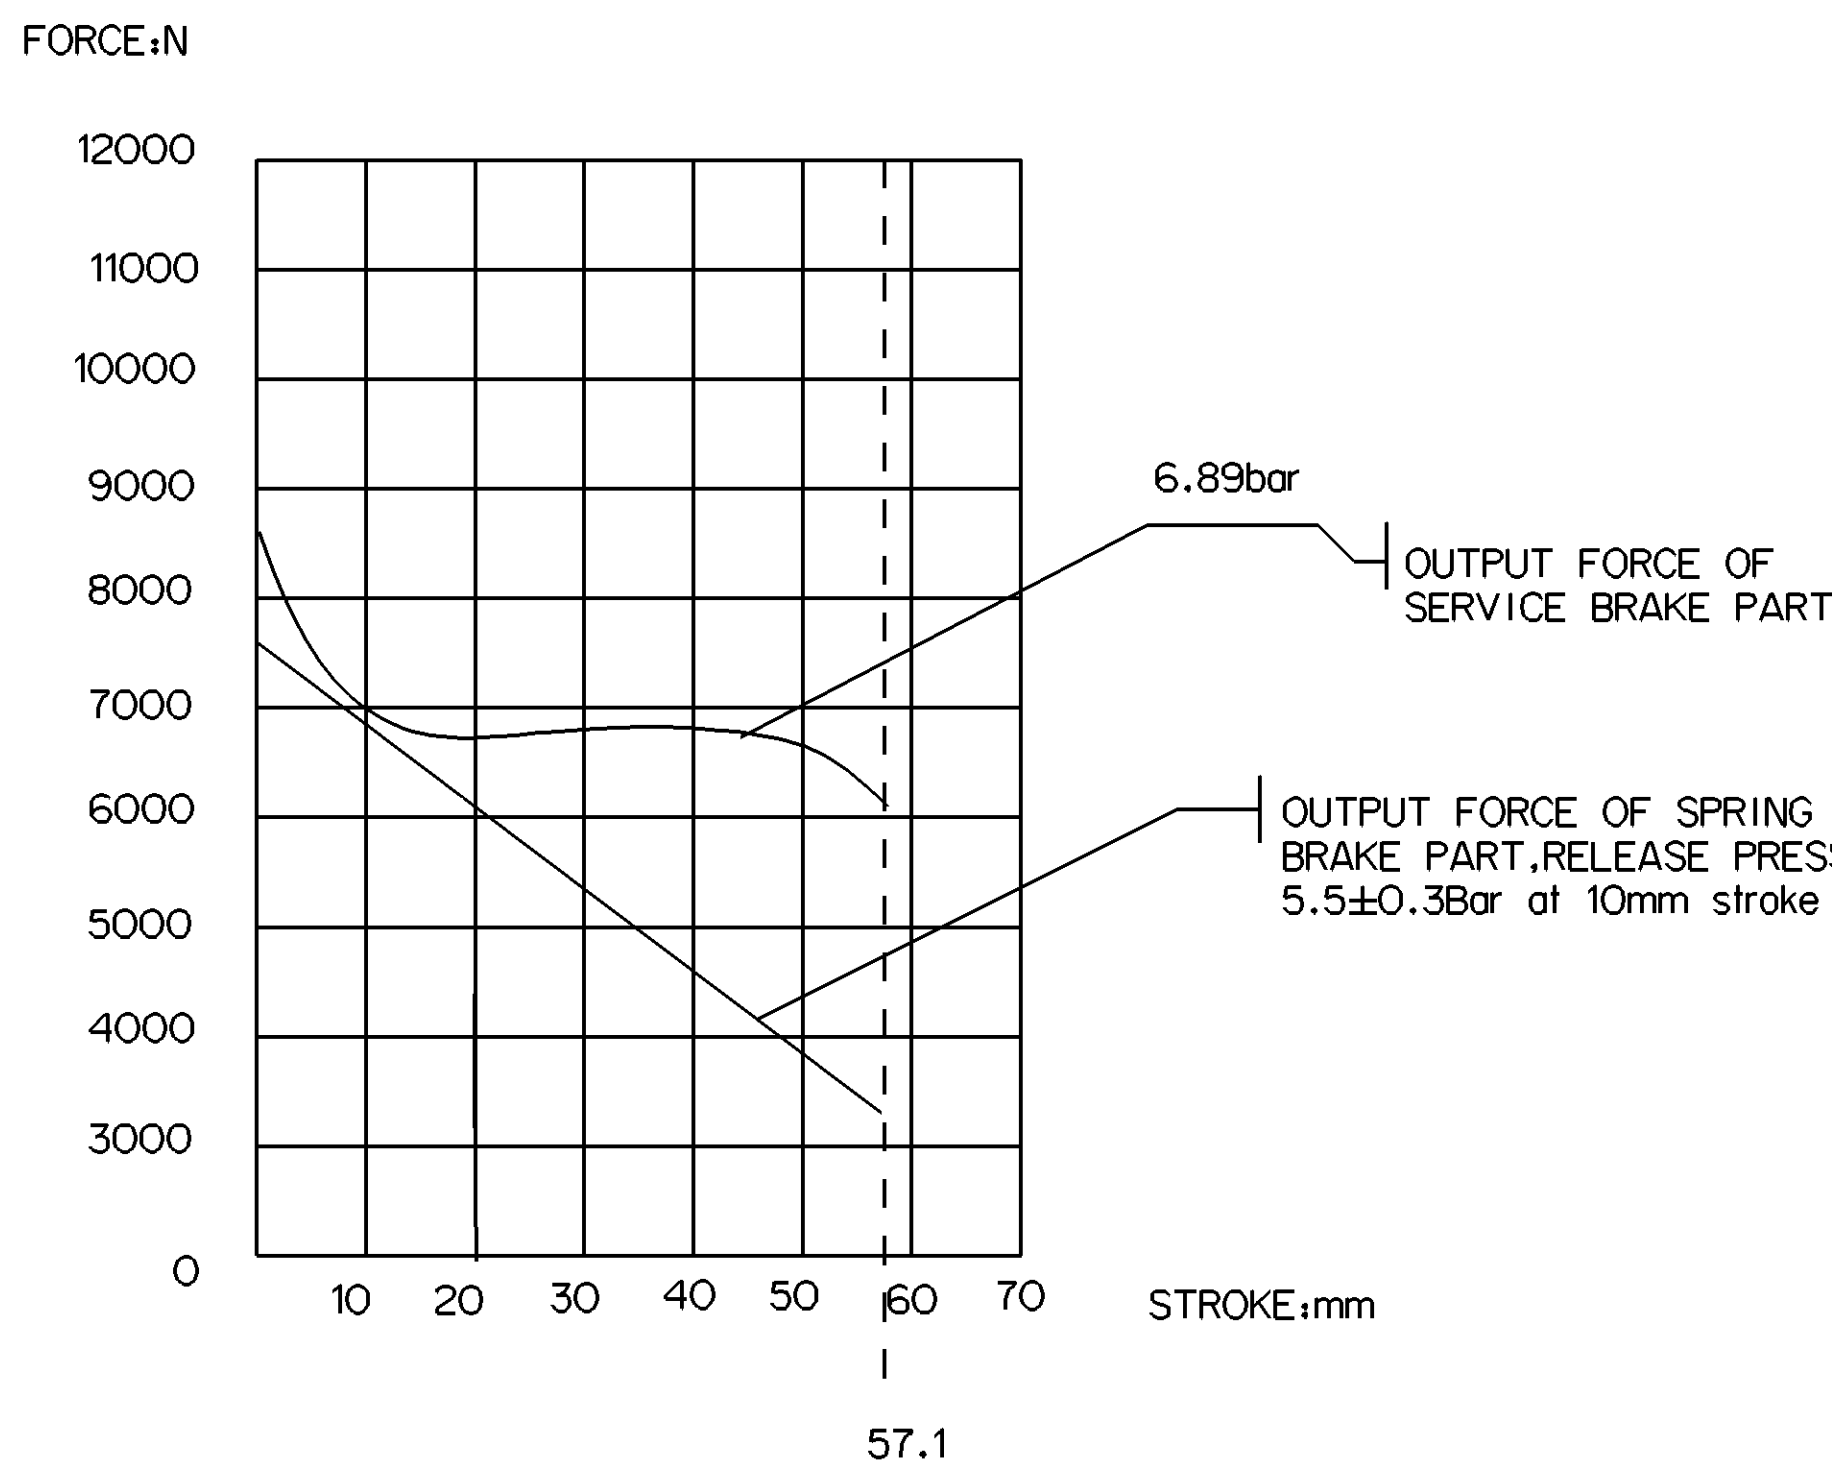

General Specifications: ISO 8435, JIS 334-1, Size ISO 14045 UP		Copyright: WABCO®		ProVia	
Further Technical Data: PRO 712 008 0		Date: 2023-04-27		Signature: [Signature]	
Doc. Code: 0350		Sheets: 1		To: 14	
General Tolerances: 420-261		2023-04-27		Signature: [Signature]	
Range of Nominal Dimensions (± mm)		Max. 1		Min. 1	
Fine		± 0.05		± 0.10	
Medium		± 0.1		± 0.2	
Coarse		± 0.2		± 0.5	
Tapped holes acc.:		-		-	
Tolerance Class Applied: Chromodur		A 0		CRO	
Further Technical Data: PRO 712 008 0		Date of first issue: 2023-04-28		Doc. Code: Language: Sheet	
Revision: 1		Revision: 1		Revision: 1	
PRO 712 008 0		005 EN		1/1	
Replacement for:		542LAW		-	