
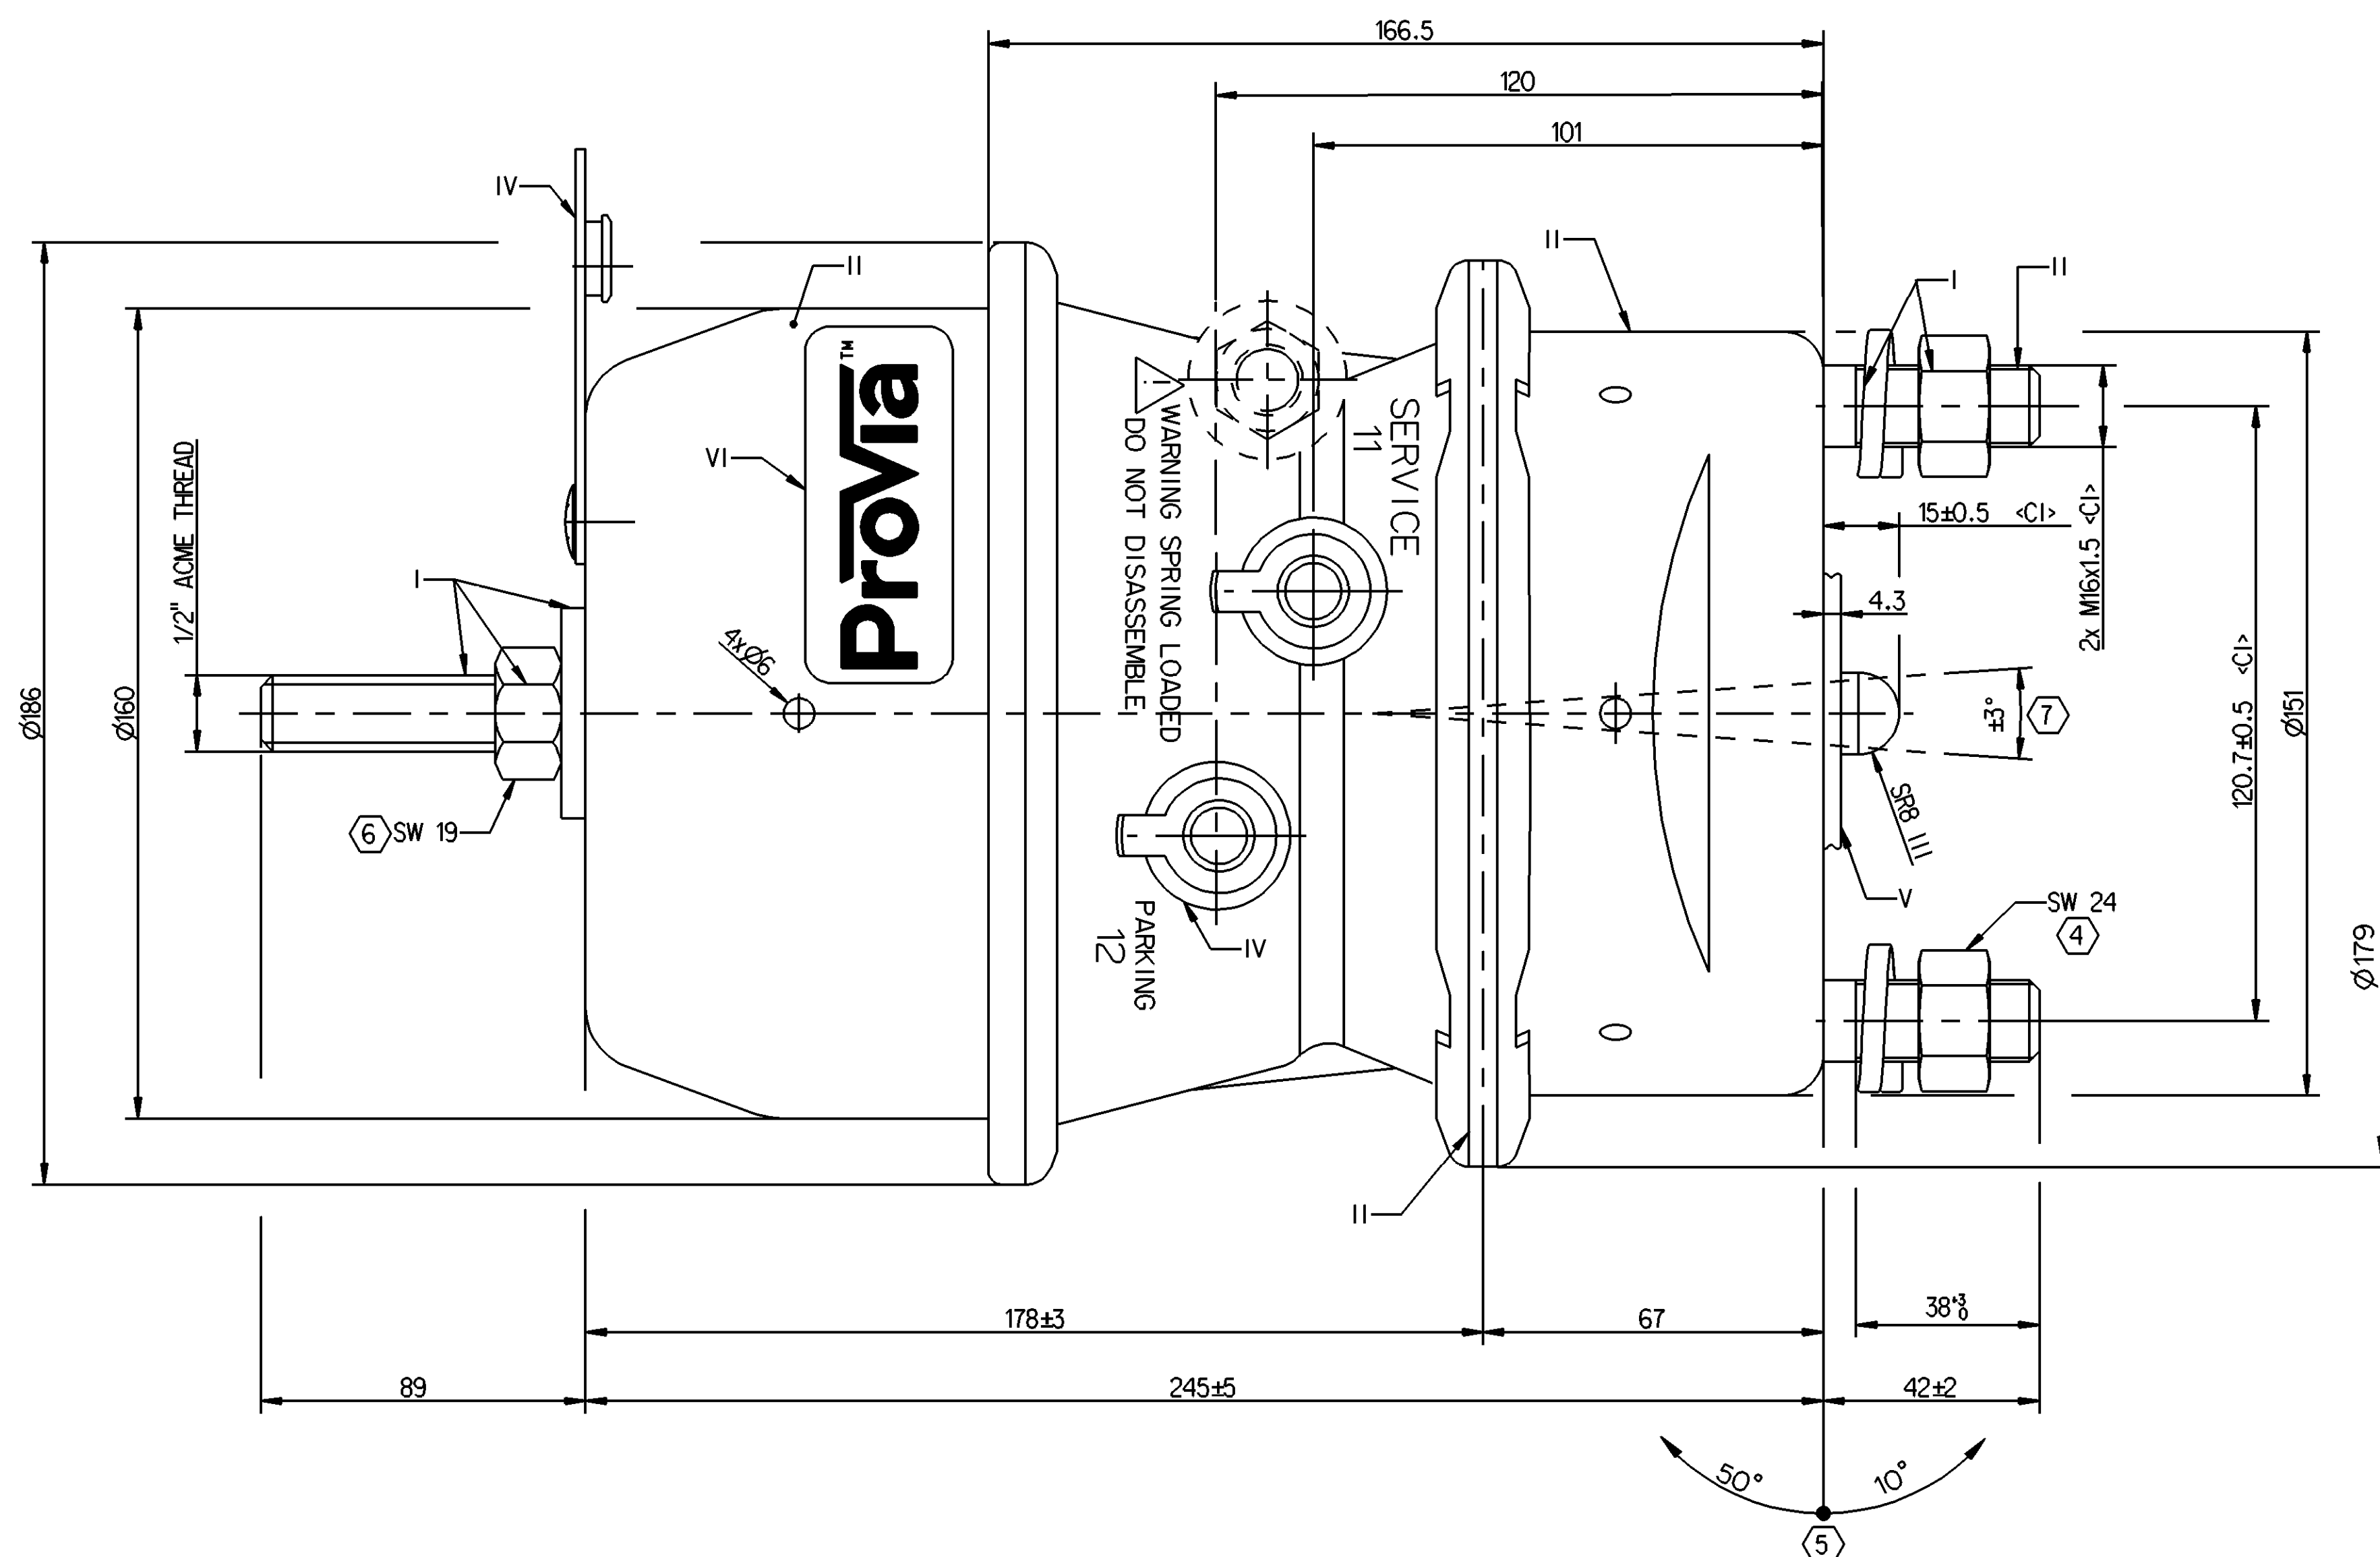
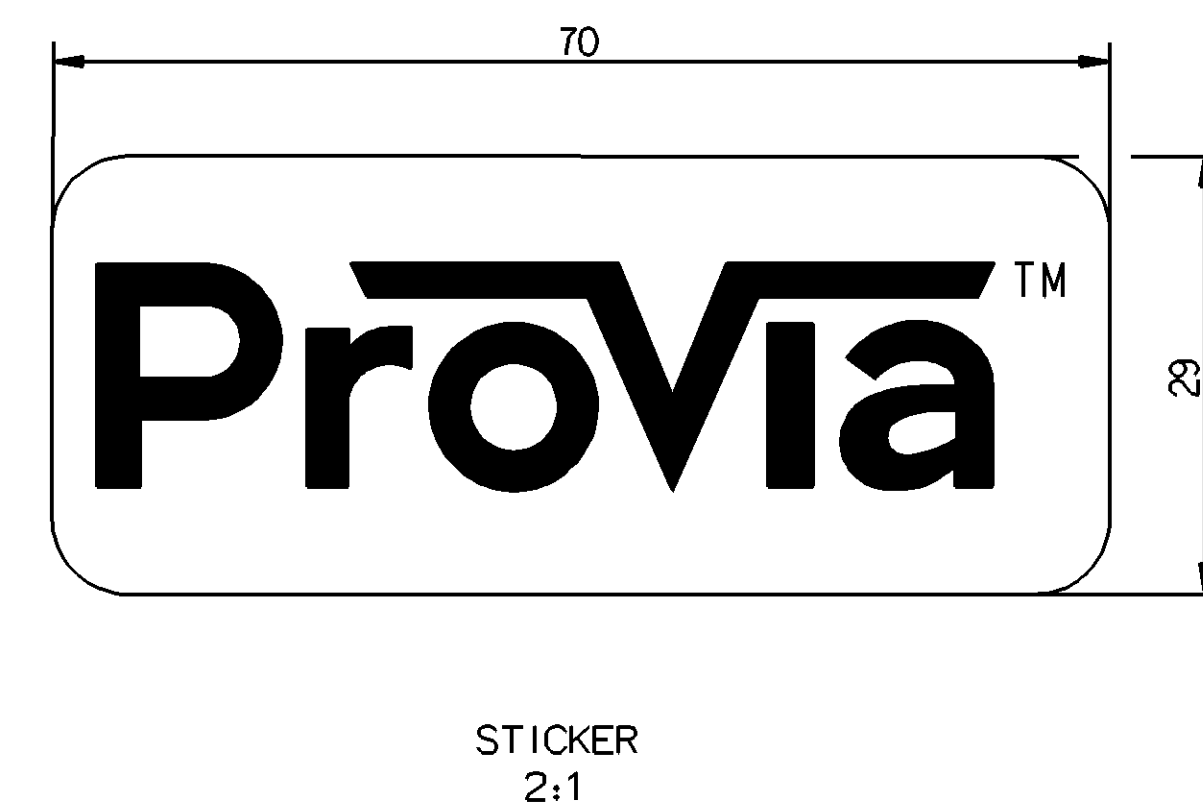
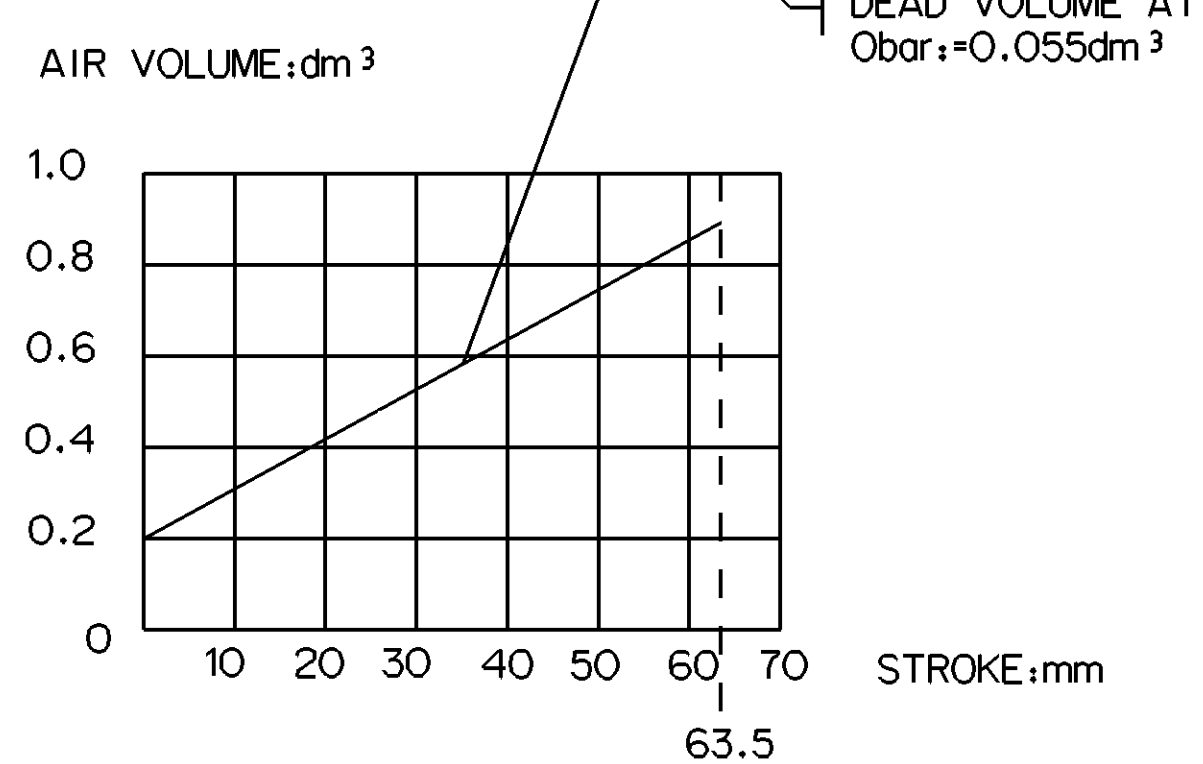


|                                 |    |
|---------------------------------|----|
| 23                              | 24 |
| <1> SAFETY CHARACTERISTICS      | 0  |
| <2> SIGNIFICANT CHARACTERISTICS | 0  |
| <C1> CUSTOMER INTERFACE         | 4  |

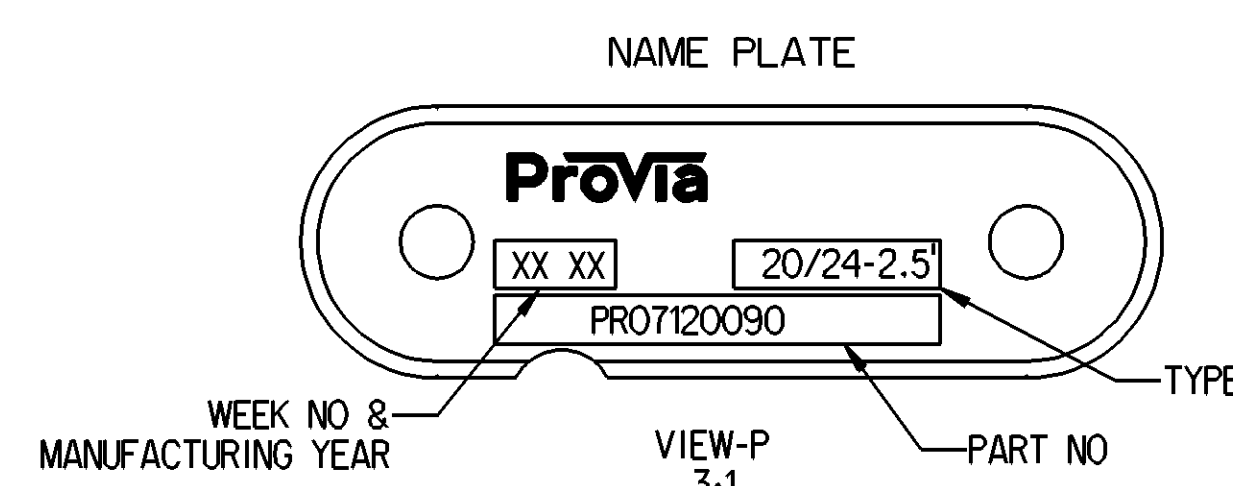

1. STROKE:  
PARKING CHAMBER:≥ 63.5mm  
SERVICE CHAMBER:≥ 63.5mm
- 2.WORKING PRESSURE :  
SERVICE CHAMBER Pmax : 10.5 Bar, TEMPORARILY 13 Bar  
PARKING CHAMBER Pmax : 8.5 Bar, TEMPORARILY 10 Bar
- 3.WORKING TEMPERATURE: -40℃.....+80℃
- 4.THE DRAWING IS AT CAGED CONDITION,THE PARKING  
CHAMBER WILL BE AT UNCAGED CONDITION DURING SHIPMENT
- 5.WORKING MEDIUM: AIR
- 6.THIS PRODUCT MEETS THE REQUIREMENT OF QC/T 790 STANDARD

[illegible]