

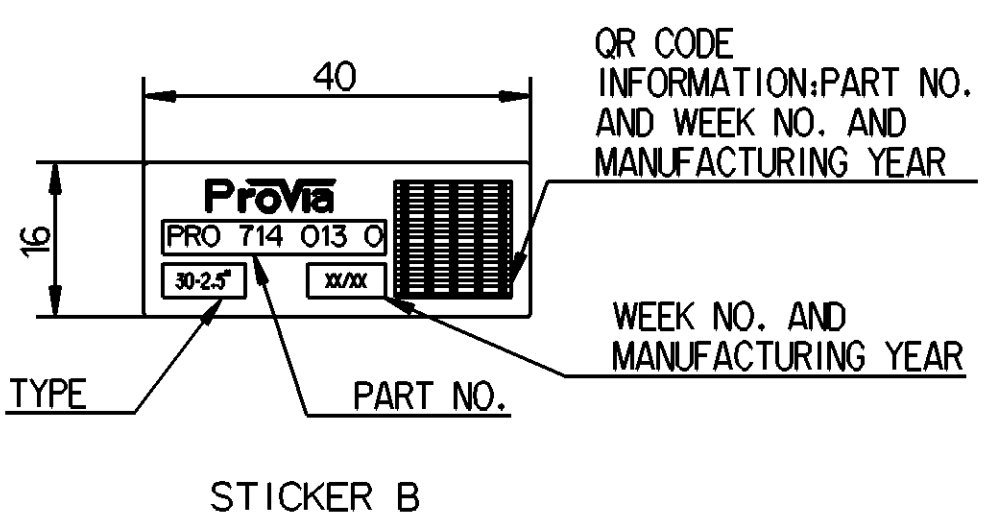
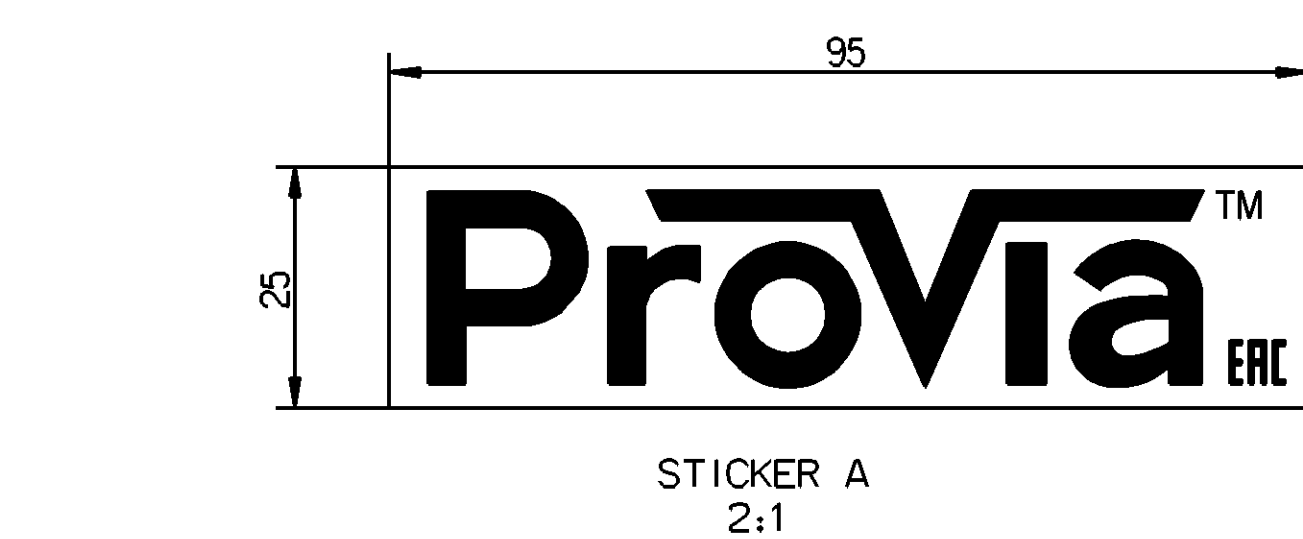
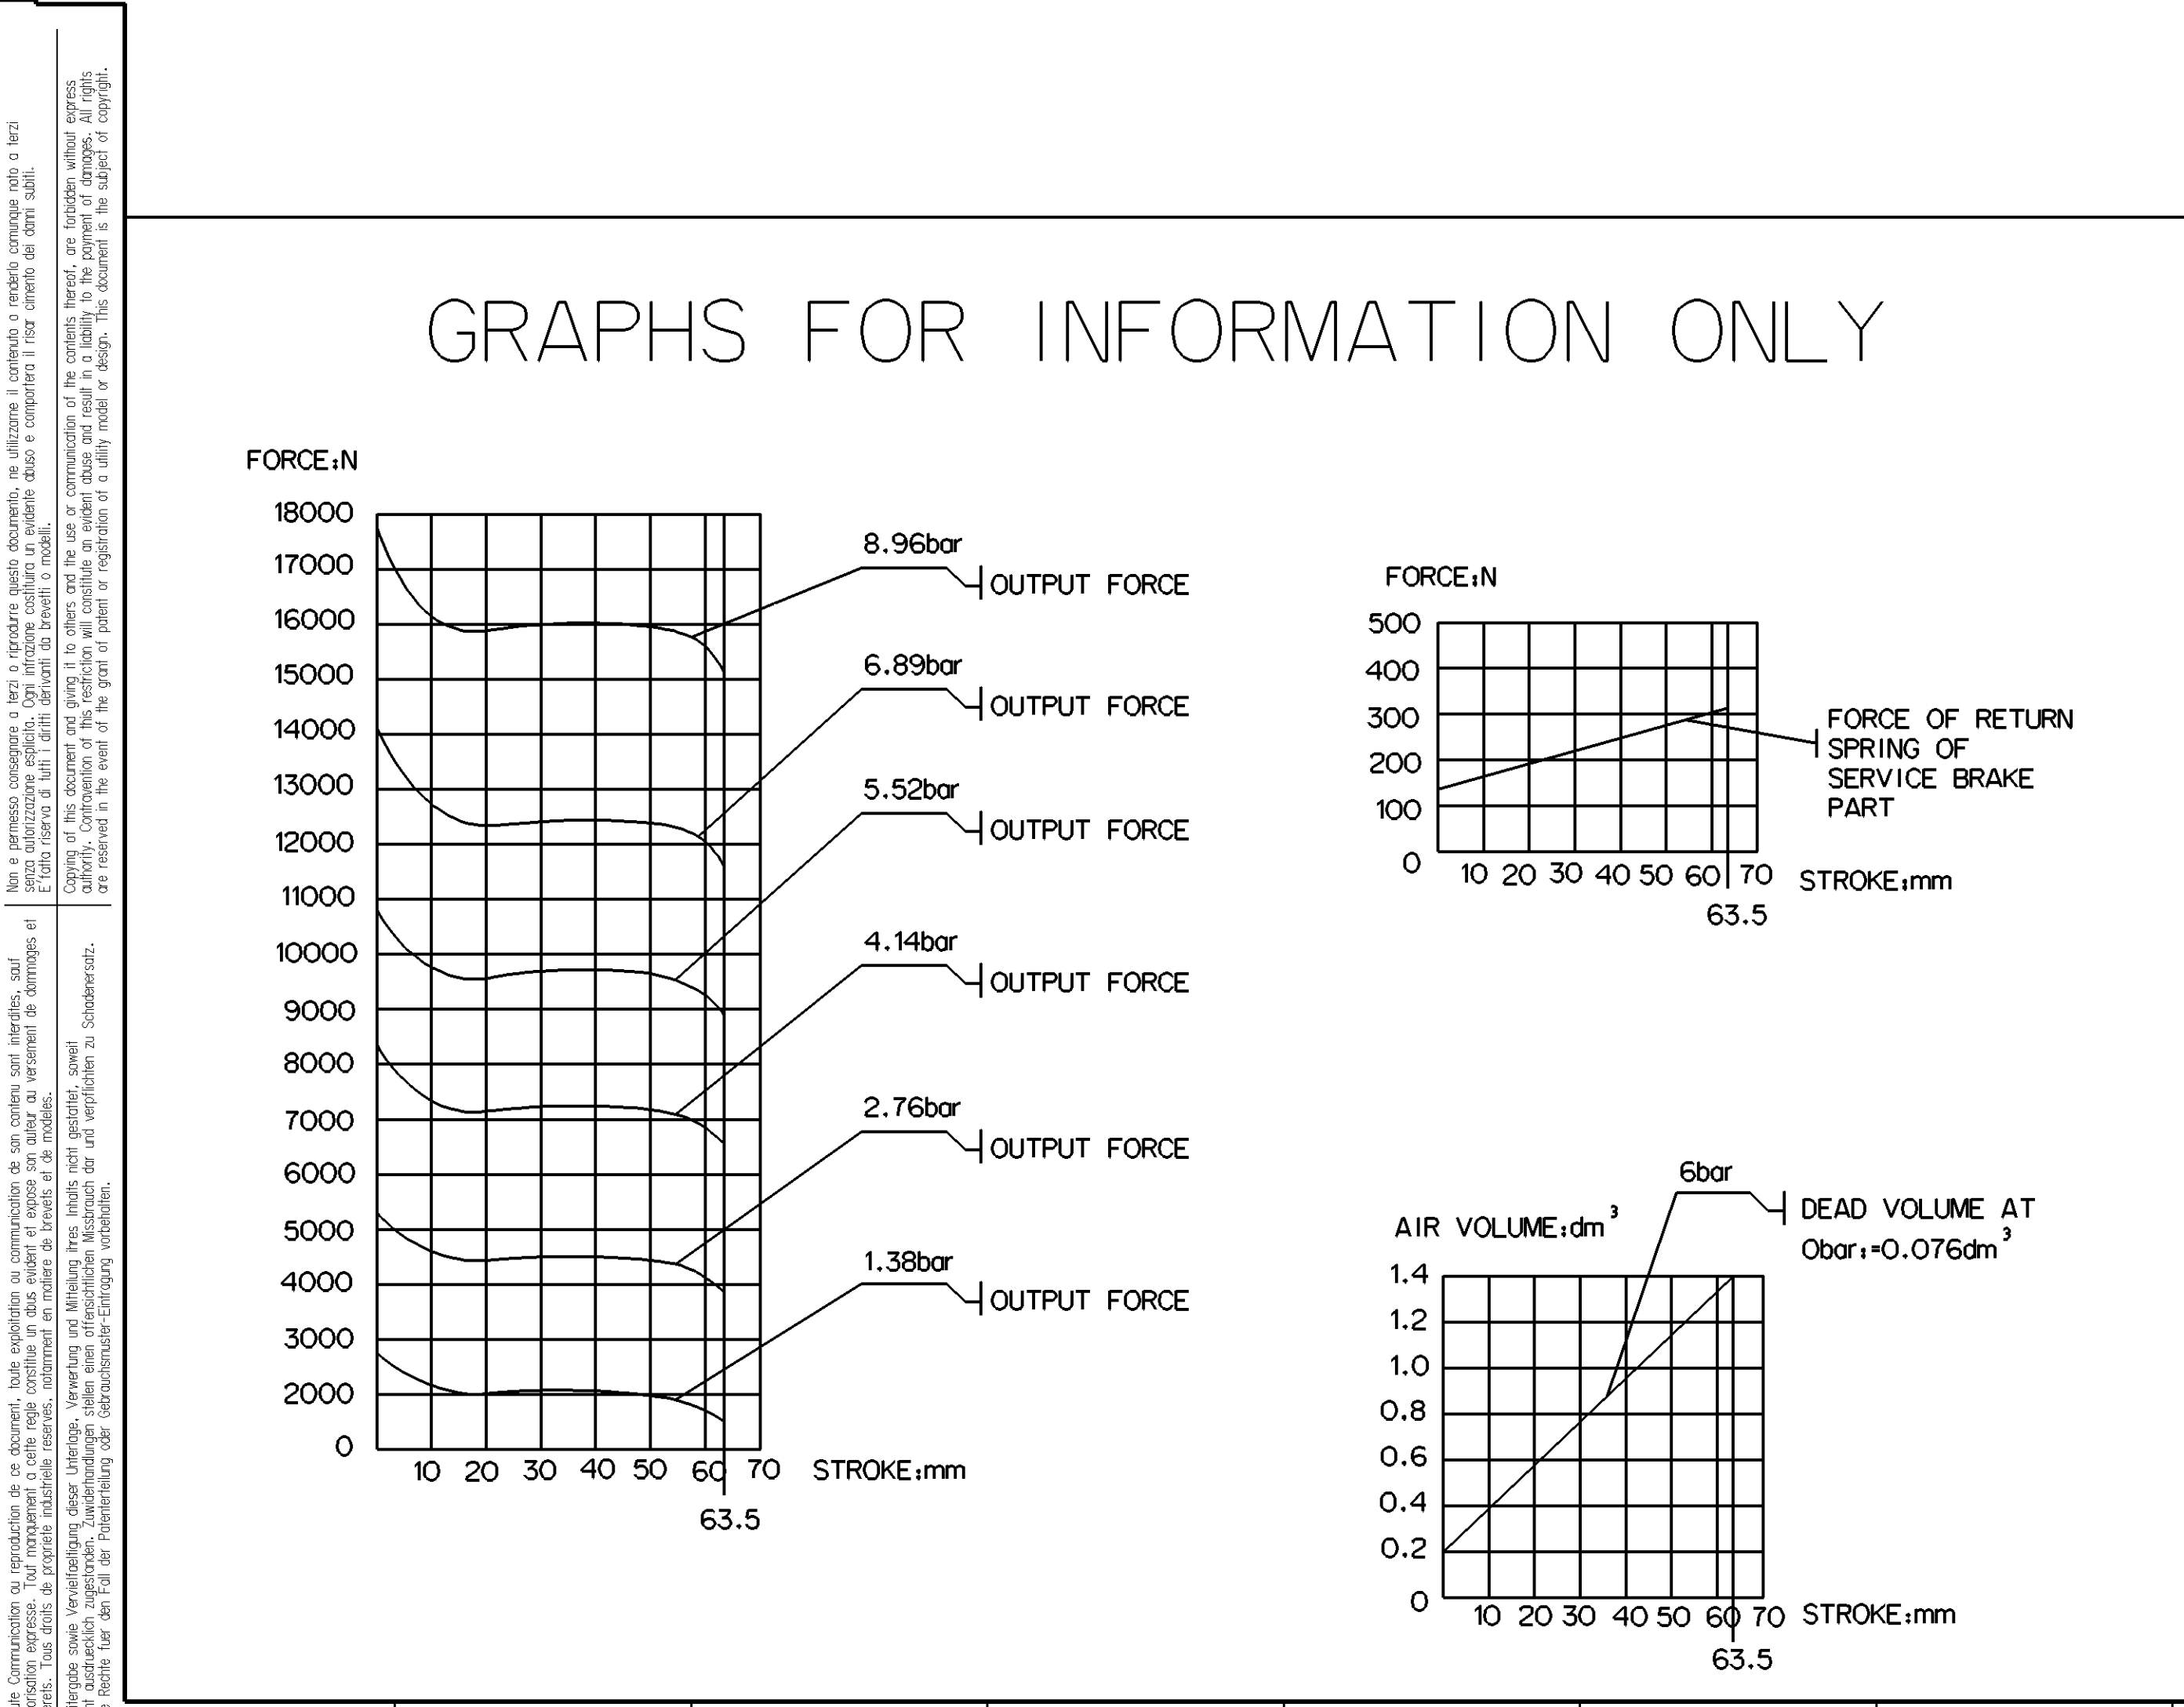


	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	
A	SURFACE PROTECTION														<1> SAFETY CHARACTERISTICS		0
	I ZINC PLATED WITH CR6+ FREE														<2> SIGNIFICANT CHARACTERISTICS		0
	II ELECTRO-COATING														<CI> CUSTOMER INTERFACE		4
	III DACROMET																
	IV HARD POLYETHYLENE																
	V STICKER																

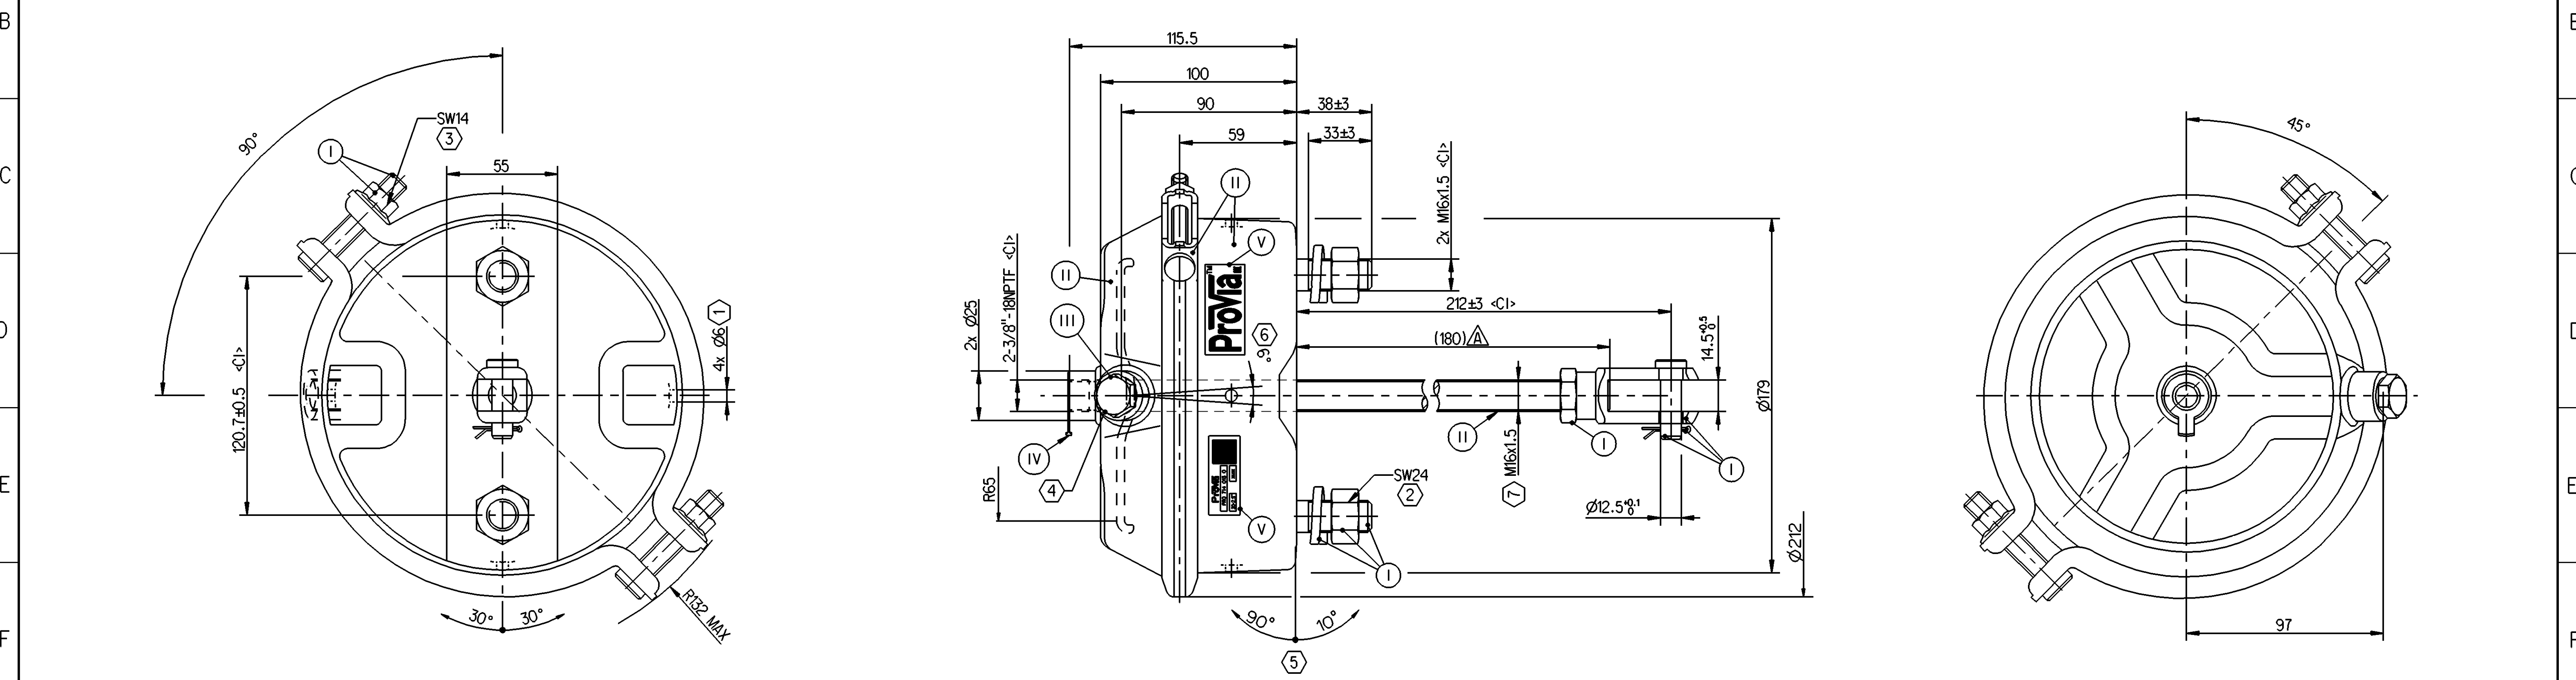

- TECHNICAL REQUIREMENT:
- 1.STROKE: $\geq 63.5\text{mm}$ (2.5")
 - 2.WORKING PRESSURE P_{MAX} : 8.5BAR
TEMPORARILY: 10Bar
 - 3.WORKING TEMPERATURE: $-40^{\circ}\text{C} \dots +80^{\circ}\text{C}$ ($-40^{\circ}\text{F} \dots +176^{\circ}\text{F}$)
 - 4.WORKING MEDIUM: AIR

- ① OPEN BREATHER HOLE
- ② TORQUE: $220 \pm 20\text{Nm}$
- ③ TORQUE: $\geq 25\text{Nm}$
- ④ TORQUE: $45 \pm 5\text{Nm}$
- ⑤ ADMISSIBLE INSTALLATION POSITION
- ⑥ DEFLECTION: 6° MAX AT STROKE 0mm
- ⑦ TORQUE: $80 \pm 10\text{Nm}$

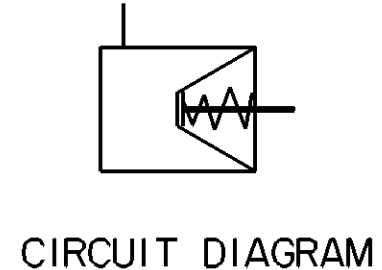

General Specifications: ISO 8015, JED-334-1, Size ISO 14405 LP				Copyright ZF®		ProVia	
Further Technical Data: PRO 714 016 0				Date	Signature	BRAKE CHAMBER CAM 30	
Doc. Code: 035		Sheet: 1	To: 5	2023-05-05	Verkalasalam		
General Tolerances JED-261		Range of Nominal Dimensions (± mm)		2023-05-08	Manivannan		
Class	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400		
Fine		±0.5	±1	±1.5	±2		
Medium	X	±1	±2	±3	±4		
Coarse		±2	±3.5	±5	±6.5		
Tapped Holes acc. JED-686				Dimensions in mm			
1) Tolerance Class Applied Crossmarked				Mass	Scale		
				4.4 kg	NTS		
				Size	CAD System		
				A 1	CREO		
				Material No.			
				PRO 714 013 0			
				Date of first issue			
				005			
				Language			
				EN			
				Sheet			
				1/1			
				Revision			
				4x A			
				Tech. Resp.			
				5340_AM			
				Replacement for			