

SERVICE INFORMATION

Doc_000138_en

11.04.2023

FIRMWARE UPDATE FILE SMARTBOARD (COMPATIBLE WITH TEBS E3)

This document is providing step by step instructions for updating the new SmartBoard to enable compatibility with TEBS E3 Standard, Premium and Multivoltage modulators.



UPDATING THE SMARTBOARD

1. Download the update file from below link:

[Firmware update file Smartboard II \(compatible with TEBSE3\)](#)

2. Extract the file and save the file "SBII_SB020140_dpl2.hex" on your computer.
3. Open the SmartBoard Diagnostic Software and go to the tab "SYSTEM":




SERVICE INFORMATION

Doc_000138_en

11.04.2023

4. Click on "ECU update":

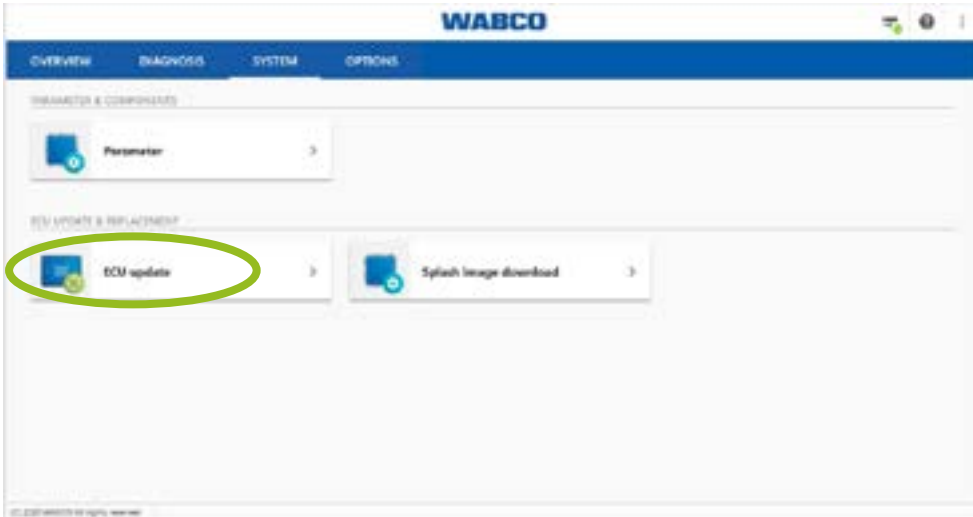

5. Click on "READ FROM FILE" and select the downloaded file:



SERVICE INFORMATION


Doc_000138_en

11.04.2023

6. Click on "WRITE TO ECU":



7. After the process is completed, click „OK“:

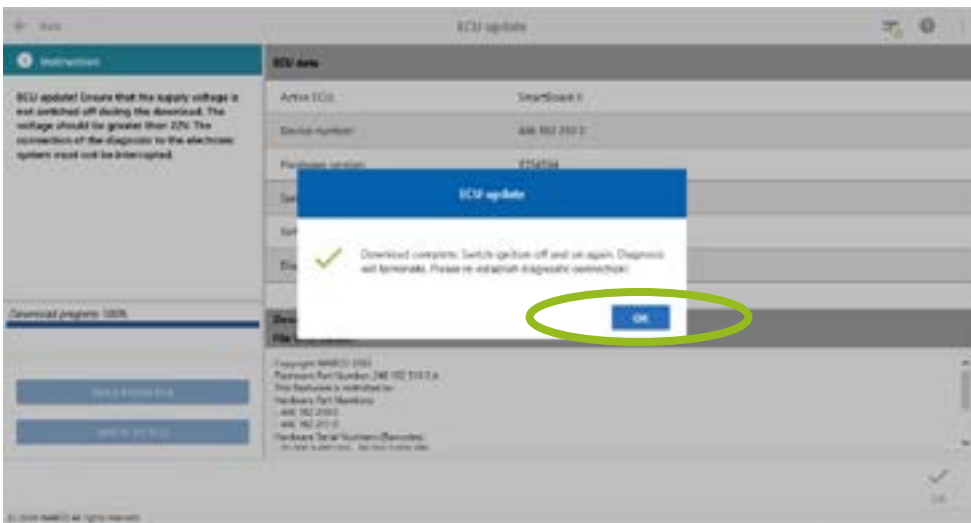

8. Switch ignition off and on again.
9. Re-establish diagnostic connection.
⇒ The update is finished.



An update via the TEBS E diagnostic software is also possible and requires your TEBS E PIN 2.