



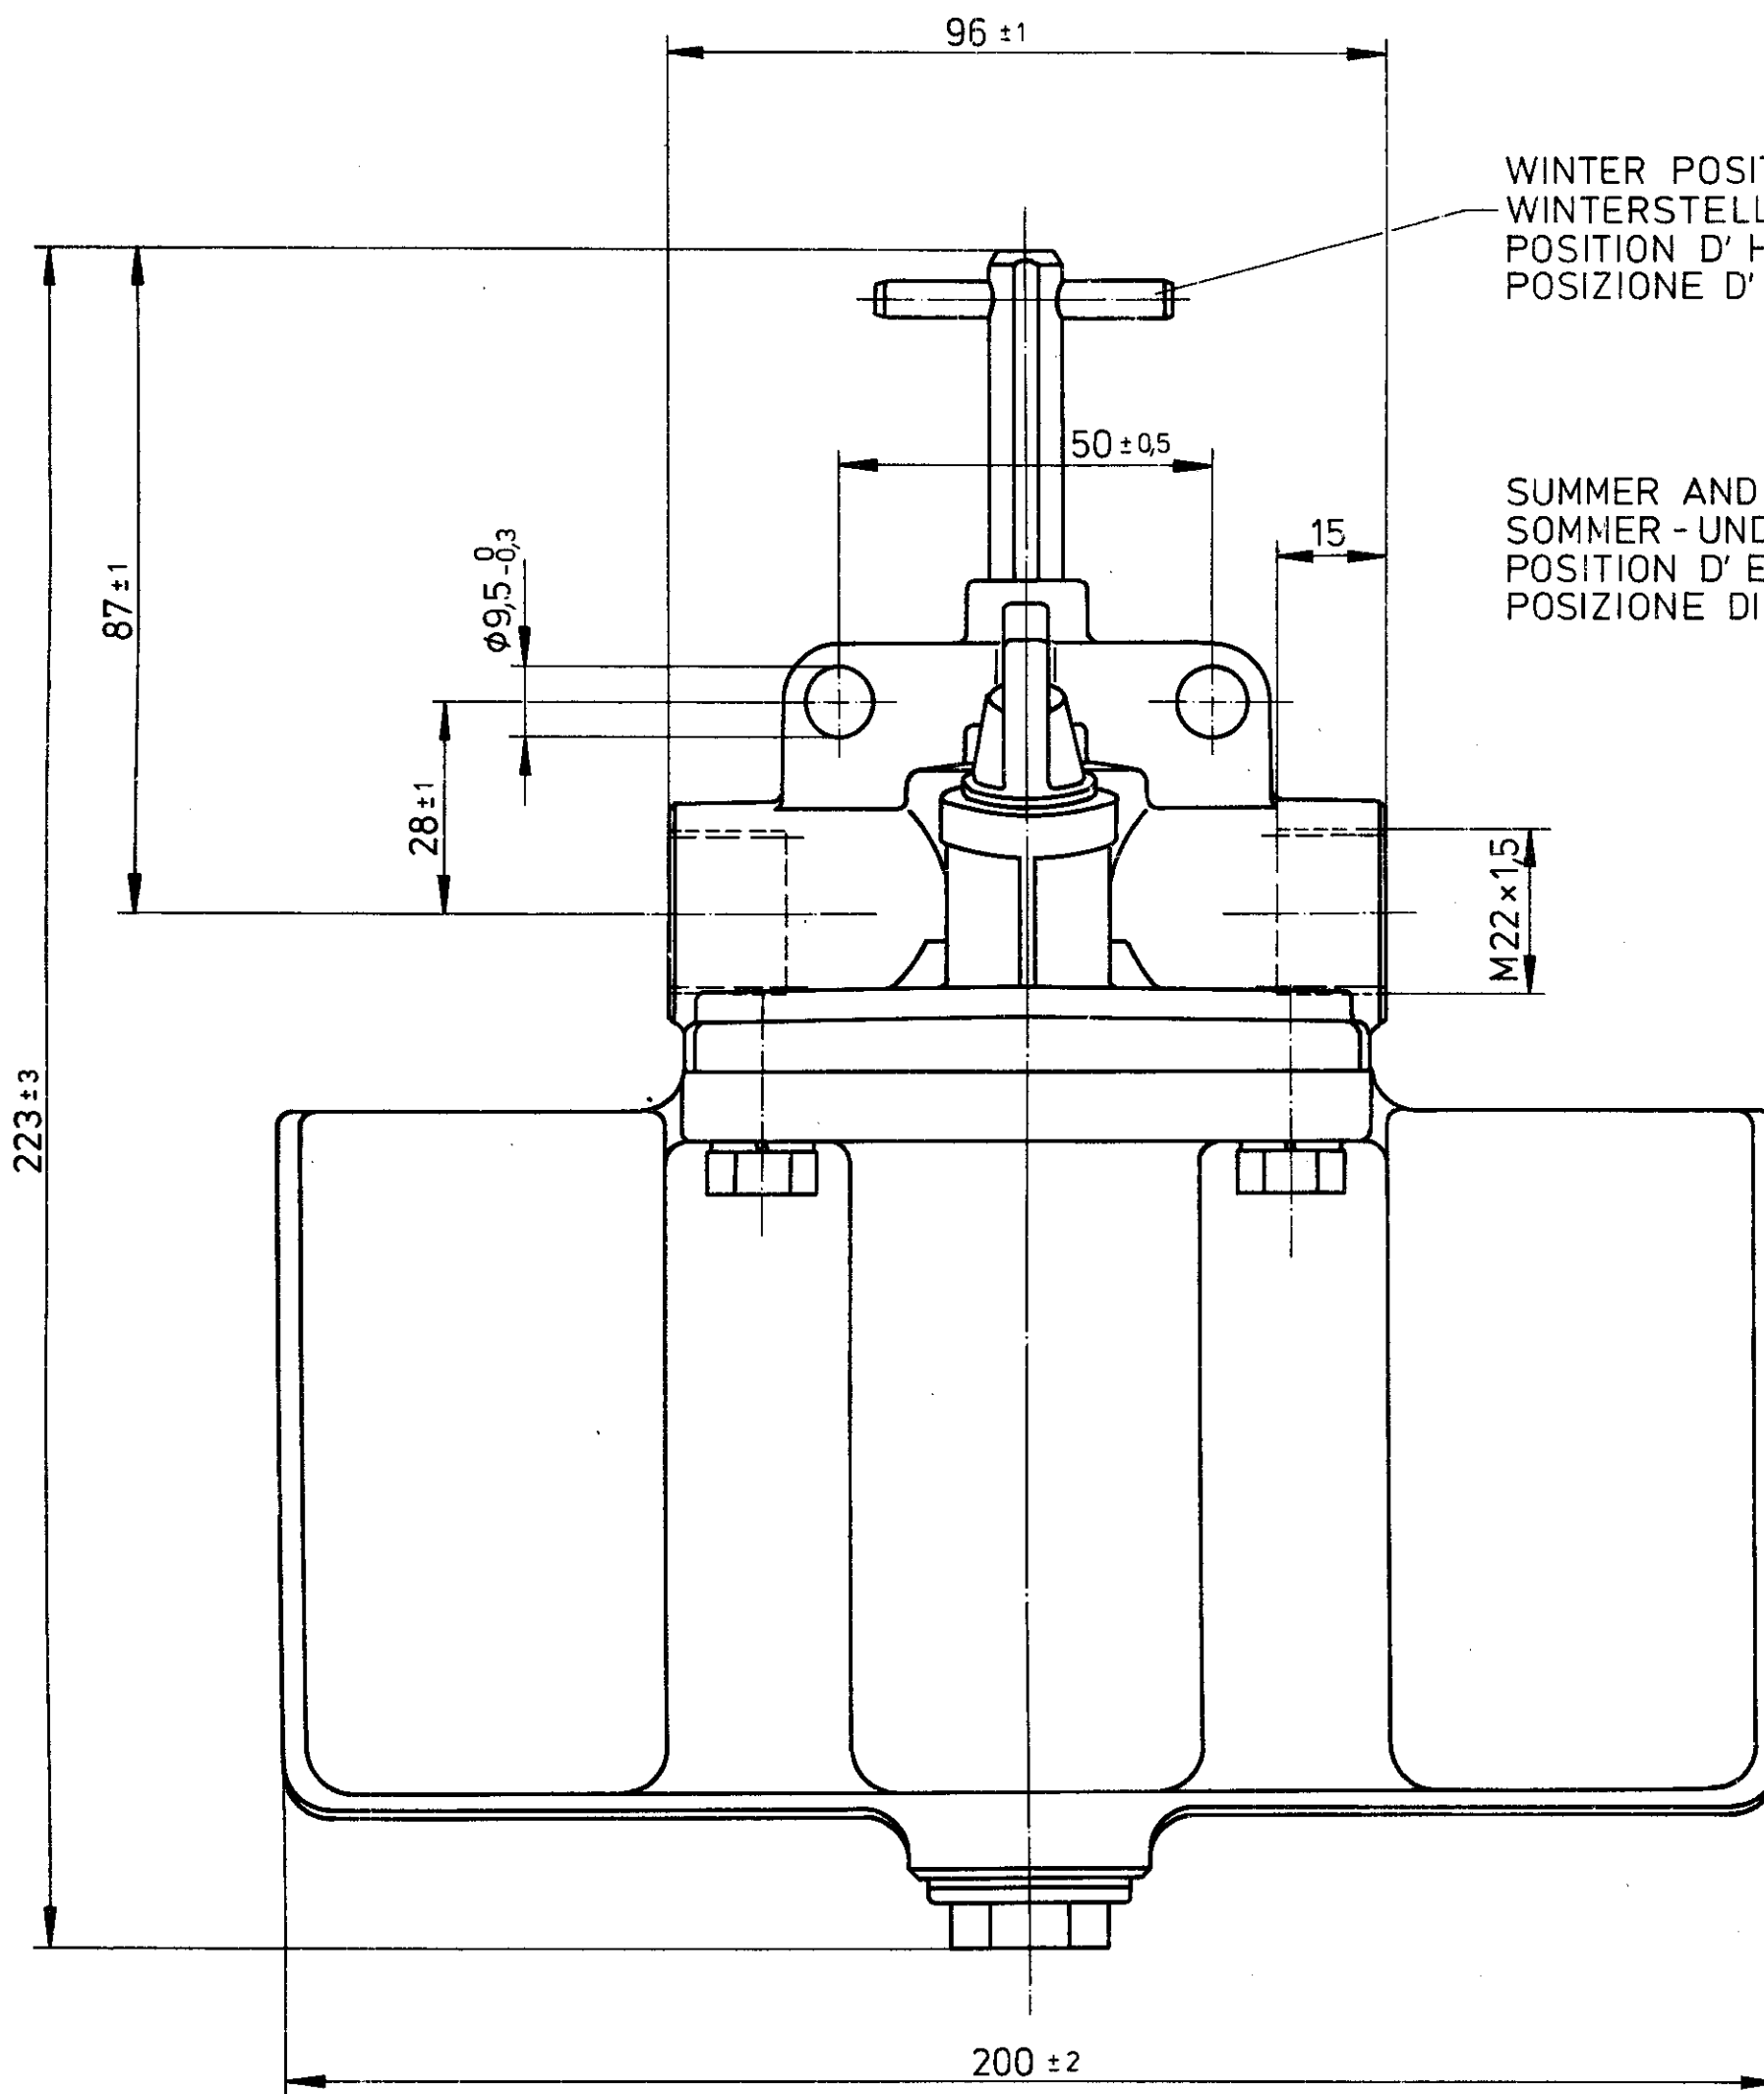


WINTER POSITION
WINTERSTELLUNG
POSITION D'HUIVER
POSIZIONE D'INVERNO

SUMMER AND REPLENISHING POSITION
SOMMER - UND NACHFUELLSTELLUNG
POSITION D'ETE ET DE REMPLISSAGE
POSIZIONE DI ESTATE E DI CARICO

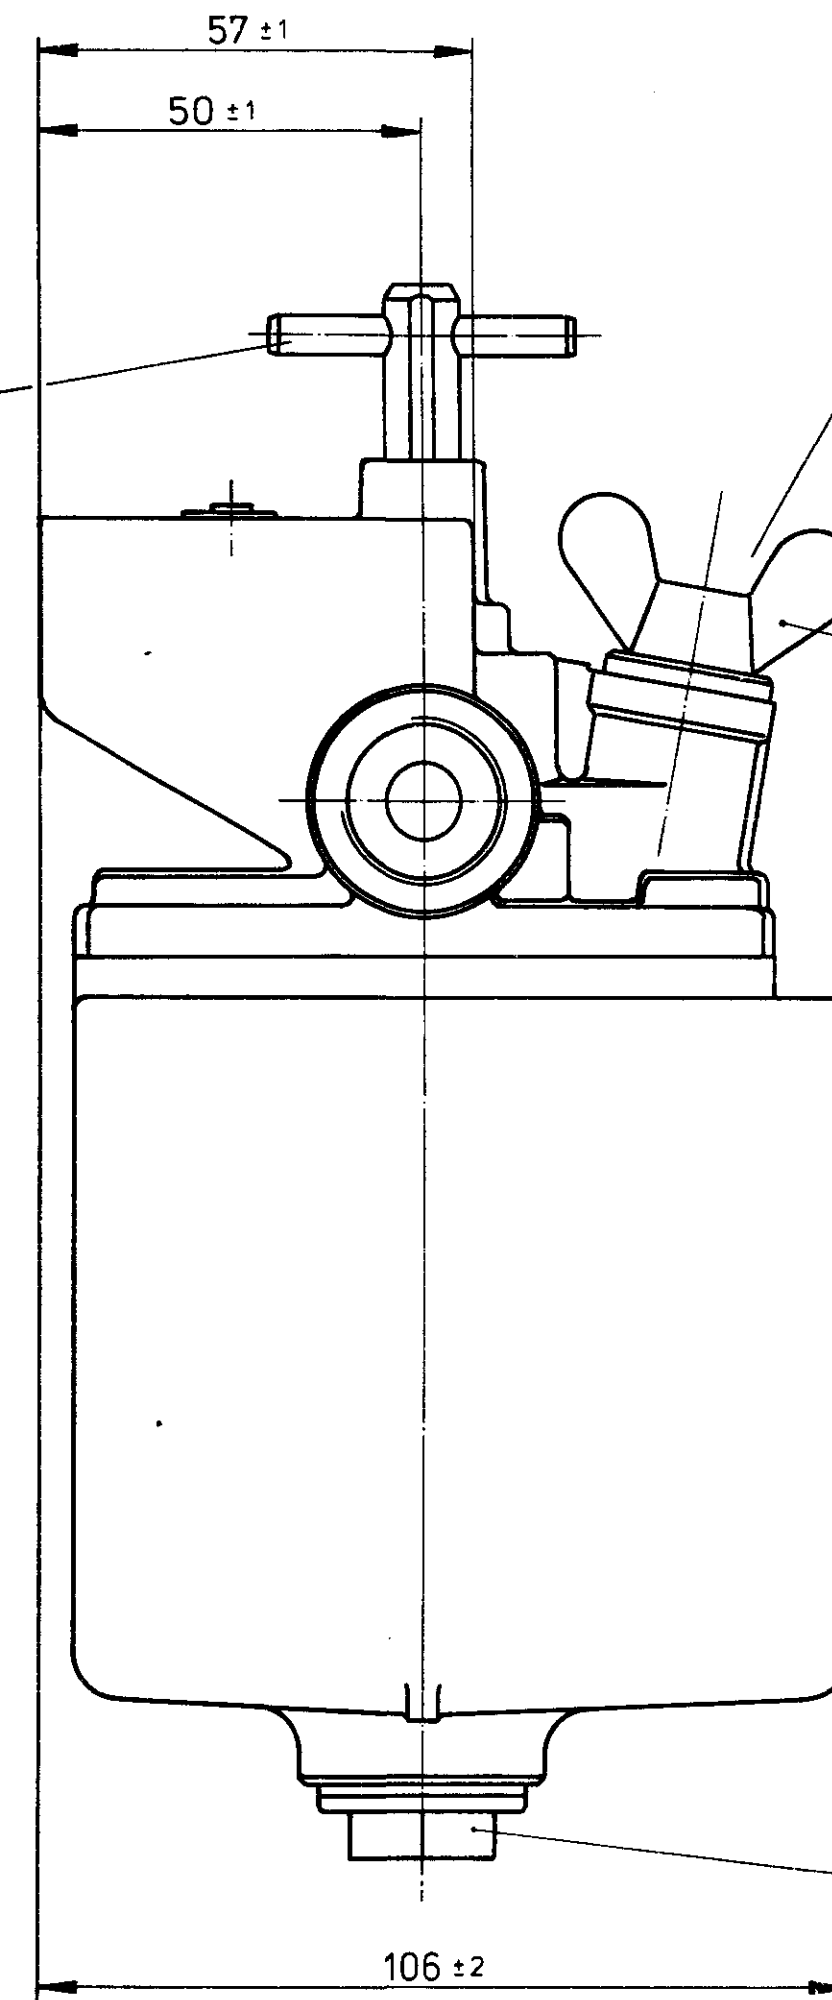

FILLING PORT
EINFUELLOEFFNUNG
ORIFICE DE REMPLISSAGE
ORIFIZIO DI RIEMPIMENTO

DICK STIP
MESSSTAB
JAUGE
ASTA LIVELLE

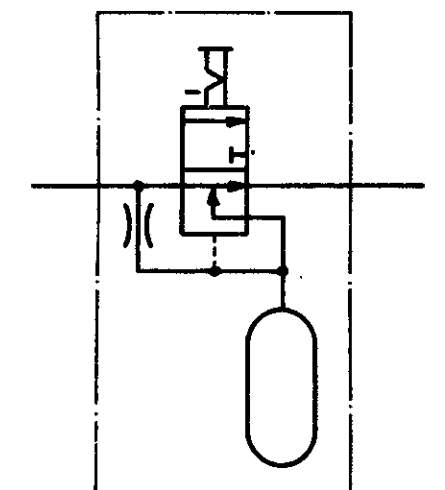

ISO 1219

DRAIN SCREW
ABLASSSCHRAUBE SW19
BOUCHON DI VIDANGE
TAPPO DI SPURGO

WORKING PRESSURE
BETRIEBSDRUCK
PRESSION D'UTILISATION
PRESSIONE DI ESERCIZIO

MAX. 20 bar

RESERVOIR CAPACITY
BEHAELTERINHALT
CAPACITE DU RESERVOIR
CAPACITA DI SERBATOIO

≈ 1,1 dm³

THERMAL RANGE OF APPLICATION
THERMISCHER ANWENDUNGSBEREICH
GAMME D'APPLICATION THERMIQUE
CAMPO DI APPLICAZIONE TERMICA

-40°C +80°C

REPLENISH ONLY WITH:
NACHFUELLEN NUR MIT:
NE REMPLIR QU AVEC:
CARICARE SOLO CON:

ETHYL ALCOHOL OR ETHANOL (FUEL ALCOHOL)
AETHYLALKOHOL BZW. AETHANOL (BRENNSPIRITUS)
ETHYL ALCOOL OU ETHANOL (ALCOOL A BRULER)
ALCOLE ETILICO O ETANOLO (ALCOLE DA ARDERE)

DATE		SIGNATURE		WABCO WESTINGHOUSE	
1979-05-21		Seewald		ANTI-FREEZER	
CHECKED		Hanselow		PROTECTEUR ANTIGEL	
STANDARDIZATION		Hanselow		ANTICONGELATORE	
MASS		SCALE		IDENTIFICATION CODE	
≈ 1,8 kg		1:1		432 199 040 0	
CHANGE NO.		DATE		SHEET	
REPLACEMENT FOR		SIZE		1/1	
432 199 020 0		A2		140	
CODE FOR FUNCTION		CODE FOR SHAPE		CODE FOR DOCUMENT	
605		605		605	