
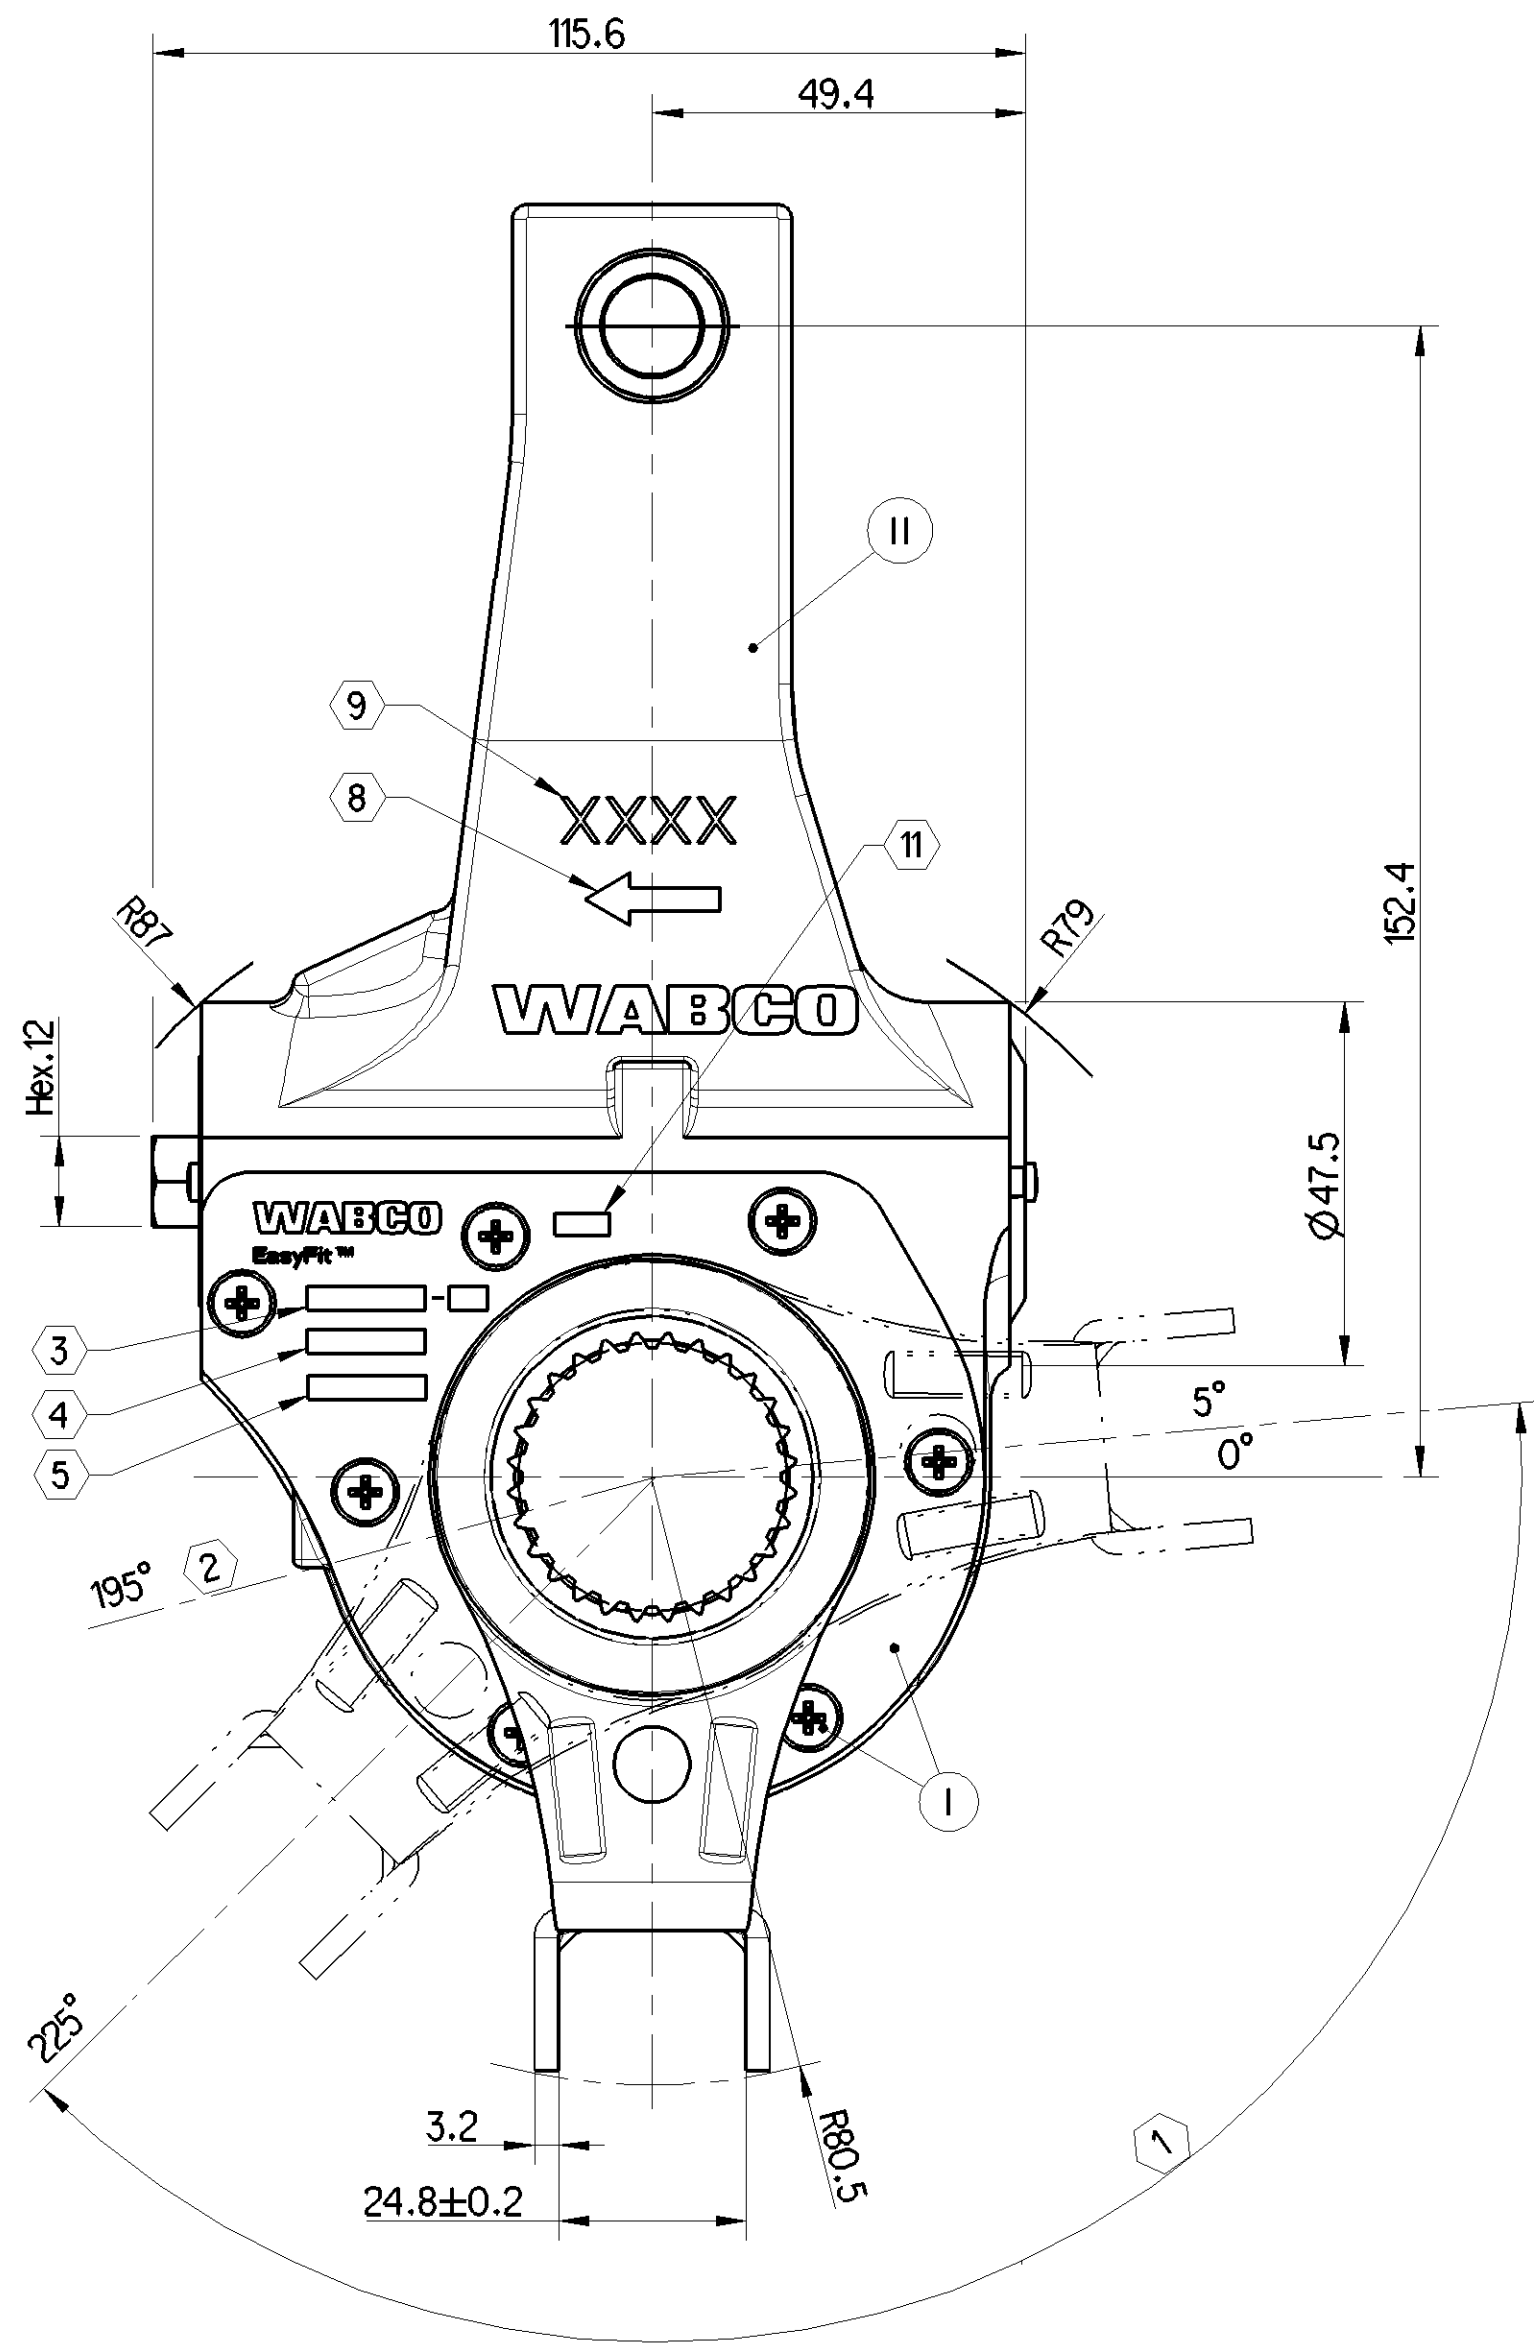



Non è permesso copiare, a fini di riproduzione, questo documento, né utilizzare il contenuto a renderlo comunque noto a terzi.
Toute réimpression ou reproduction de ce document, toute exploitation ou communication de son contenu sans autorisation écrite de WABCO sont formellement interdites.
Es ist nicht gestattet, dieses Dokument zu kopieren oder dessen Inhalt zu verbreiten. Nachdruck, Vervielfältigung und Verbreitung, auch auszugsweise, ist ohne schriftliche Genehmigung der WABCO AG.
All rights reserved. No part of this document may be reproduced or transmitted in any form or by any means electronic or mechanical, including photocopying and recording, or by any information storage or retrieval system, without permission in writing from WABCO.

Tous droits de propriété intellectuelle réservés. Toute réimpression, reproduction ou utilisation non autorisée sans la permission écrite de la WABCO est formellement interdite.
Alle Rechte für den Fall der Patentierung oder Gebrauchsmuster-Eintragung vorbehalten.


PART CODE	MATERIAL	SURFACE PROTECTION
I	STEEL	ZINC PLATED
II	CAST IRON	POWDER COATED

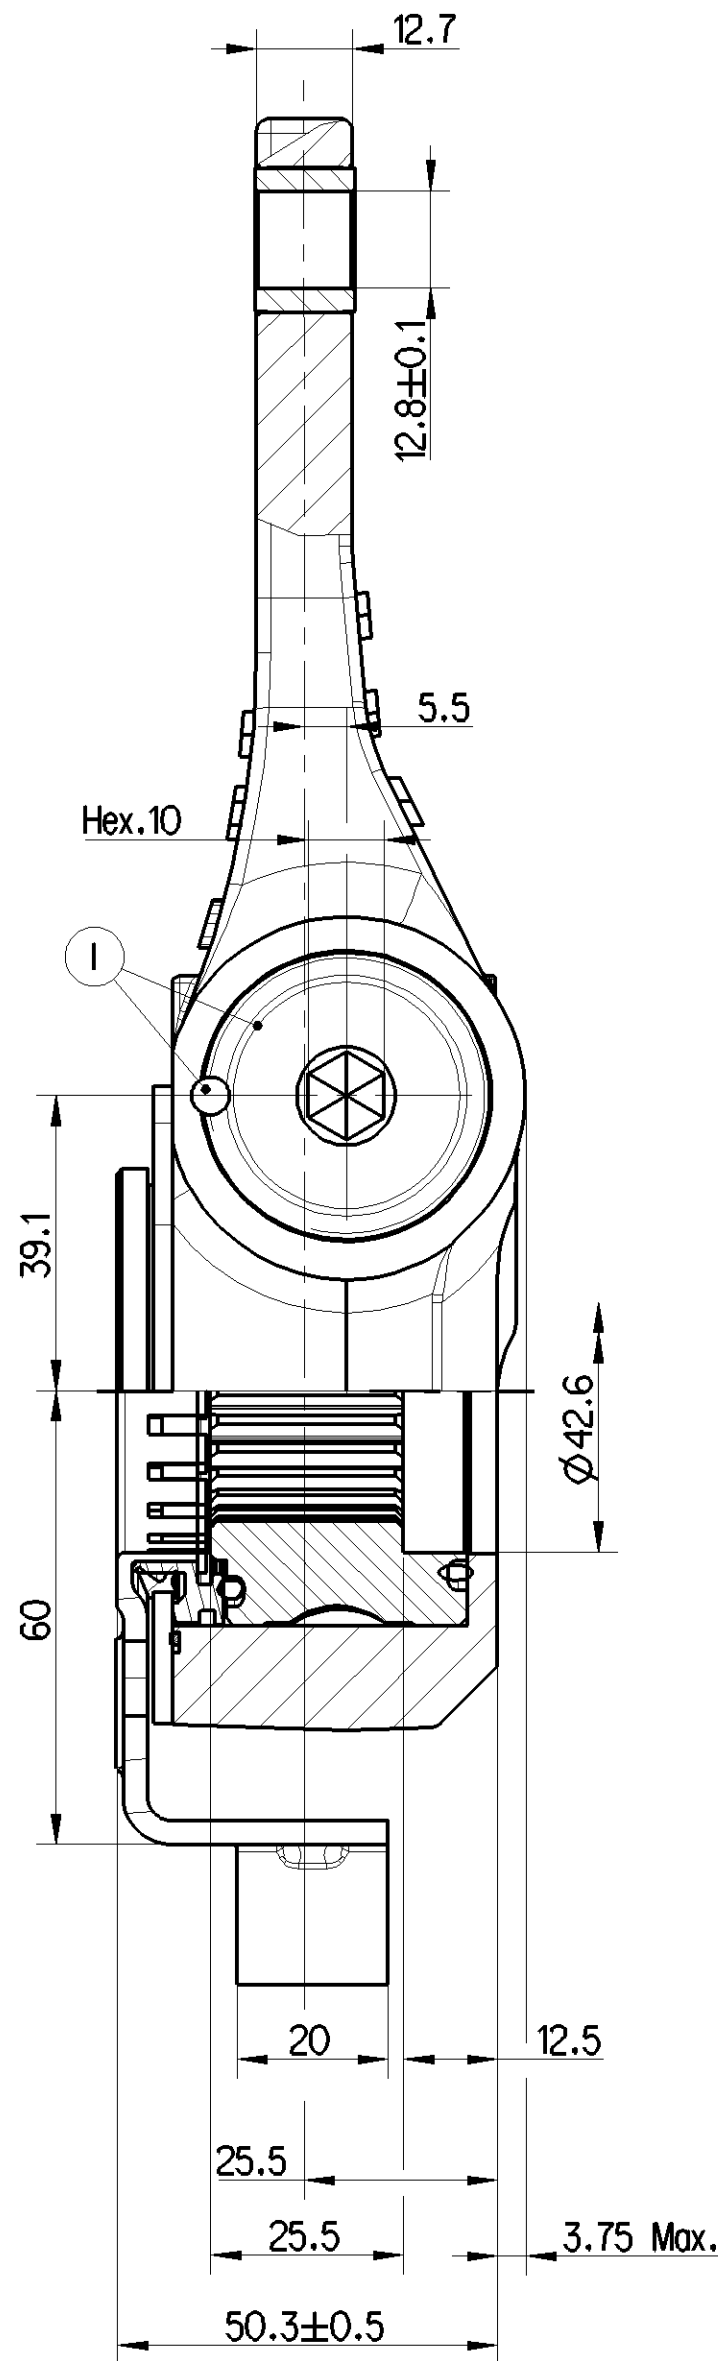

- 1 PERMISSIBLE INSTALLATION AREA
- 2 MAXIMUM ANGLE AT FULL CYLINDER STROKE
- 3 PART NUMBER - REVISION LEVEL (4332251040 - A)
- 4 BATCH NUMBER
- 5 SERIAL NUMBER
- 6 INTERNAL SPLINE :
SPLINE STANDARD : ANSI B92.1, TOLERANCE CLASS 6
NUMBER OF TEETH : 28
PRESSURE ANGLE : 37.5°
SPLINE PITCH : 20/40

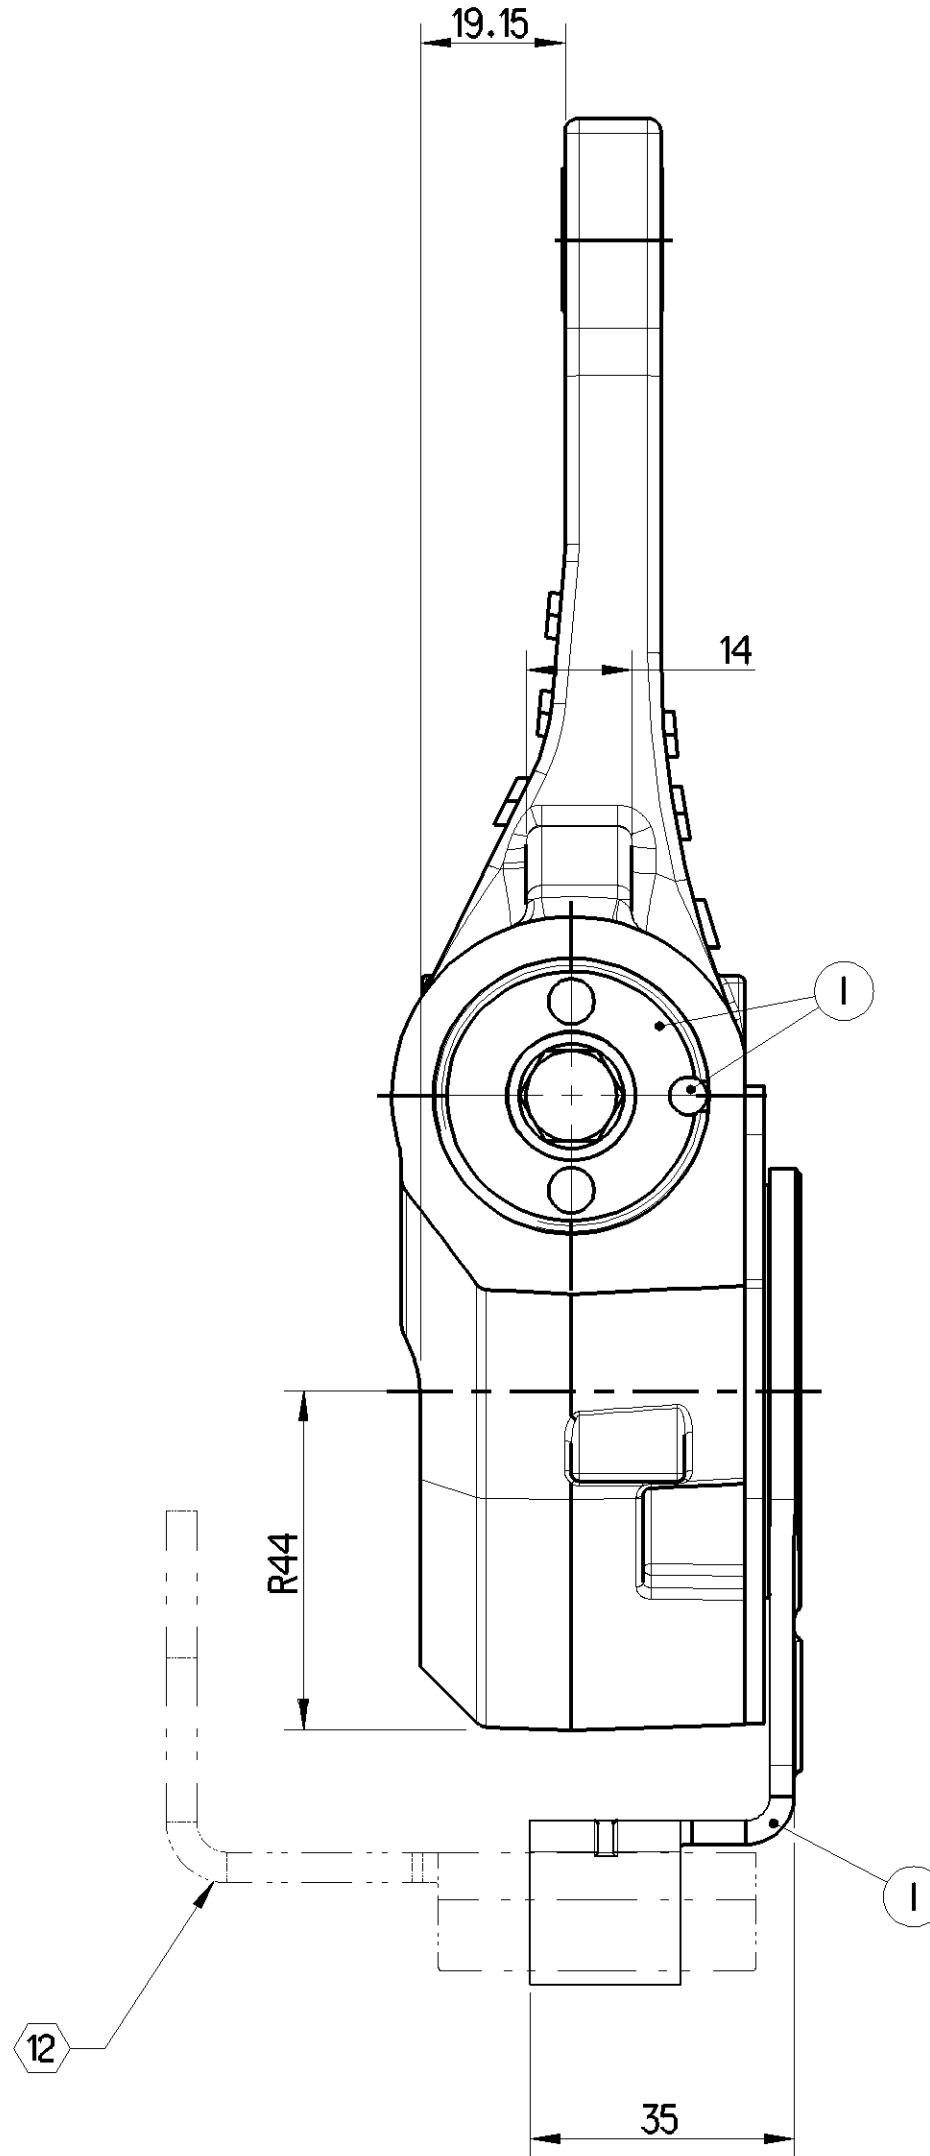

- 7 PRODUCT SPECIFICATION 4332250000
- 8 WORKING DIRECTION (DIRECTION OF ACTUATING FORCE)
- 9 LOCATION FOR BODY SUPPLIER CODE / HEAT CODE
- 10 BODY NUMBER "43390 70206"
- 11 PRODUCTION RESPONSIBILITY INDICATION
- 12 ANCHOR BRACKET (433 225 050 4) TO MOUNT CONTROL ARM, SUPPLIED WITH ASA AS A LOOSE PART

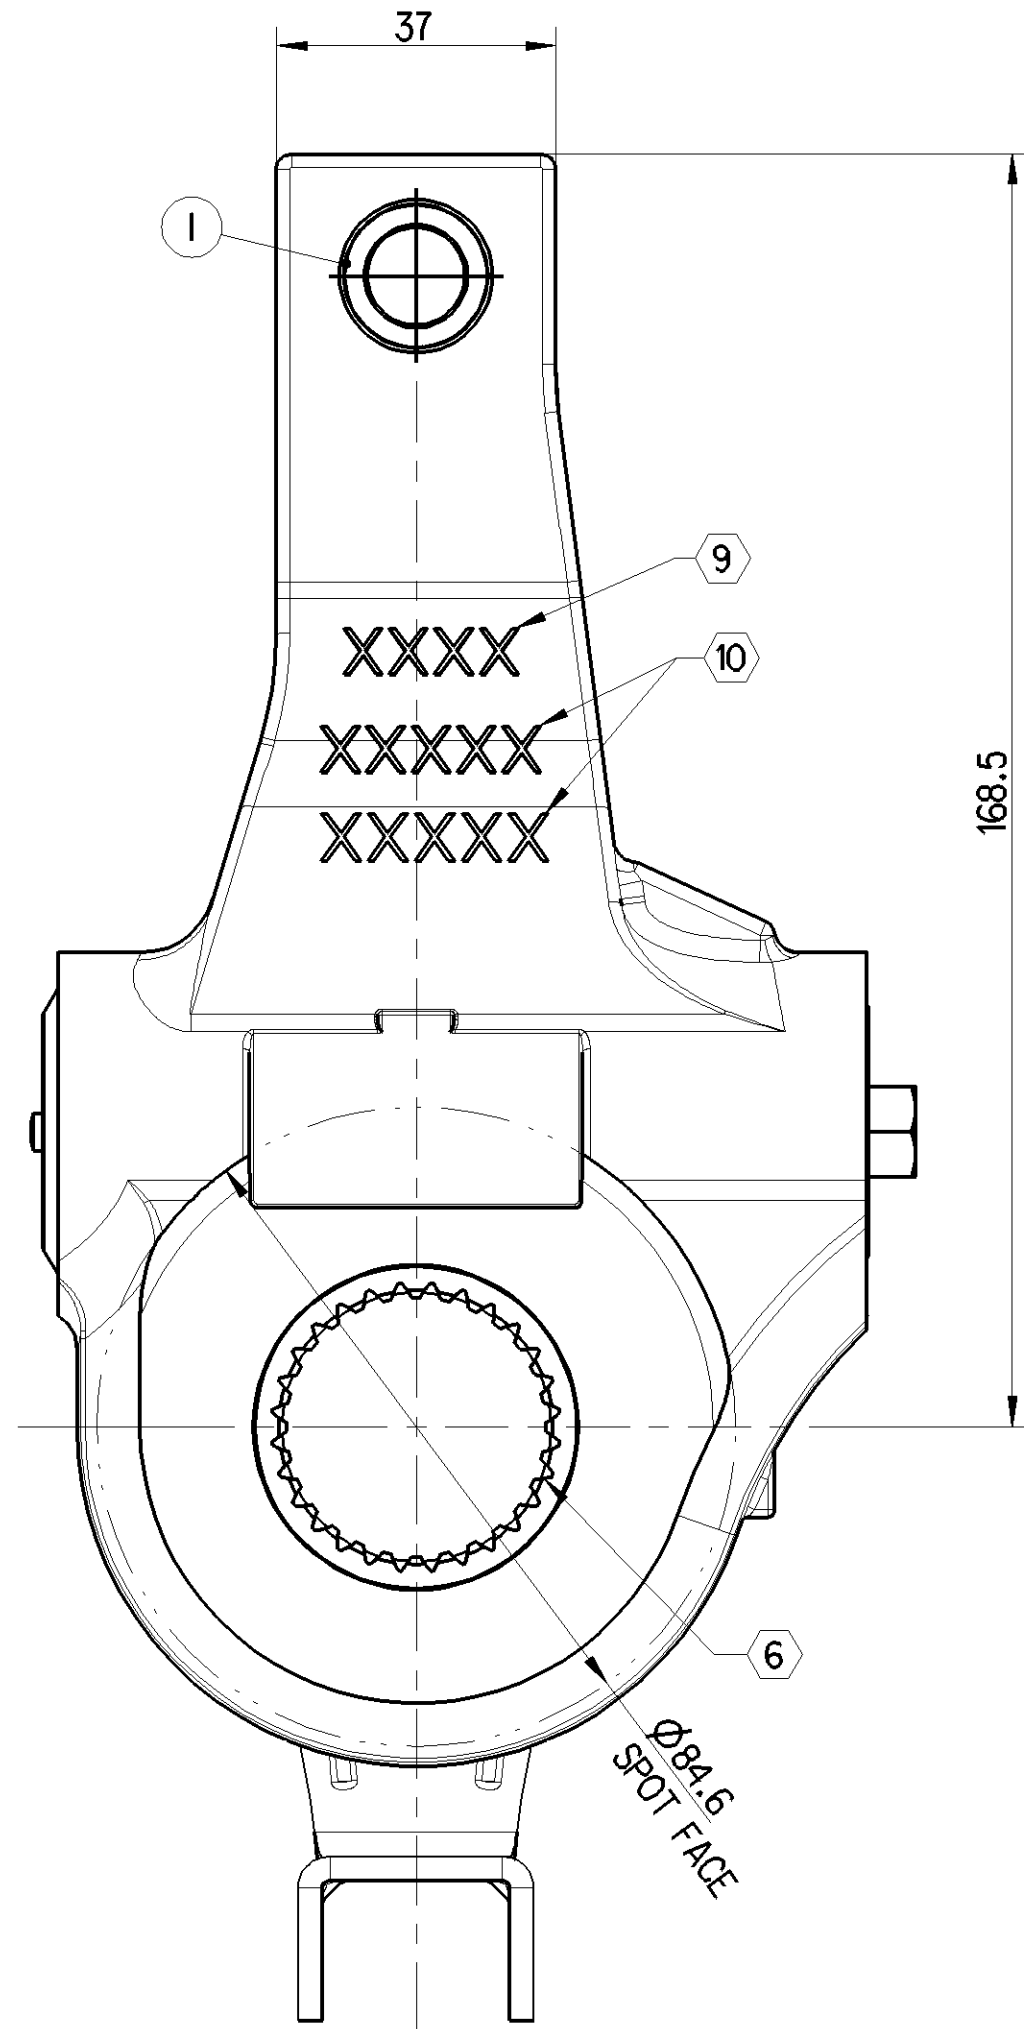

WEIGHT	3 Kg APPROX
THE UNIT IS TO BE INSTALLED SUCH THAT THE DIRECTION OF ACTUATING FORCE IS ALWAYS AS INDICATED BY THE ARROW	
AUTOMATIC SLACK ADJUSTER IS GREASED FOR LIFE TIME	
AUTOMATIC SLACK ADJUSTER WILL MEET ALL TEST REQUIREMENTS AS PER SAE J1462	

General Specification: ISO 9015, JED-334-1, Size ISO 14405 LP		Copyright WABCO®		WABCO	
Further Technical Data:		Date	Drawn	Signature	
Doc. Code		Sheet	To	2022-07-25	
General Tolerances JED-261		Checked		Revankor	
Range of nominal dimensions in mm		Checked		Paranjithi	
Class	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400
Fine		±0.5	±1	±1.5	±2
Medium	X	±1	±2	±3	±4
Coarse		±2	±3.5	±5	±6.5
Tapped Holes acc.		Dimensions in mm		Material No.	
1) Tolerance Class Applied Crossmarked		Mass	Scale	Date of first issue	
		2.973	1:1	2026-11-11	
		Size	CAD System	Doc.Code Language Sheet	
		A 1	CREO	433 225 104 0	
		EDM-No.	Revision	Tech. Resp.	
		506263	1 A	5460	
		Replacement for		-	