
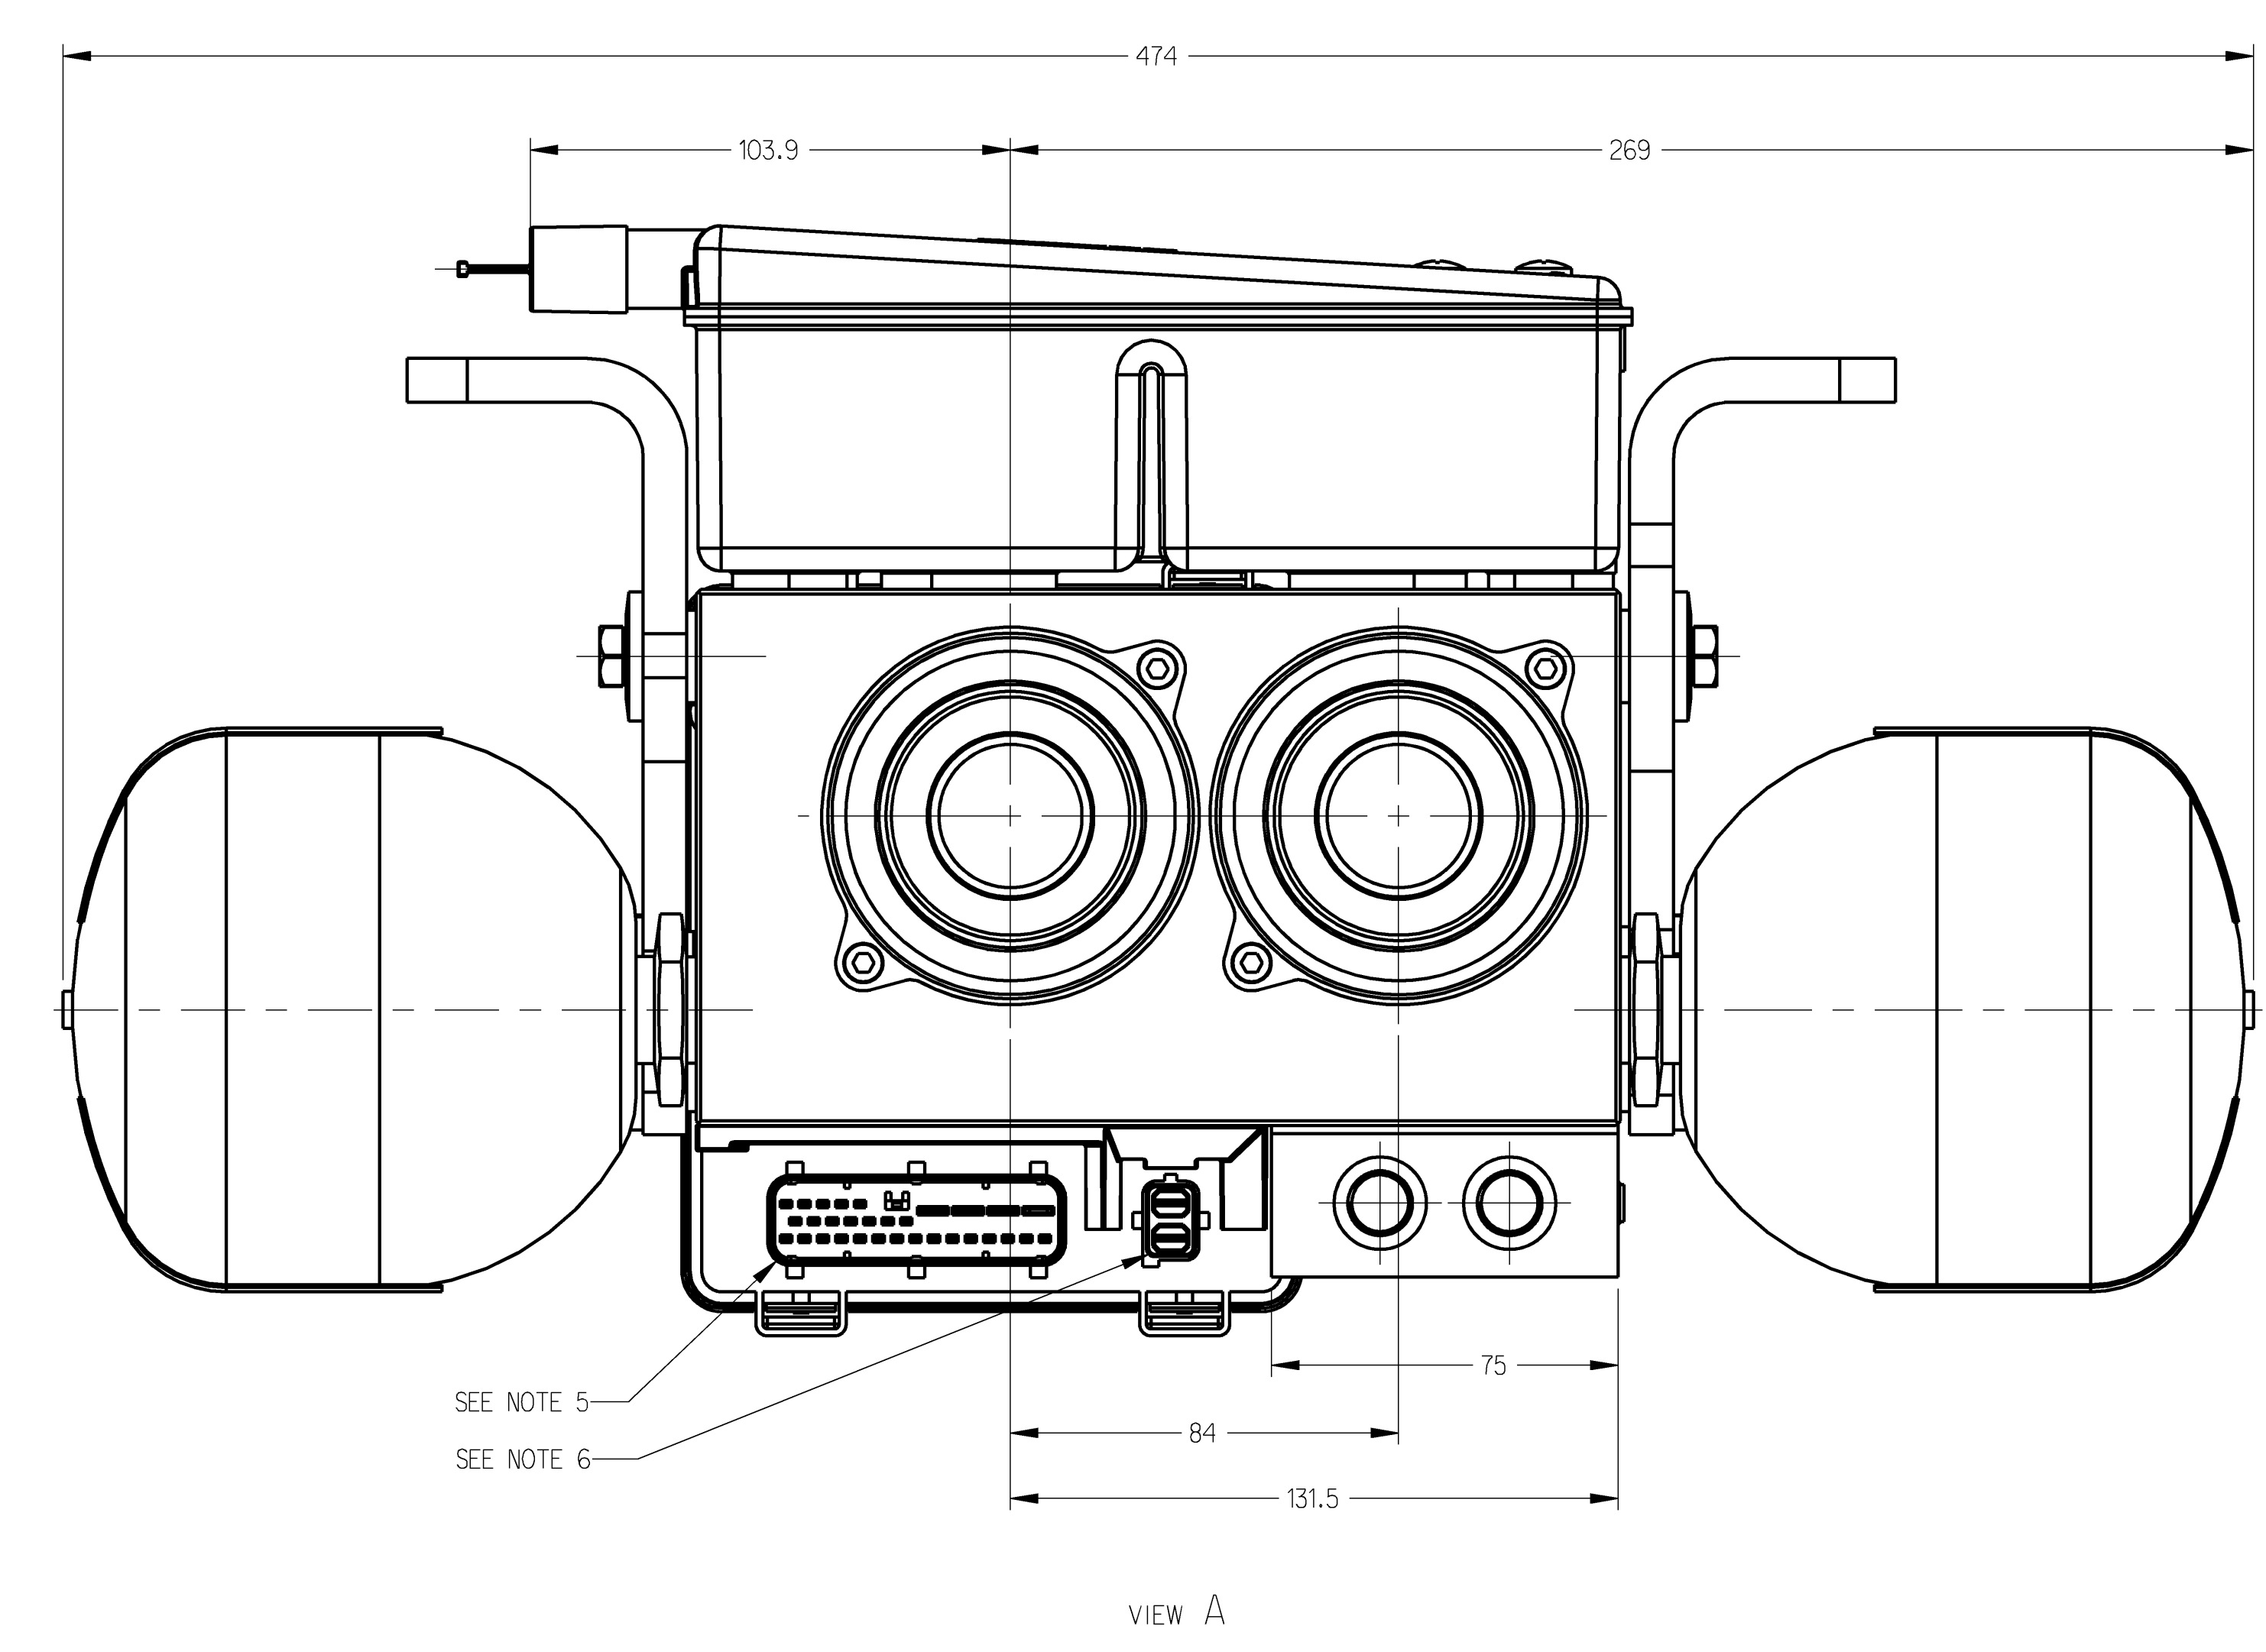
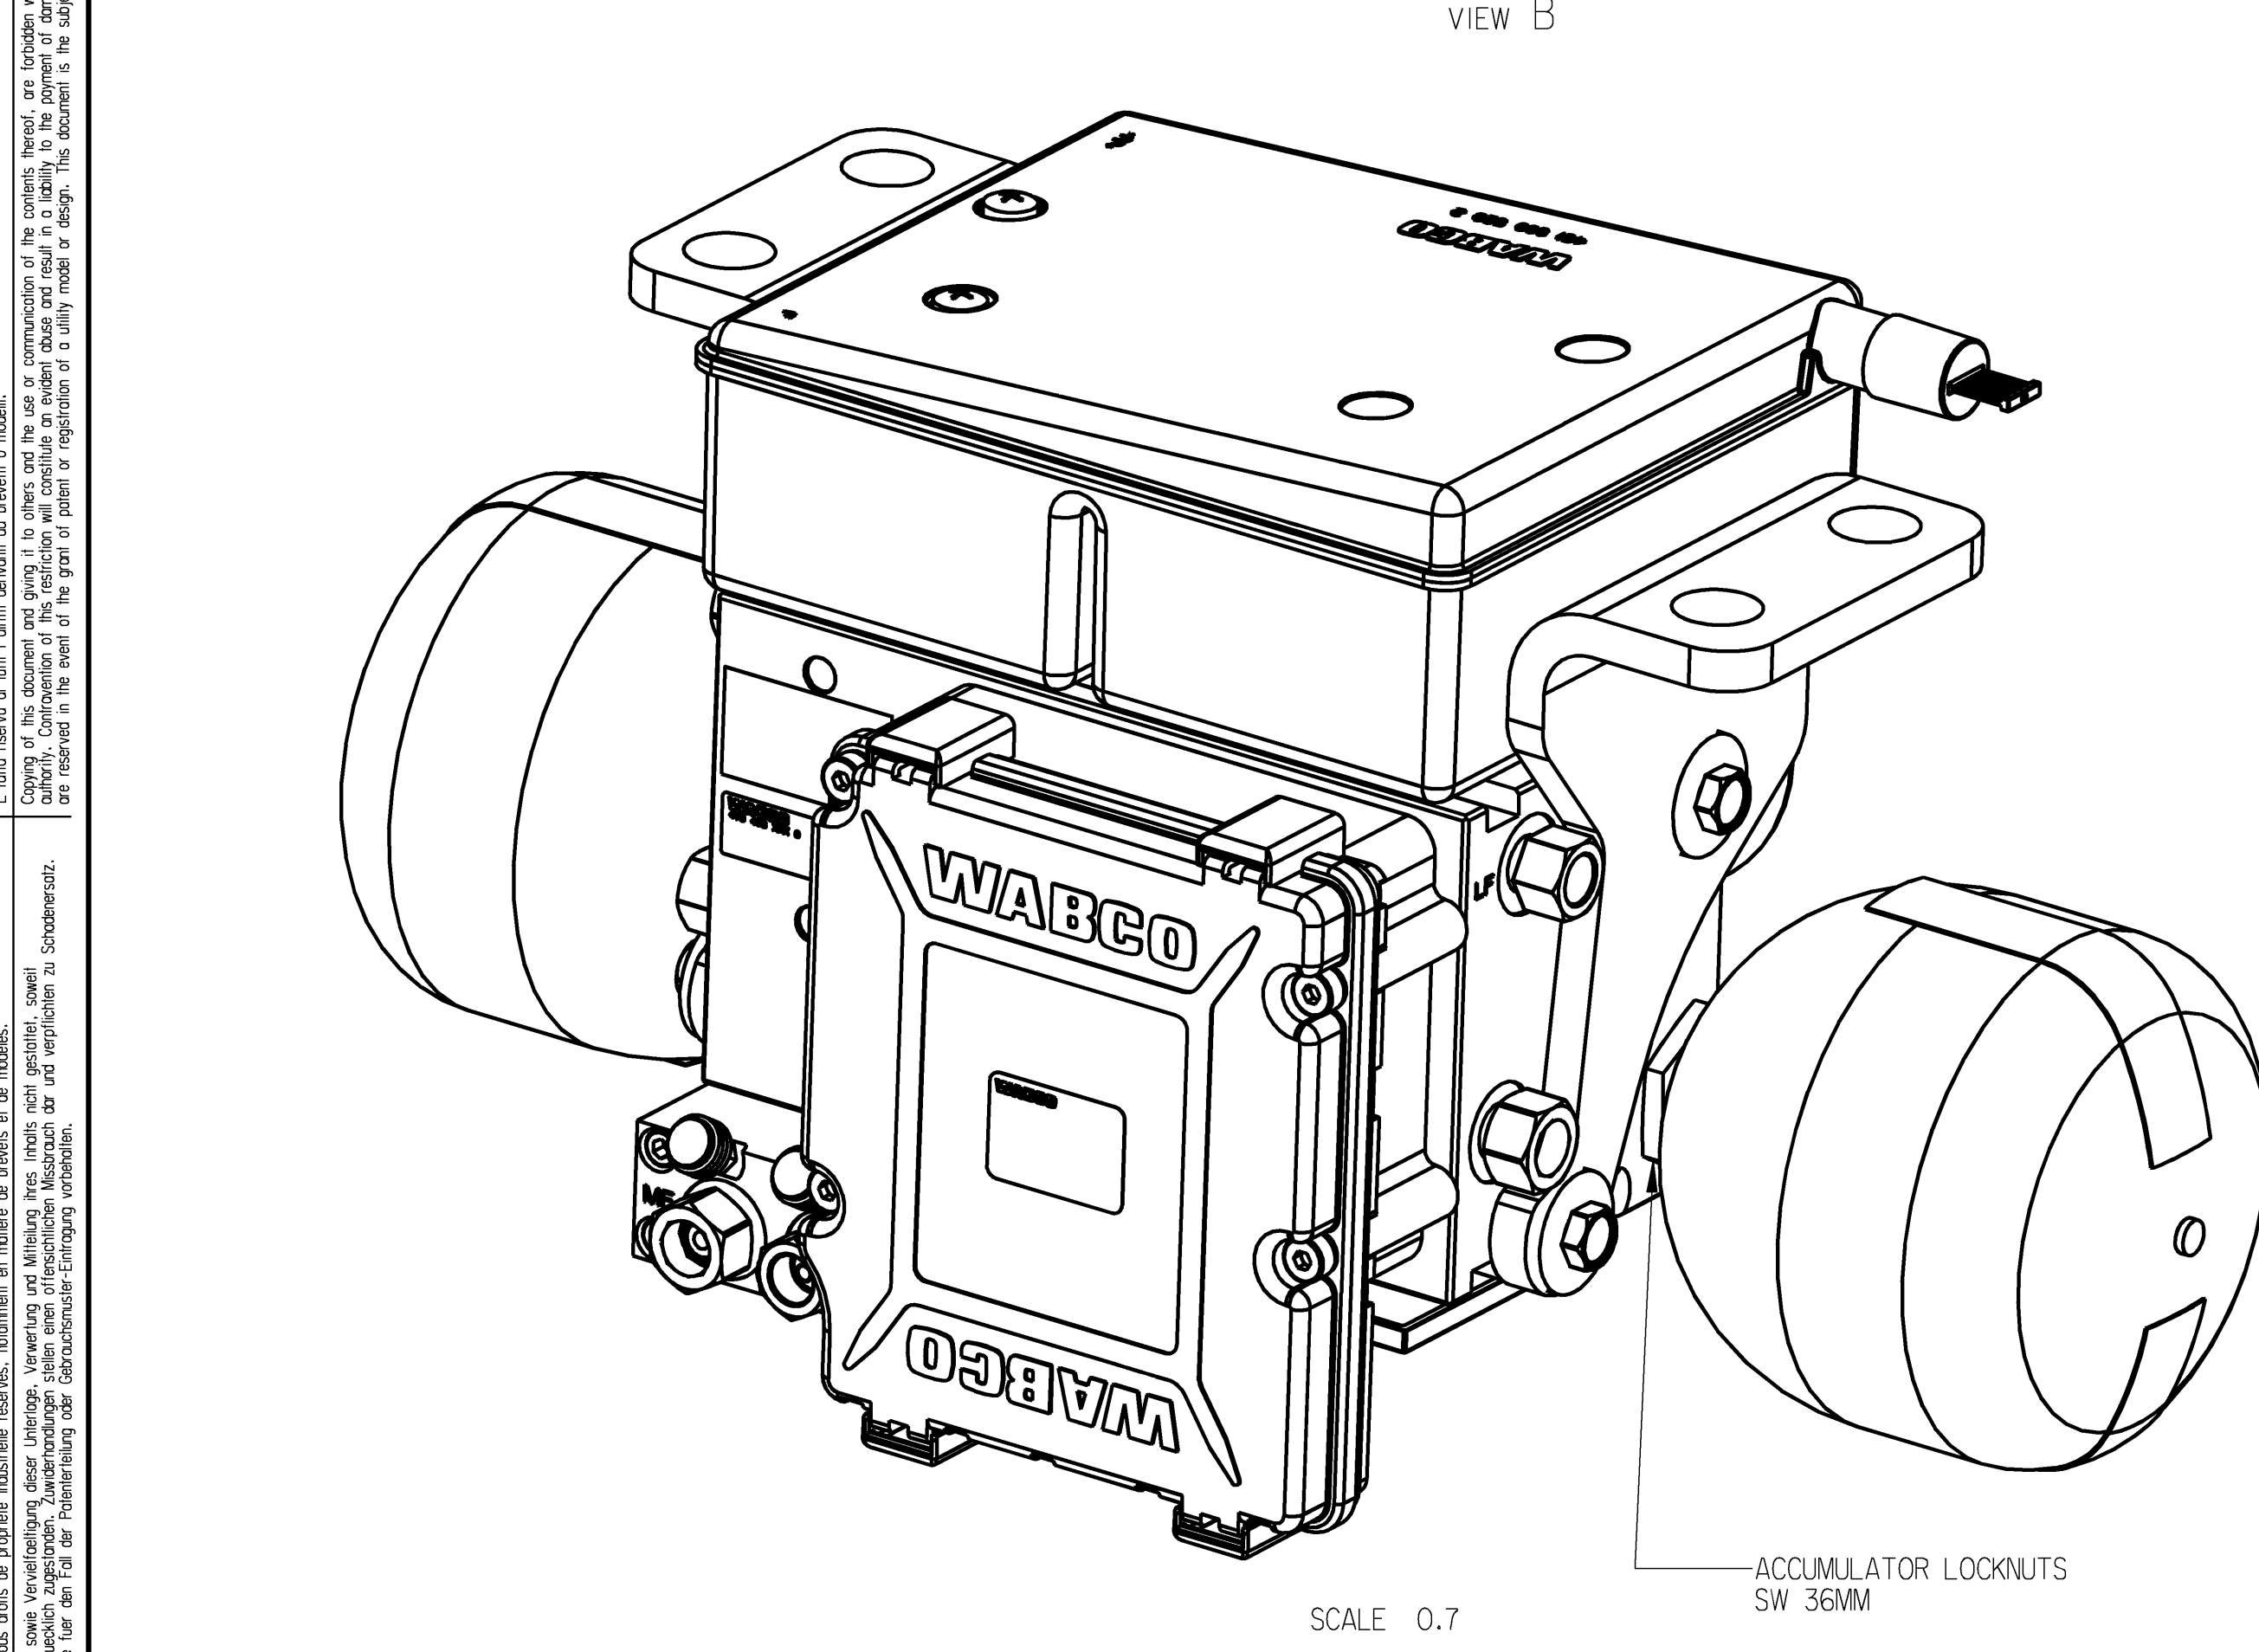
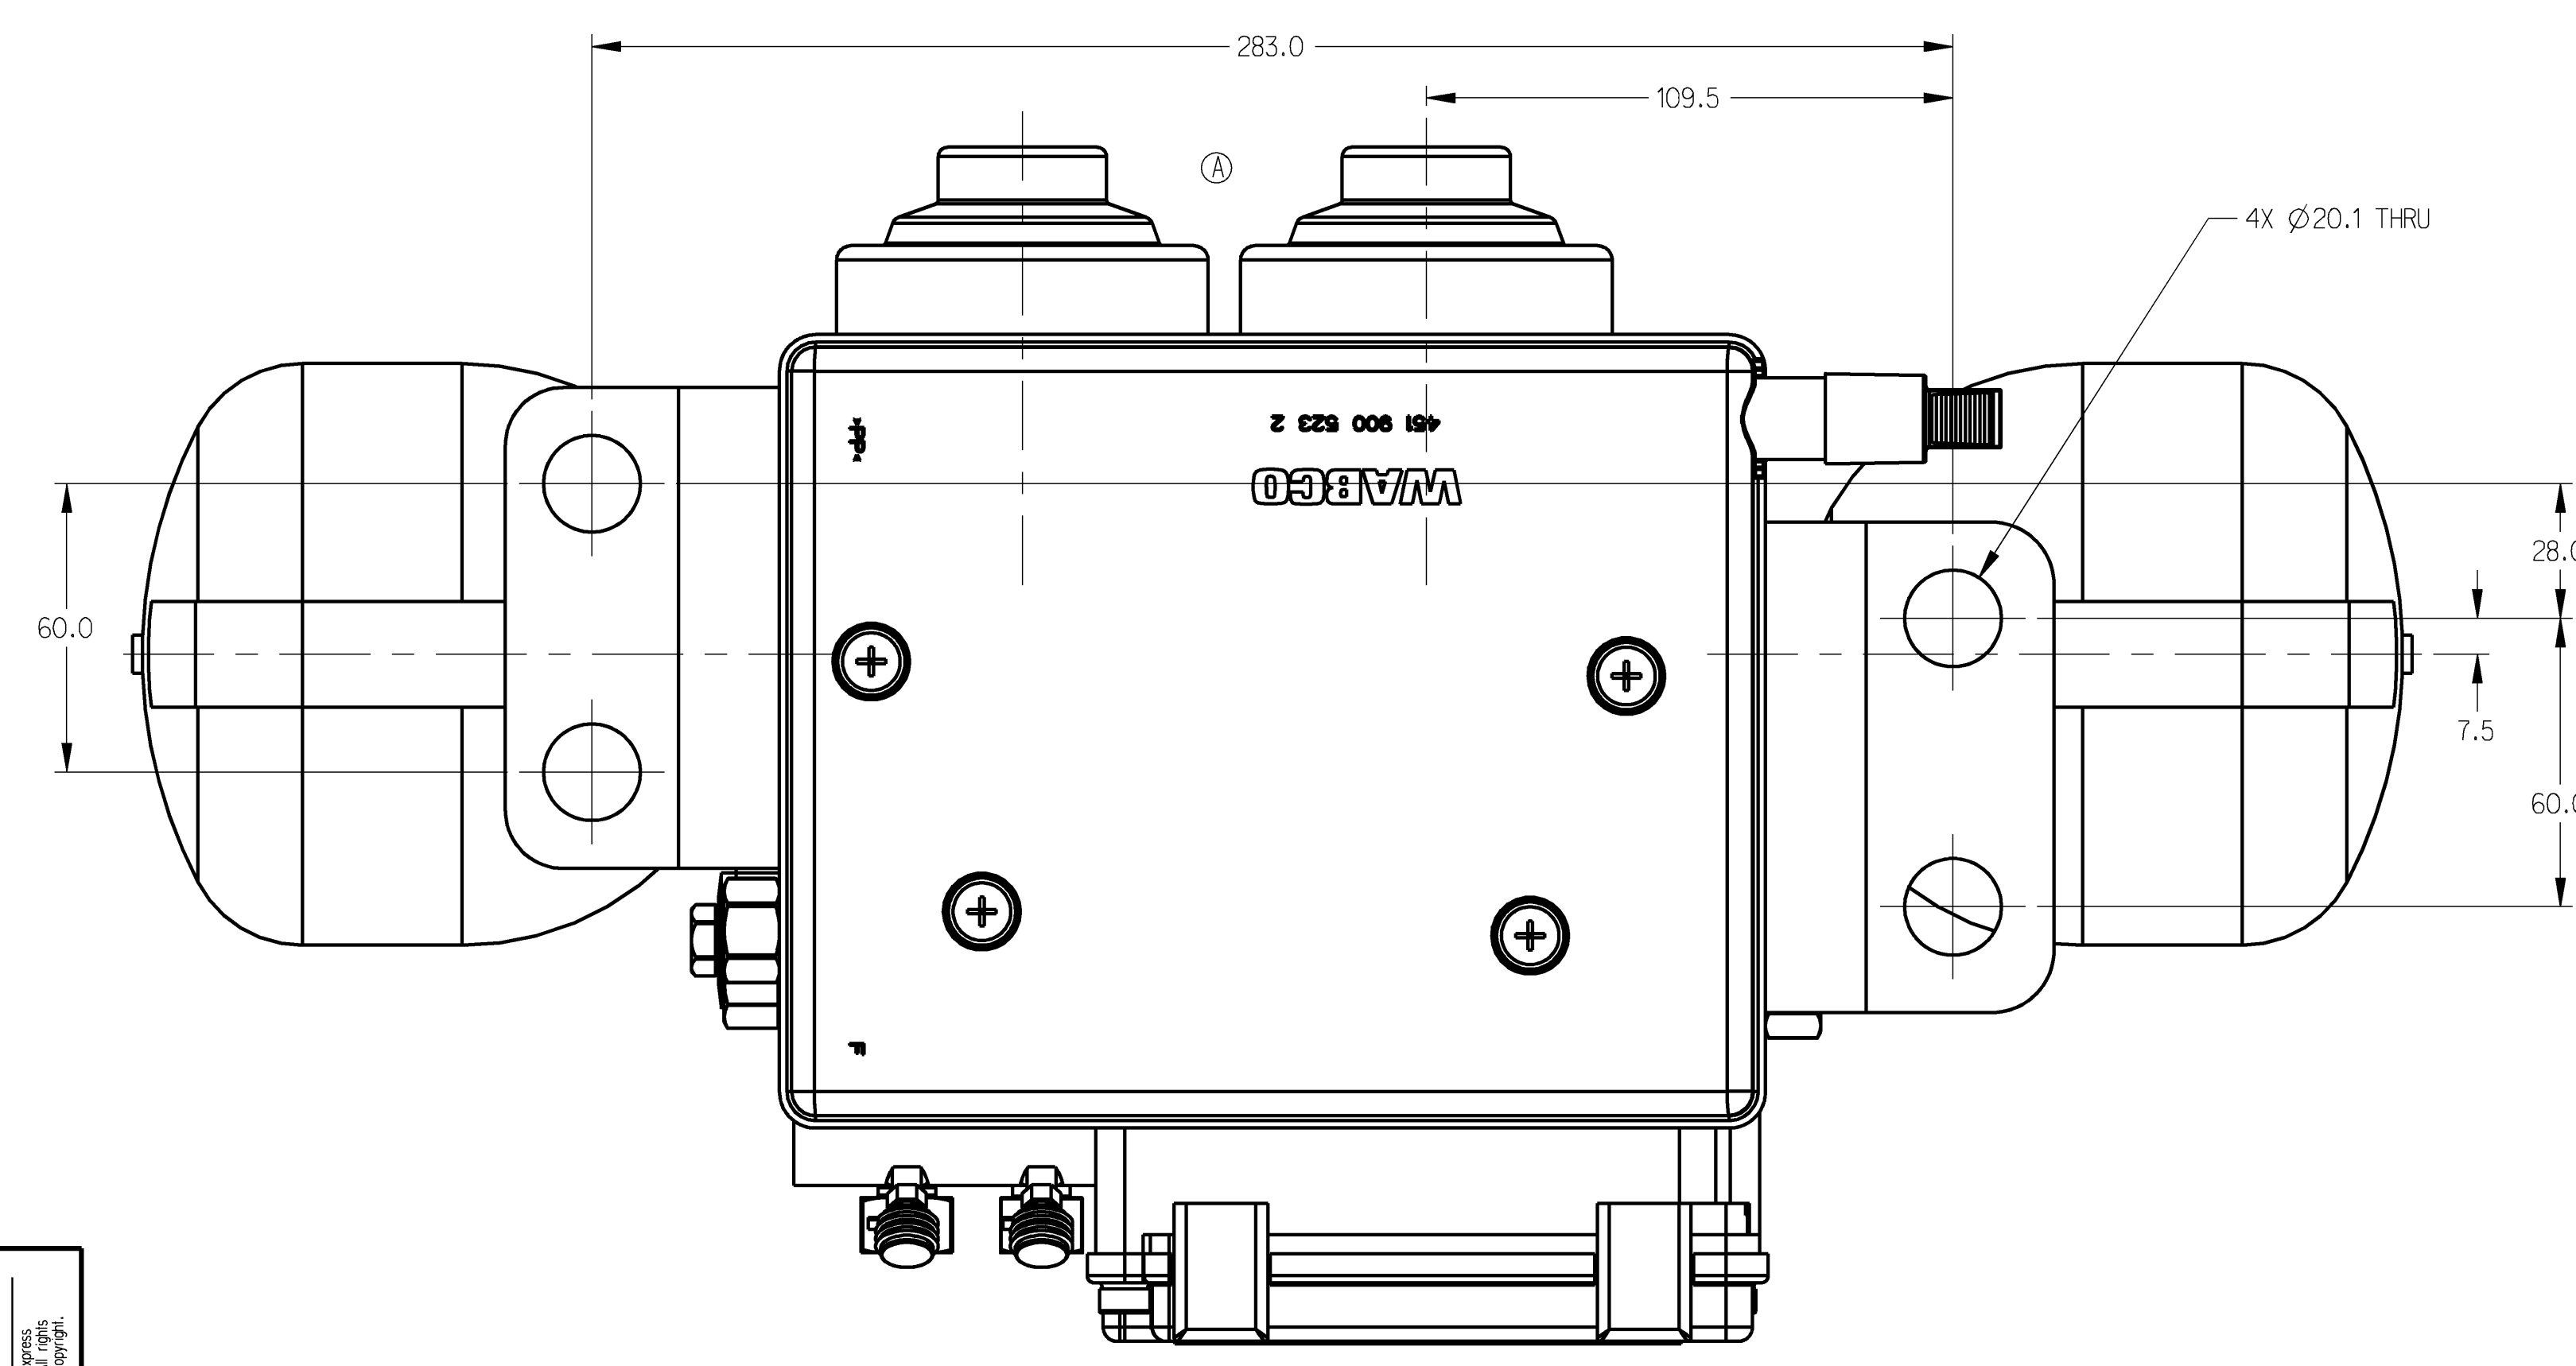


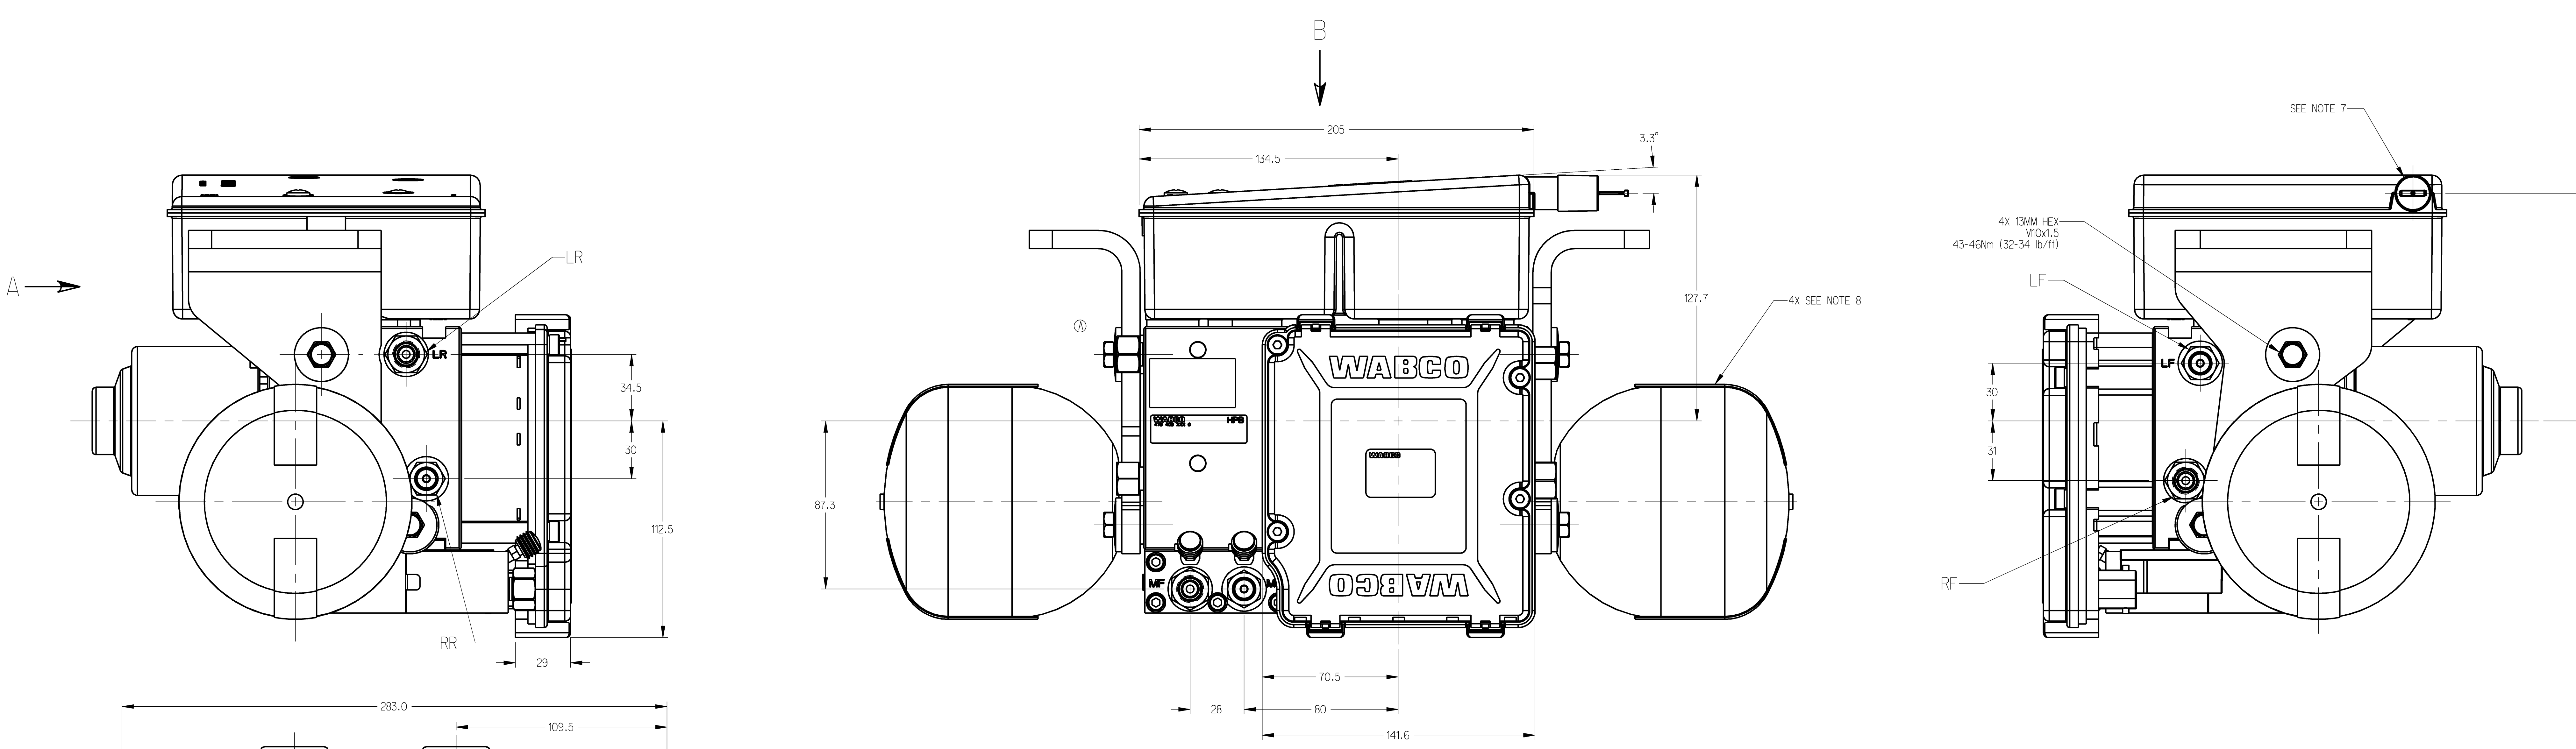

- NOTES:
- 1) THREAD PROTECTION CAPS TO BE REMOVED PRIOR TO INSTALLATION
 - 2) TECHNICAL DATA:
WORKING MEDIUM: BRAKE FLUID DOT 3, DOT 4, DOT 5.1 - FMVSS 116
FLUID TEMPERATURE: -40°C ... +85°C
AMBIENT TEMPERATURE: -40°C ... +85°C (MAX 2H 100°C)
INSTALLATION POSITION: HORIZONTAL
SOFTWARE VERSION: REFER TO DOCUMENT 400 851 030 O DOC CODE 987
ACCUMULATOR: 0.75L
WORKING PRESSURE: 130 ... 160 BAR
PRESSURE LIMIT: 210±30 BAR
STORABILITY: 9 MONTHS FOR DEVICES CLOSED WITH ORIGINAL PROTECTION CAPS.
THE DEVICE HAS TO BE FILLED WITHIN 96 HOURS AFTER UNPACKING.
NOMINAL VOLTAGE: 12^{2,4}/_{1,2} VDC
DEGREE OF PROTECTION: IP 66
 - 3) PORT IDENTIFICATION AND SIZE:
MF: MASTER CYLINDER FRONT AXLE
1/2"-20 UNF 2B
SW 3/4"
MR: MASTER CYLINDER REAR AXLE
7/16"-24 UNS 2B
SW 11/16"
LR: REAR AXLE - LEFT
1/2"-20 UNF 2B
SW 3/4"
RR: REAR AXLE - RIGHT
7/16"-24 UNS 2B
SW 11/16"
LF: FRONT AXLE - LEFT
7/16"-24 UNS 2B
SW 11/16"
RF: FRONT AXLE - RIGHT
1/2"-20 UNF 2B
SW 3/4"
 - 4) FOR ALL FURTHER TECHNICAL DATA REFER TO PRODUCT SPECIFICATION
478 407 100 O DOC 035
 - 5) DESIGN REFERRING TO THE FOLLOWING AMP CONNECTOR PN:
SUITABLE FOR PLUG ASSEMBLY ACCORDING TO PN: 1-953 042-6
 - 6) DESIGN REFERRING TO THE FOLLOWING AMP CONNECTOR PN:
SUITABLE FOR PLUG ASSEMBLY ACCORDING TO PN: 1-1452024-1
 - 7) HOSE CONNECTION: FOR HOSES WITH 16MM I.D. PROTECTION CAP
TO BE REMOVED PRIOR TO HOSE INSTALLATION.
 - 8) WARNING LABEL, LABEL TO READ AS FOLLOWS:
"WARNING
HIGH FLUID PRESSURE
TO AVOID PERSONAL INJURY OR POSSIBLE DEATH,
RELIEVE PRESSURE BEFORE REMOVING ACCUMULATOR.
REFER TO SERVICE MANUAL FOR FULL INSTRUCTIONS."

General Specifications: 400-534-1 - Size 150 16405 LP				Copyright WABCO®		WABCO®	
Further Technical Data				Date		Signature	
Doc. Code				2019-05-06		2019-05-06	
General Dimensions (mm)				2019-05-06		2019-05-06	
Range of Nominal Dimensions (mm)				2019-05-06		2019-05-06	
Mass				2019-05-06		2019-05-06	
Scale				2019-05-06		2019-05-06	
Material No.				2019-05-06		2019-05-06	
Date of first issue				2019-05-06		2019-05-06	
Doc. Code				2019-05-06		2019-05-06	
Language				2019-05-06		2019-05-06	
Sheet				2019-05-06		2019-05-06	
1/1				2019-05-06		2019-05-06	

400 851 019 O	VALVE, HYD MODULATOR ASSY, COMPACT UNIT, 500K		
400 851 018 O	VALVE, HYD MODULATOR ASSY, COMPACT UNIT, 500K	WITH ATC	
PART NUMBER	DESCRIPTION	NOTES	