
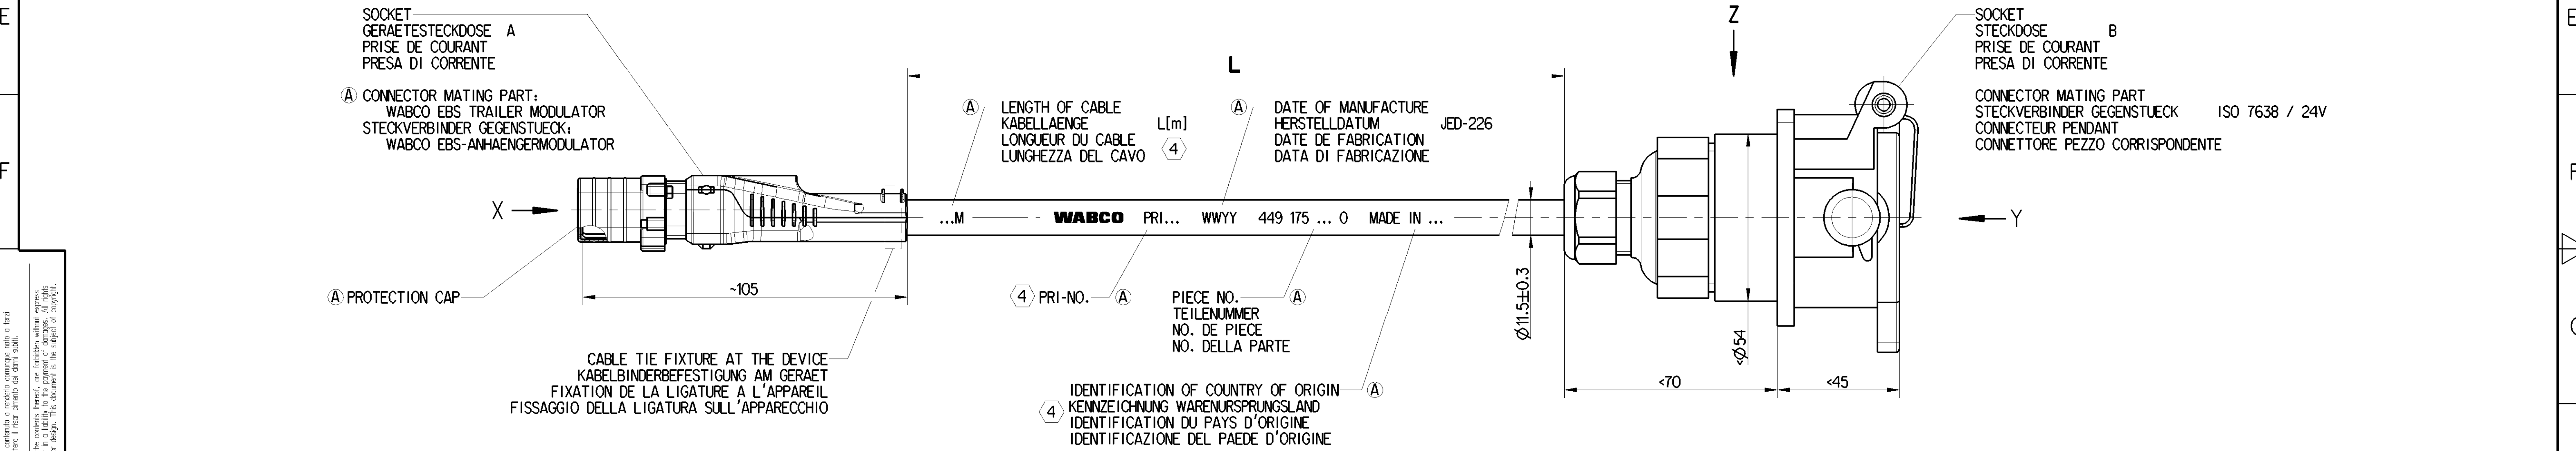


INSTALLATION INSTRUCTIONS FOR CABLES TO BE OBSERVED. SEE DOCUMENT :
EINBAUHNWEISE FÜR KABEL SIND ZU BEACHTEN. SIEHE DOKUMENT : 449 000 000 0 / 011
IL FAUT OBSERVER LES INDICATIONS POUR L'INSTALLATION DES CABLES. VOIR DOCUMENT :
SONO DA OSSERVARE GLI INDICAZIONI DI MONTAGGIO DEI CAVI. VEDERE DOCUMENTO :

Y
(COVER OPENED)
ISO 7638
VOLTAGE 24V
SPANNUNG
VOLTAGE
VOLTAGE
VOLTAGE

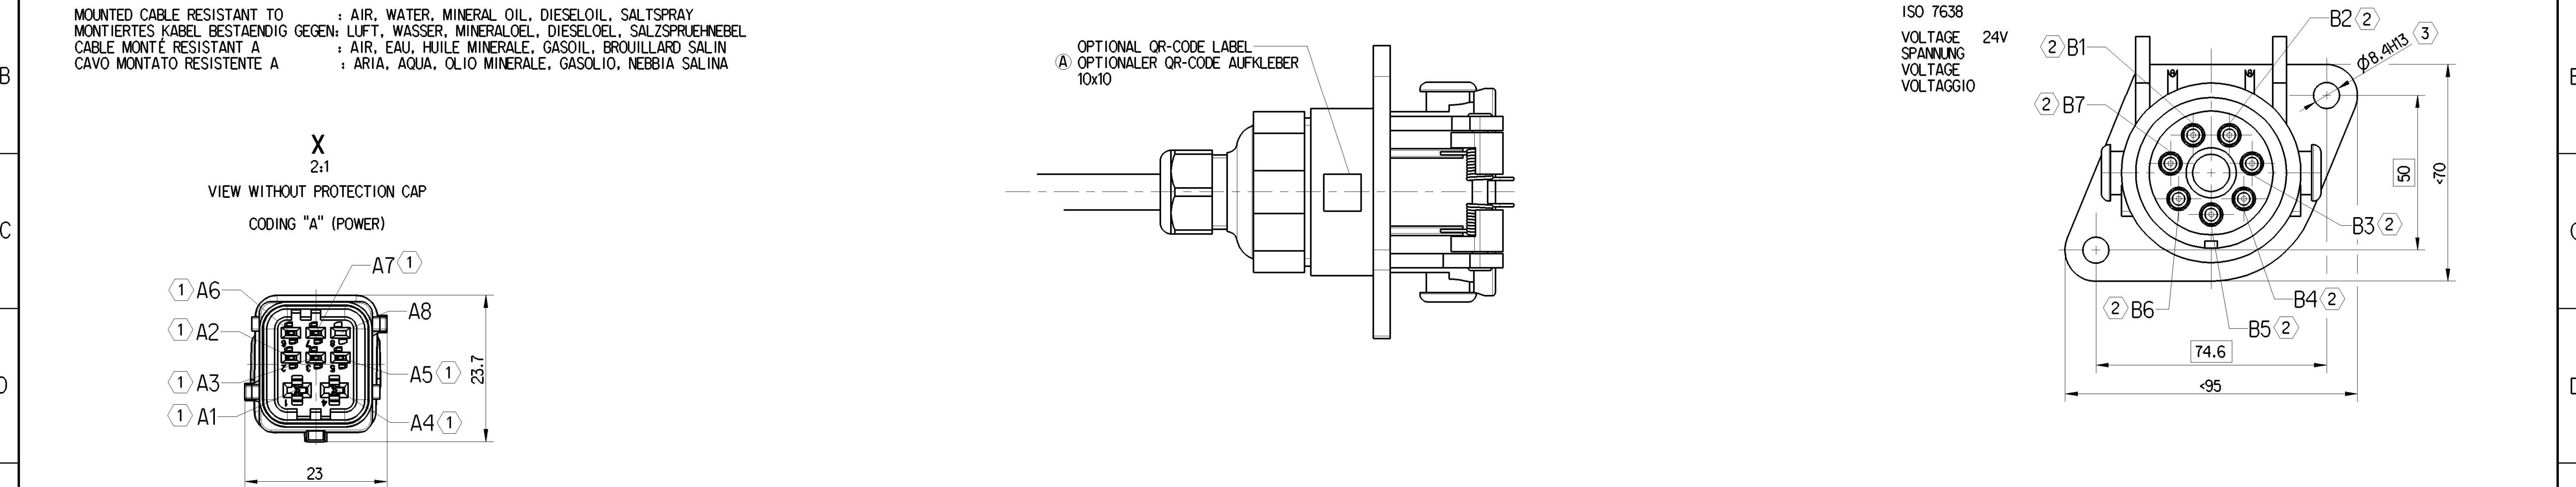

CHAMBER IN: KAMMER IN: CHAMBRE EN: CAMERA IN:	CROSS SECTION QUERSCHNITT SECTION DE TRANSVERSALE SEZIONE TRASVERSAL	CHAMBER IN: KAMMER IN: CHAMBRE EN: CAMERA IN:
1	4.0mm ²	1
2	1.5mm ²	2
3	1.5mm ²	3
4	4.0mm ²	4
5	1.5mm ²	5
6	1.0mm ²	6
7	1.0mm ²	7
8	NOT CONNECTED NICHT BELEGT NE PAS CONNECTÉ(E) NON COLLEGATO(ITA)	

CODE OF LENGTH LAENGCODIERUNG CODE DE LA LONGUEUR CODICE DEL LUNGHEZZA	PART NO TEILE NR. NO DE PIECE CODICE
449 175 □ □ □ 0	L [m]
EXAMPLE BEISPIEL EXEMPLE ESEMPIO	L = 12m 449 175 12 0
MIN/MAX LENGTH MIN/MAX LAENGE MIN/MAX LONGUEUR MIN/MAX LUNGHEZZA	L min = 0.2m L max = 18m
TOLERANCES TOLERANZEN TOLERANCES TOLERANZA	L ≤ 10m ±0.050m L > 10m ±0.075m

PRINTING ALLOWED ON THE OTHER SIDE OF THE CABLE

Ø8.4 H13

7-CORE CABLE: PVC
KABEL 7-ADRIG: 2x4mm²+3x1.5mm²+(2x1mm²)(CAN)
CÂBLE A 7 CONDUCTEURS:
CAVO A 7 CONDUTTORI:


SURFACE PROTECTION :
OBERFLÄCHENSCHUTZ :
PROTECTION DE SURFACE :
PROTEZIONE SUPERFICI :

FIELD OF APPLICATION : TRAILER
EINSATZBEREICH : ANHAENGER
DOMAINE D'APPLICATION: REMORQUE
CAMPO DI APPLICAZIONE: RIMORCHIO

THERMAL RANGE OF APPLICATION :
THERMISCHER ANWENDUNGSBEREICH: -40°C....+80°C
GAMME D'APPLICATION THERMIQUE:
CAMPO TERMICO D'APPLICAZIONE :

DEGREE OF PROTECTION (IN CONNECTION WITH PLUG):
SCHUTZART (IN VERBINDUNG MIT STECKER):
DEGRE DE PROTECTION (DANS CONNECTION AVEC FICHE):
GRADO DI PROTEZIONE (IN RELAZIONE CON SPINA):

CABLE COMPLY WITH ADR GUIDELINE FOR WIRING

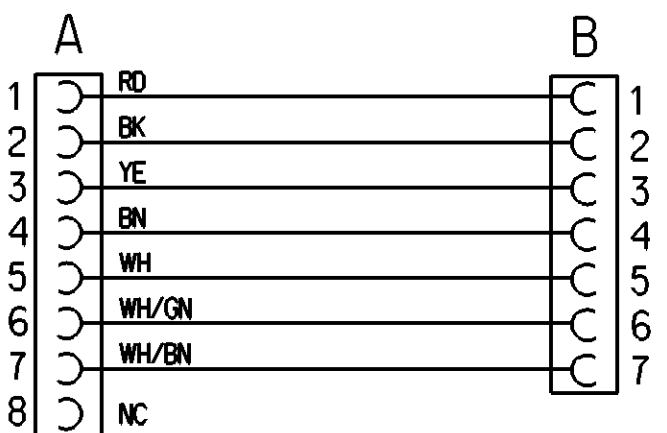

General Specifications JED-334-1 - Size ISO 14405 LP				Copyright WABCO®		WABCO		
Further Technical Data:		Date		Signature		SUPPLY CABLE VERSORUNGSKABEL CÂBLE D'ALIMENTATION CAVO DI ALIMENTAZIONE		
Doc. Code	Sheet	To	From	Checked	Expert	Material No.	Date of first issue	Doc.Code Language Sheet
				2021-03-25	Osiński	449 175 000 0	2018-06-07	053 ML 1/1
General Tolerances JED-261		Range of Nominal Dimensions (± mm)		Overage		507651 11x A 6930_WH 884 049 645 0		
Class	1)	≤ 50	> 50 ≤ 180	> 180 ≤ 400	> 400			
Fine		0.5	1.0	1.5	2.0			
Medium	x	1.0	2.0	3.0	4.0			
Coarse		2.0	3.5	5.0	6.5			
Tapped Holes acc.								
1) Tolerance Class Applied Crossmarked								