

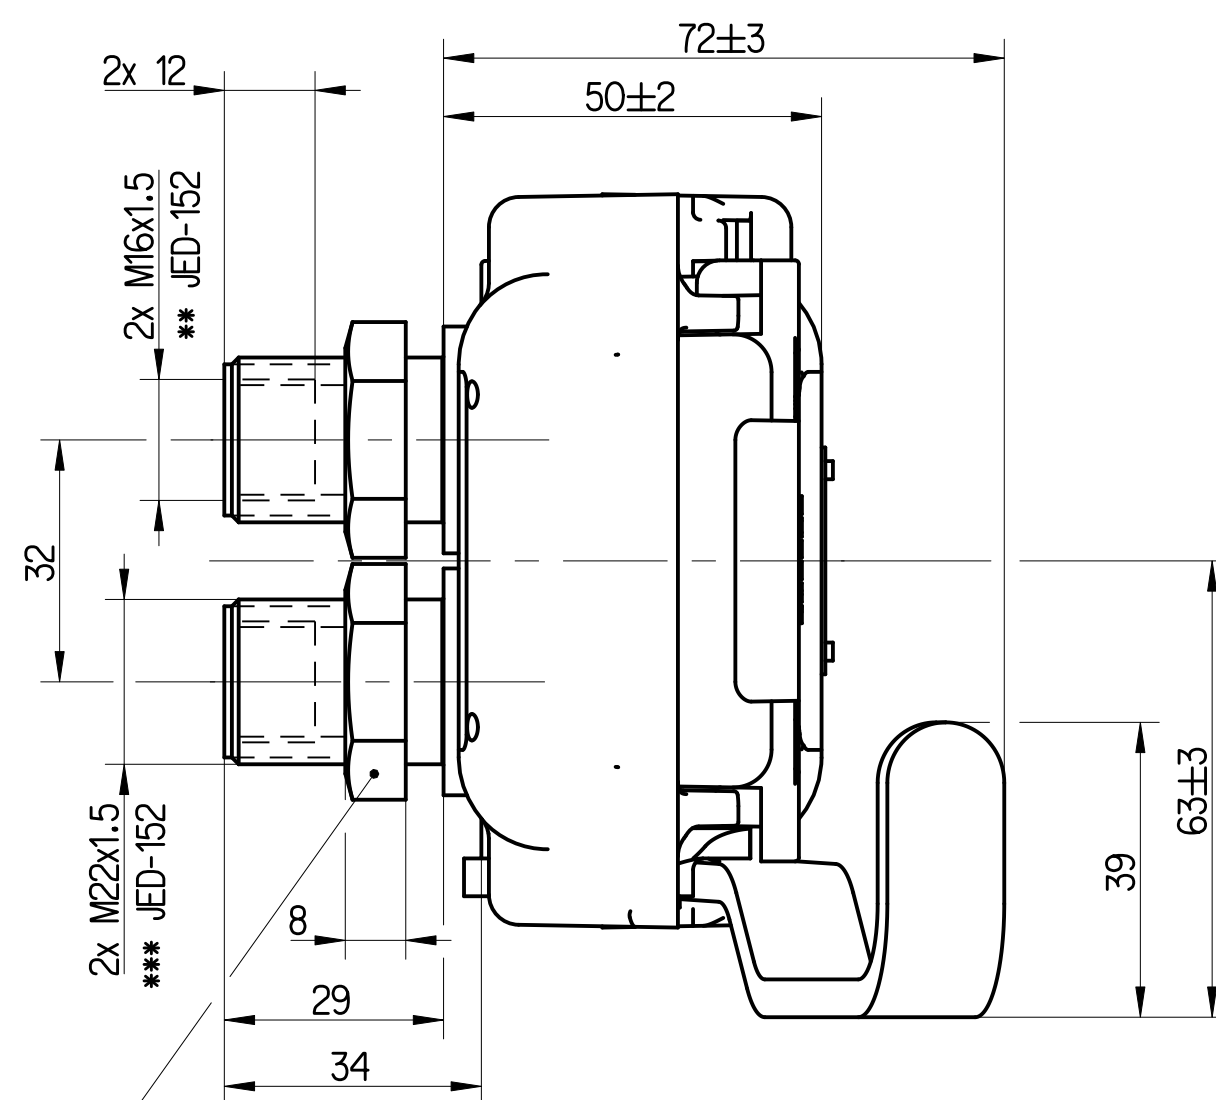
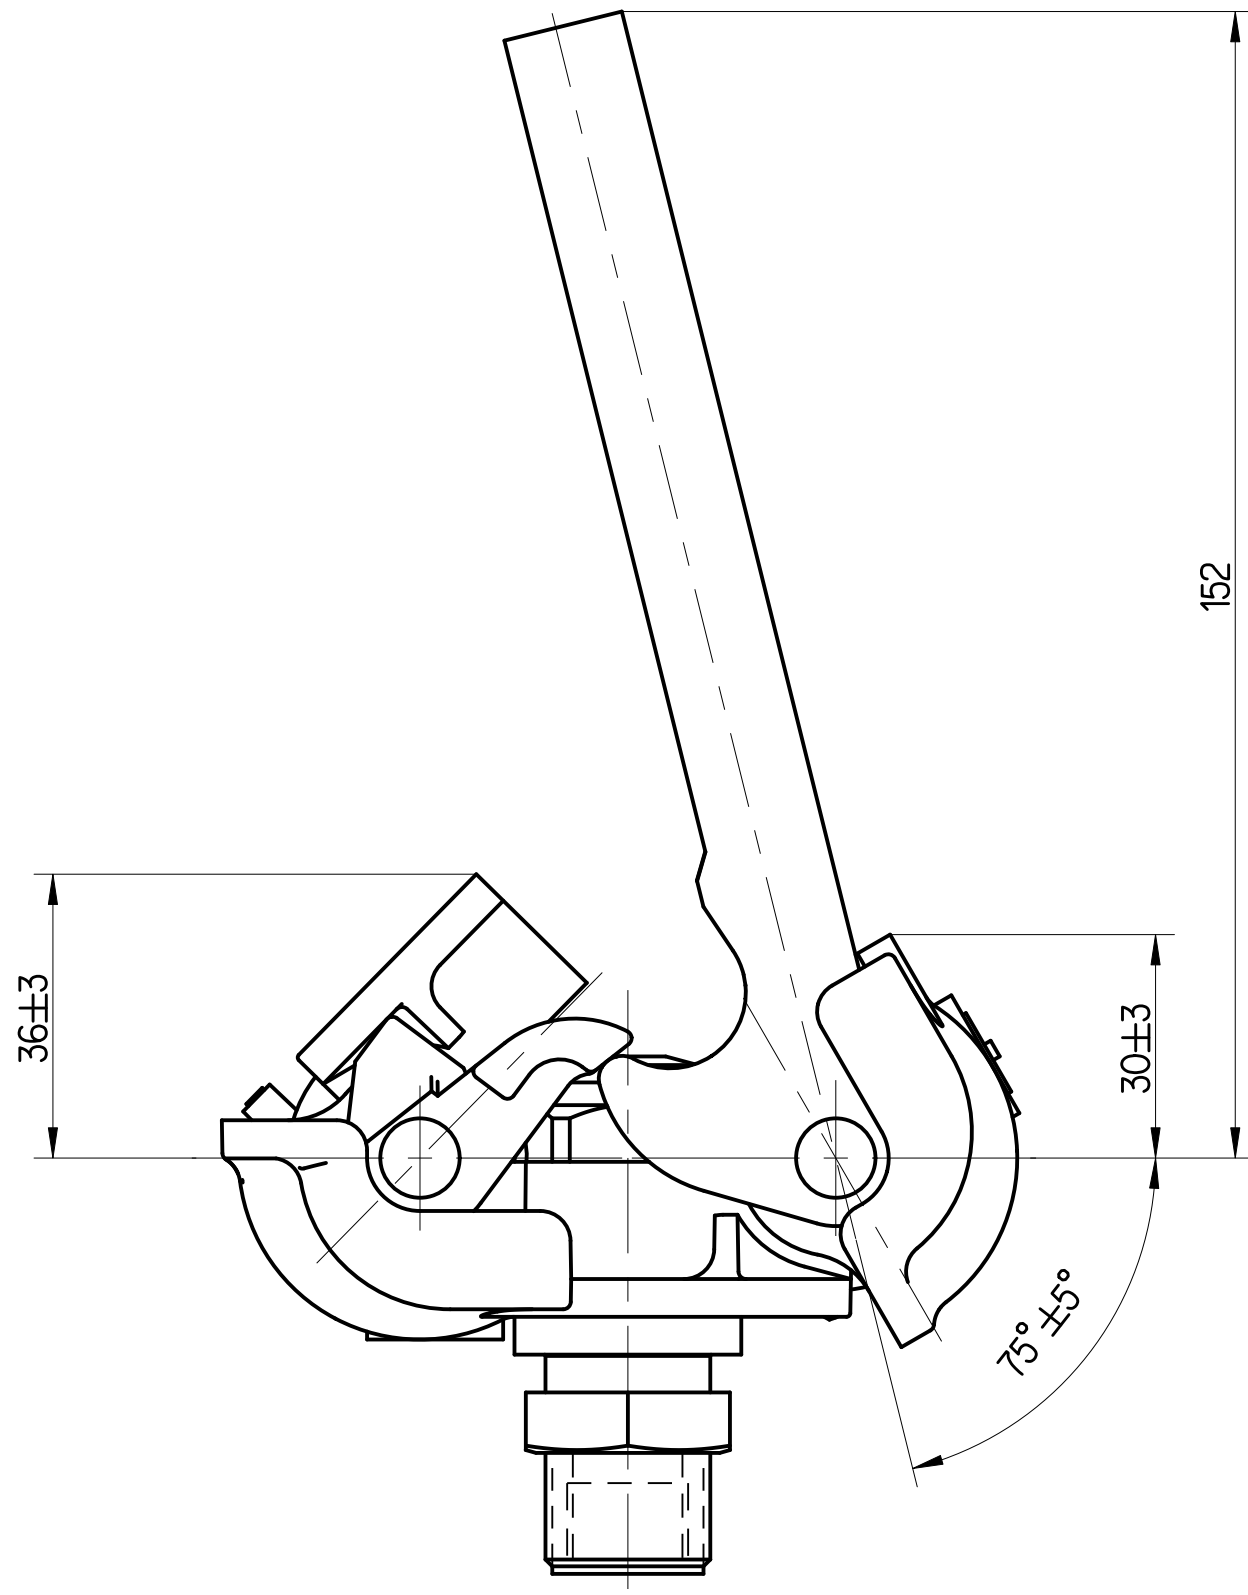
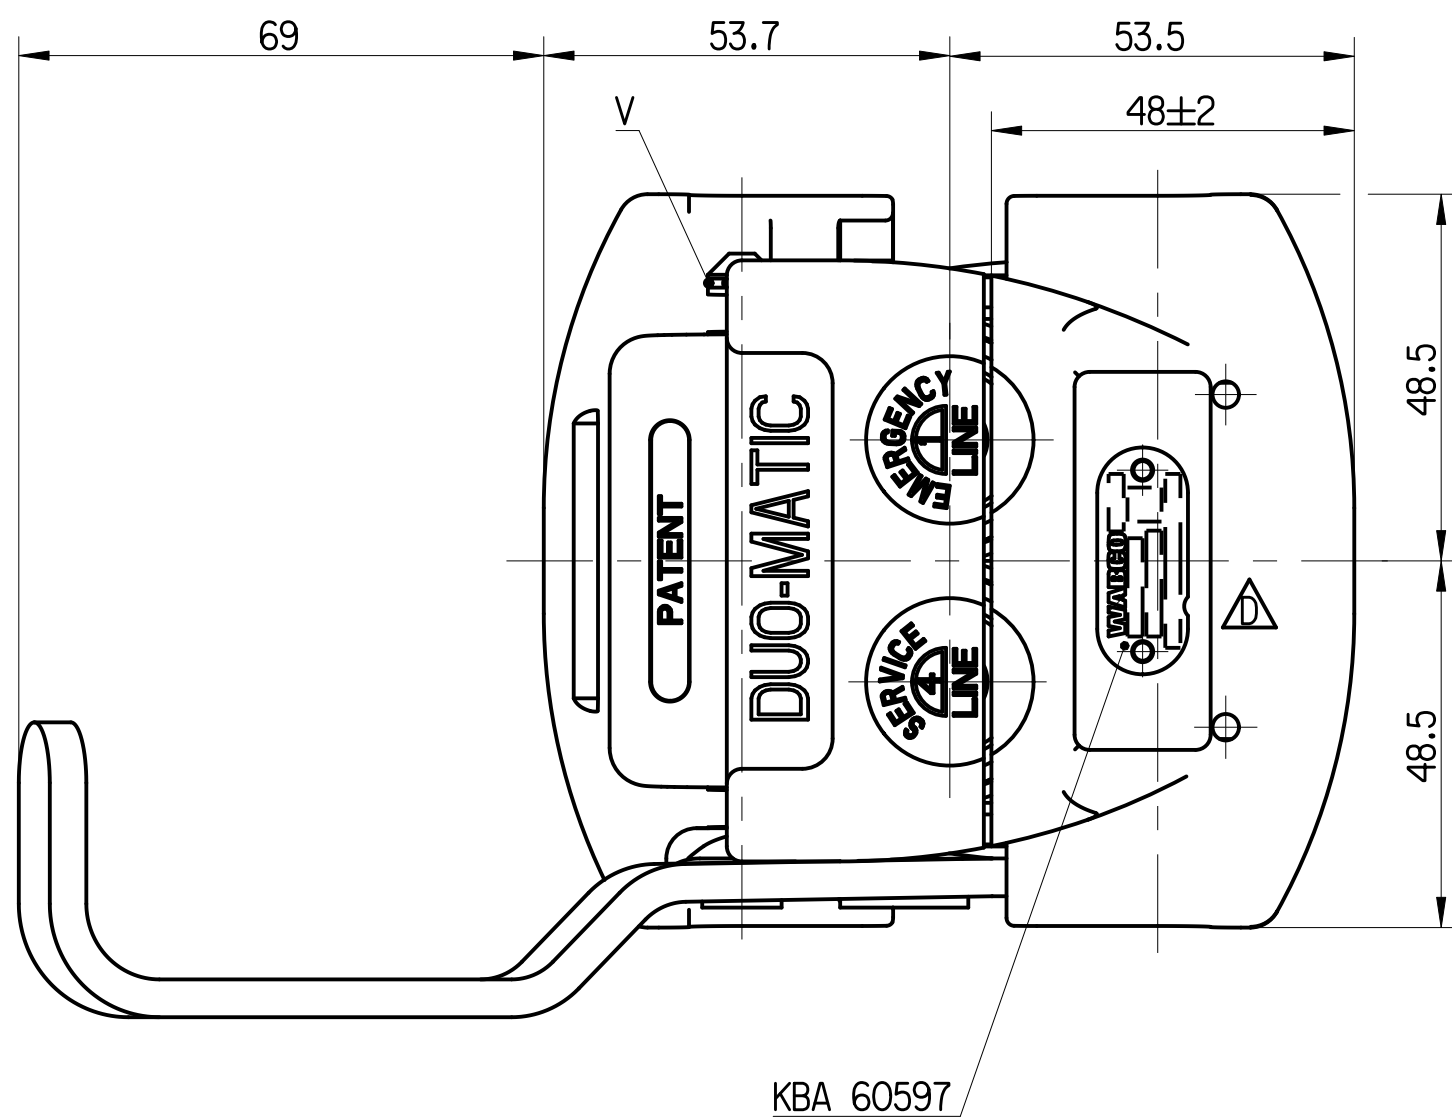


	1	2	3	4	5
A	WORKING MEDIUM ARBEITSMEDIUM FLUIDE D'UTILISATION FLUIDO DI ESERCIZIO		AIR LUFT AIR ARIA	(JED-848)	MATERIAL AND SURFACE PROTECTION I Al JED-029M1 C JED-259 II Fe JED-060M1 Zn/Fe JED-256-1
	SHORT TERM RESISTANCE TO HEAT KURZZEITIGE WAERMEBESTAENDIGKEIT RESISTANCE THERMIQUE TEMPORAIRE RESISTENZA TERMICA PER BREVE PERIODO		MAX. 1h AT 110°C		III Fe JED-004M C JED-260 IV Fe JED-020-1 Zn/Fe JED-256-1 V Fe JED-050MO Zn/Fe JED-256-1
B	THERMAL RANGE OF APLICATION TERMISCHER ANWENDUNGSBEREICH GAMME D'APPLICATION THERMIQUE CAMPO DI APLICAZIONE TERMICA		-40°C...+80°C		VI Fe JED-020-1 --- VII Fe 14H Zn/Al JED-378-4 VIII Fe JED-020-1 Zn/Fe JED-256-1
	WORKING PRESSURE (SUPPLY) BETRIEBSDRUCK (VORRAT) PRESSION DE SERVICE (ALIMENTATION) PRESSIONE DI ESERCIZIO (ALIMENTAZIONE)		10 BAR		
C	TORQUE ANZUGSMOMENT * (SW27) COUPLE DE SERRAGE COPPIA DI SERRAGGIO		45±5 Nm		
	TORQUE ANZUGSMOMENT ** (M16x1.5) COUPLE DE SERRAGE COPPIA DI SERRAGGIO		max.45 Nm		
D	TORQUE ANZUGSMOMENT *** (M22x1.5) COUPLE DE SERRAGE COPPIA DI SERRAGGIO		max.70Nm (EXCEPT SW27)		
	SERVICE CONDITION BETRIEBSART CONDITION DE SERVICE CONDIZIONE DI SERVIZIO		CONTINUOUS SERVICE DAUERBETRIEB SERVICE CONTINU SERVIZIO CONTINUO		
E	MAINTENANCE REQUIREMENTS WARTUNGSANFORUNGEN ENTRETIEN MANUTENZIONE		NONE KEINE NON NON		
	PORT FOR EMERGENCY ANSCHLUSS FUER VORRATSLEITUNG ORIFICE POUR LIGNE D'URGENCE ORIFIZIO PER LINEA D'EMERGENZA		1		
	PORT FOR SERVICE LINE ANSCHLUSS FUER BREMSLEITUNG ORIFICE POUR SERVICE LIGNE ORIFIZIO PER SERVIZIO LINEA		4		

INSTALLATION POSITION RANGE EINBAULAGEBEREICH POSITION D'INSTALLATION GAMME POSIZIONE DI MONTAGGIO CAMPO			MAX±30°
SCALE 1:2			

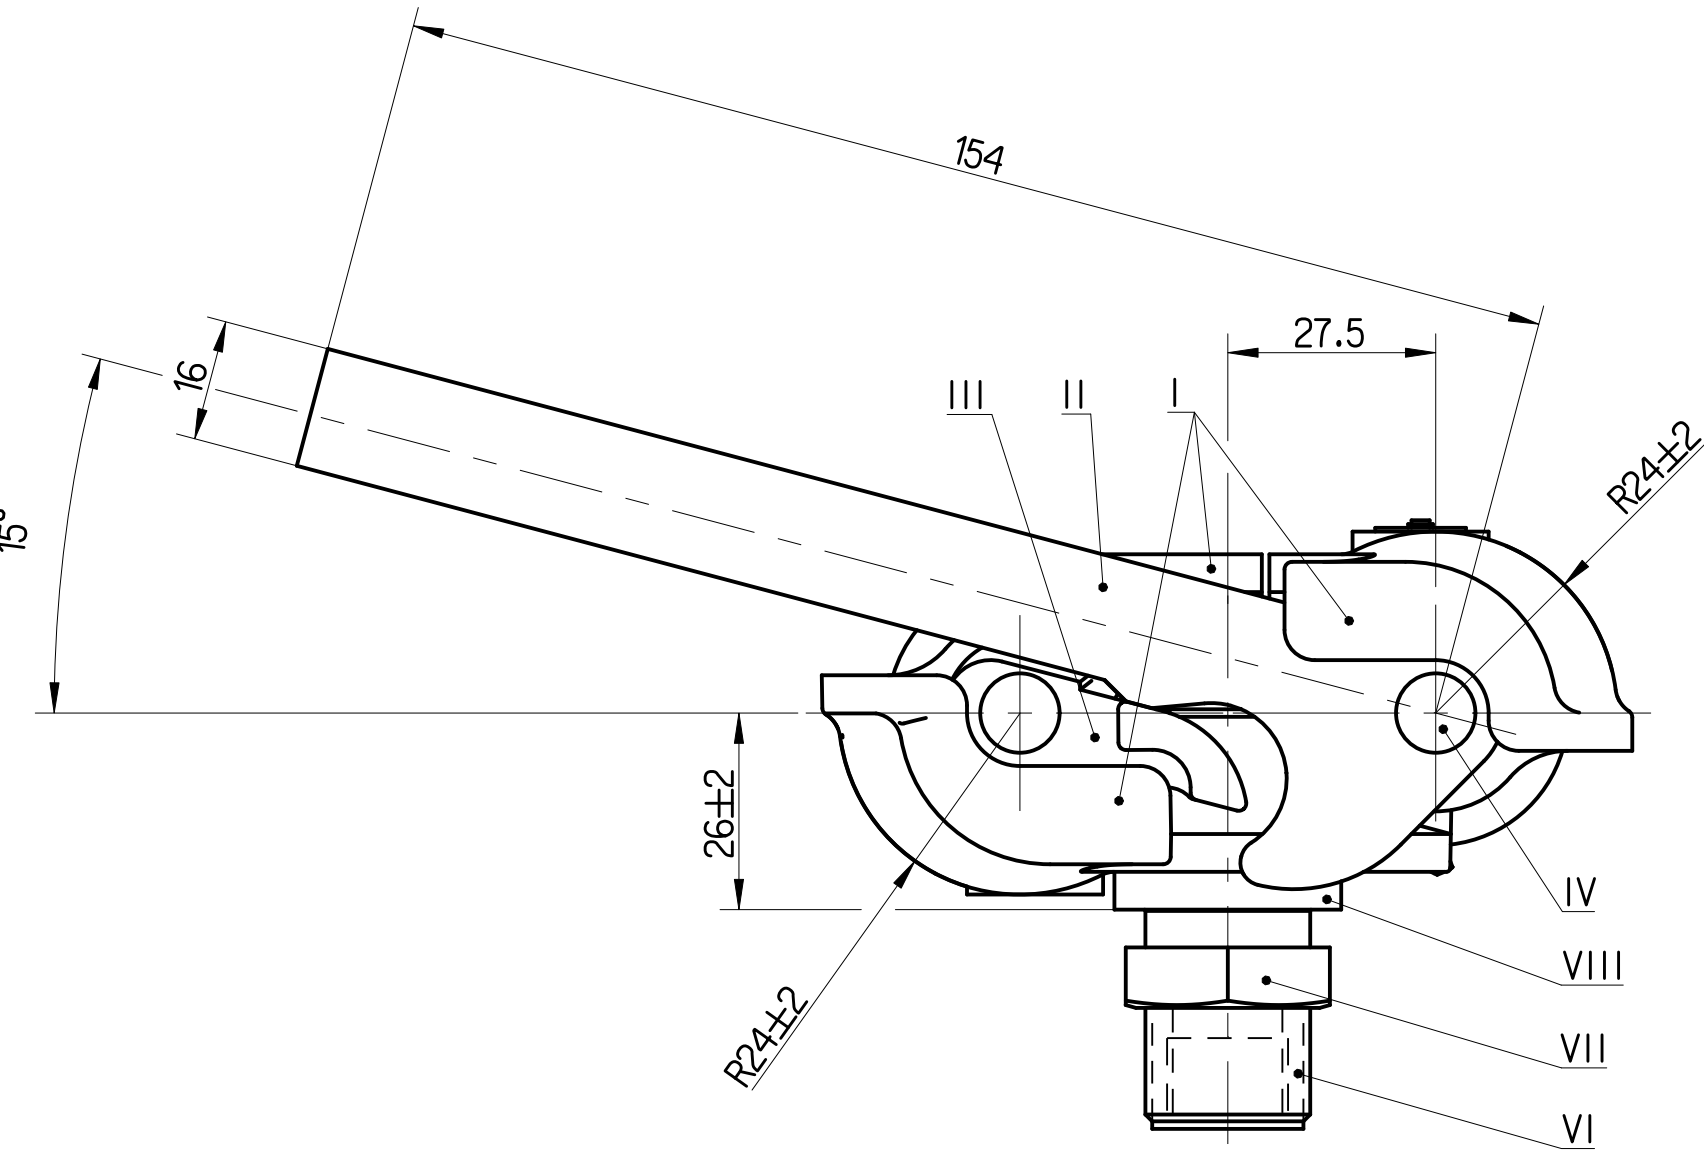

* WIDTH ACROSS FLATS
SCHLUESSELWEITE SW27
SURPLATS
LARGHEZZA IN CHIAVE

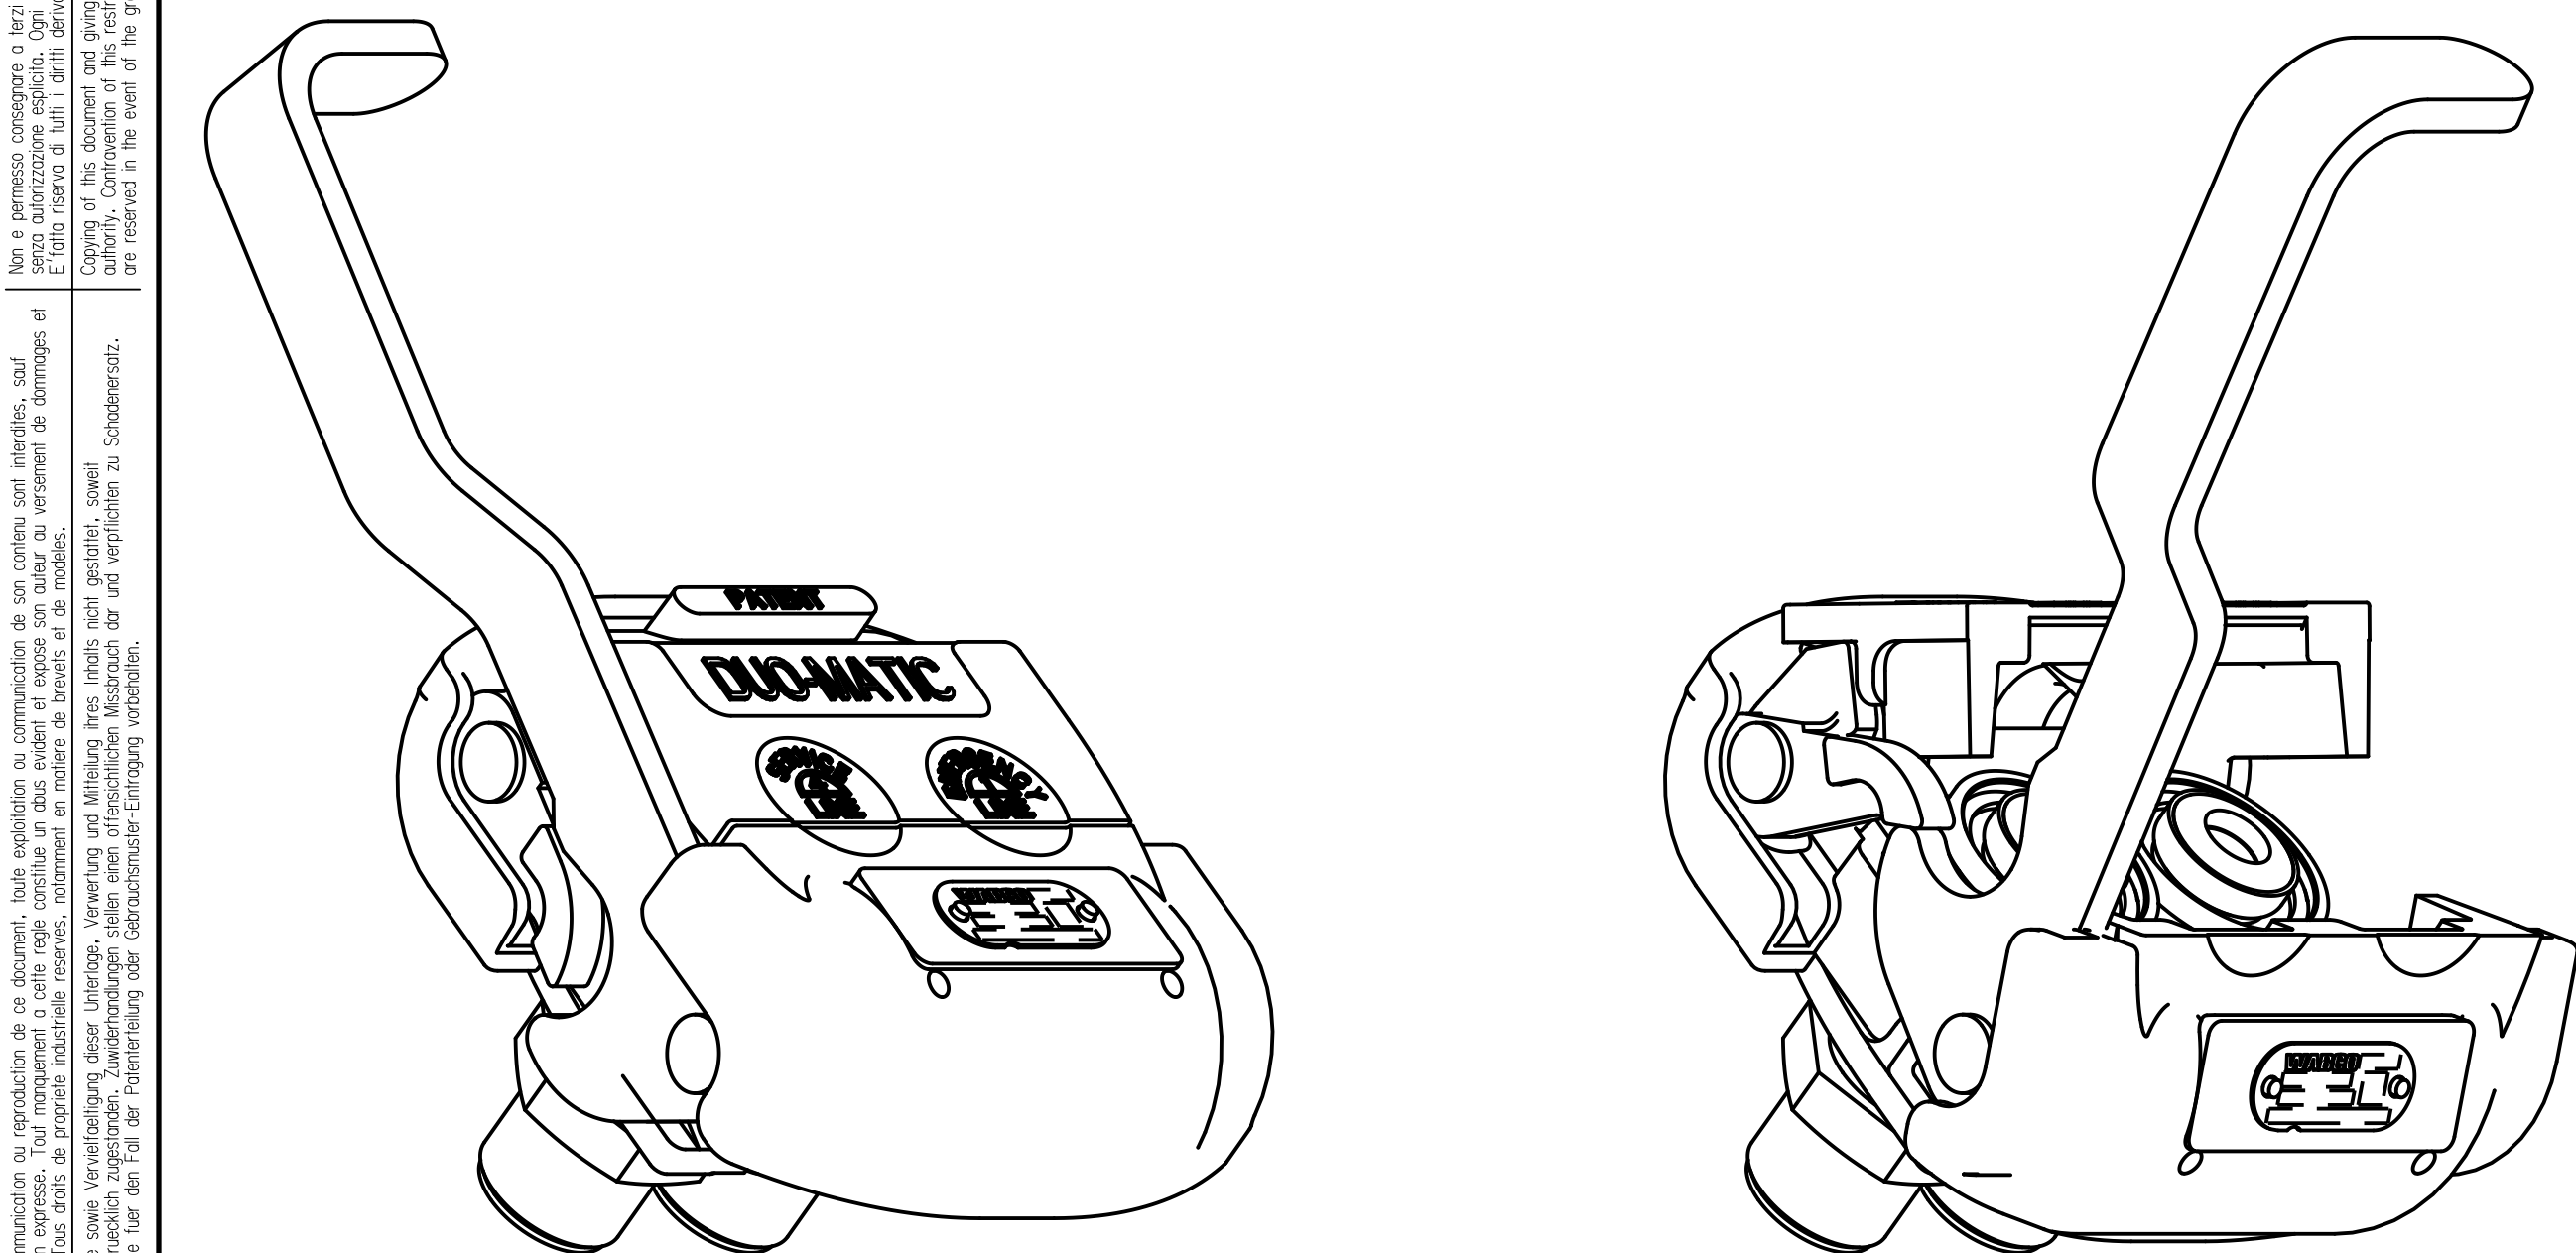

General Specification: ISO 8075, JED-334-1, Size ISO 14405 LP		Copyright ZF®	
Further Technical Data:		Date	Signature
Doc. Code	Sheet	Drawn	
General Tolerances JED-261		2026-04-30	Szyska
Range of nominal dimensions in mm		Checked	Bulaj
Class	1) ≤ 50 > 50 > 180 > 400		
Fine	±0.5 ±1 ±1.5 ±2		
Medium	±1 ±2 ±3 ±4		
Coarse	±2 ±3.5 ±5 ±6.5		
Tapped Holes acc. ISO 4039 / JED-152			
1) Tolerance Class Applied Crossmarked			
		Material No.	Date of first issue
		452 802 007 0	005 ML 1/1
		EDM No.	Revision
		519463	2 x D
		Techn. Resp.	5711
		Replacement for	
		890 158 412 0	