

TEBS-E-GIO-Parameter

GIO-1 : Pin 1, 3 = Zwangssenken 2.LA(FL-2); Anfahrhilfe (TH)

GIO-2 : Pin 1+4 = ECAS Magnetventil (HEBEN/SENKEN)

GIO-3 : Pin 1+4 = ECAS-Liftachsentil

GIO-4 : Pin 4 = ECAS-Wegsensor

GIO-6 : Pin 1 = LACV

SUBSYSTEMS = Bedienbox

ISO 7638 / 11992

ISO 12098


Schalter
Zwangssenken 2.LA

Anfahrhilfe (TH)
KL 15

Nur zur Information

11	1	MAGNETVENTIL HA		472 880 030 0	22						
10					21						
9	1	GIO-MAGNET-KABEL 2pol. 2m		449 443 020 0	20						
8	1	SUB-KABEL SMARTBOARD 12m.		449 911 120 0	19	2	DRUCKBEGRENZUNGSVENTIL 5,3bar *)		475 010 302 0		
7	1	GIO-MAGNET-KABEL 3pol. 3m		449 445 030 0	18	1	LUFTBEHÄLTER		950 0		
6	1	GIO-MAGNET-KABEL 3pol. 1m		449 445 010 0	17	1	ANLENKUNG		433 401 003 0		
5	1	LACVIC		463 084 100 0	16	2	ÜBERSTRÖMVENTIL 0,5bar m.R. *)		434 100 027 0		
4	1	GIO-KABEL 2-POLIG 6m		449 443 060 0	15	1	LACV 1-kreisig		463 084 041 0		
3	1	WEGSENSOR		441 050 100 0	14	1	ÜBERSTRÖMVENTIL 6,0bar o.R.		434 100 125 0		
2	1	SMARTBOARD		446 192 110 0	13	1	HEBEL f. WEGSENSOR		441 050 718 2		
1	1	TEBS-E-MODULATOR-Premium		480 102 06 . 0	12	1	GIO-WEGSENSOR-KABEL 3pol. 3m		449 811 030 0		
POS.	ST.	BENENNUNG		BEZEICHNUNG	POS.	ST.	BENENNUNG		BEZEICHNUNG		

*) Option

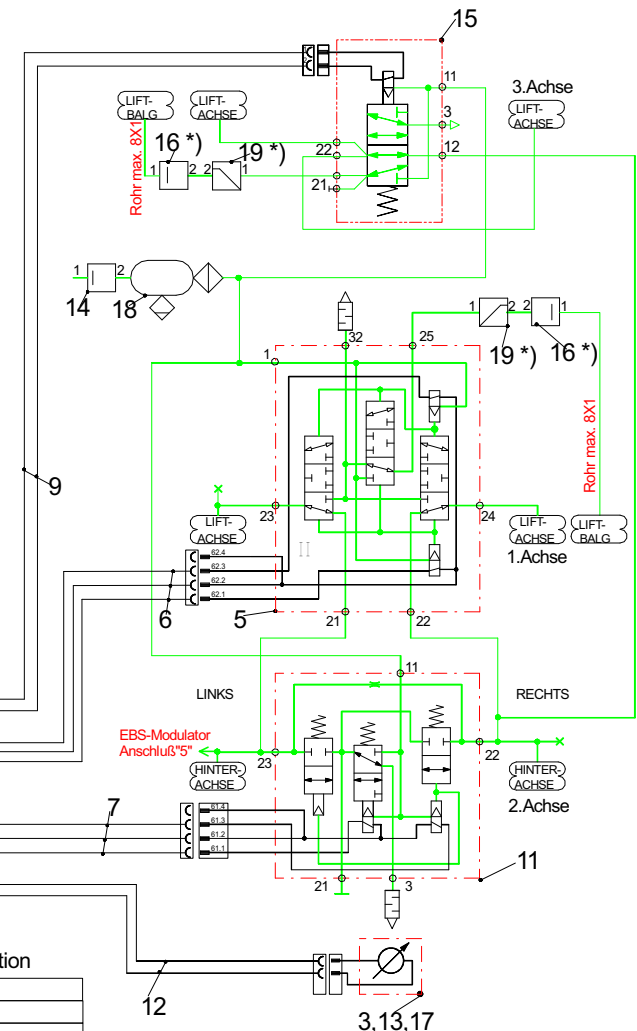

VERKABELUNGSSCHEMA TEBS-E5		WABCO	
DATE	SIGNATURE	VERKABELUNGS-SCHEMA-TEBS-E5	
15 - 12 - 18	W Riedel-Kujas	3-ACHS-SATTELANHAENGER	
		ECAS 1 WS mit 1.- u. 3.- Achse Liftachse	
		SMARTBOARD und Schalter 2. LA	
		(Liftachsesteuerung gem. RREG 97/27)	
PRODUCT IDENTIFICATION NO		841 802 125 0	
SIZE	A 3	FOR FILE RECORD	01
		H WR 01129	