

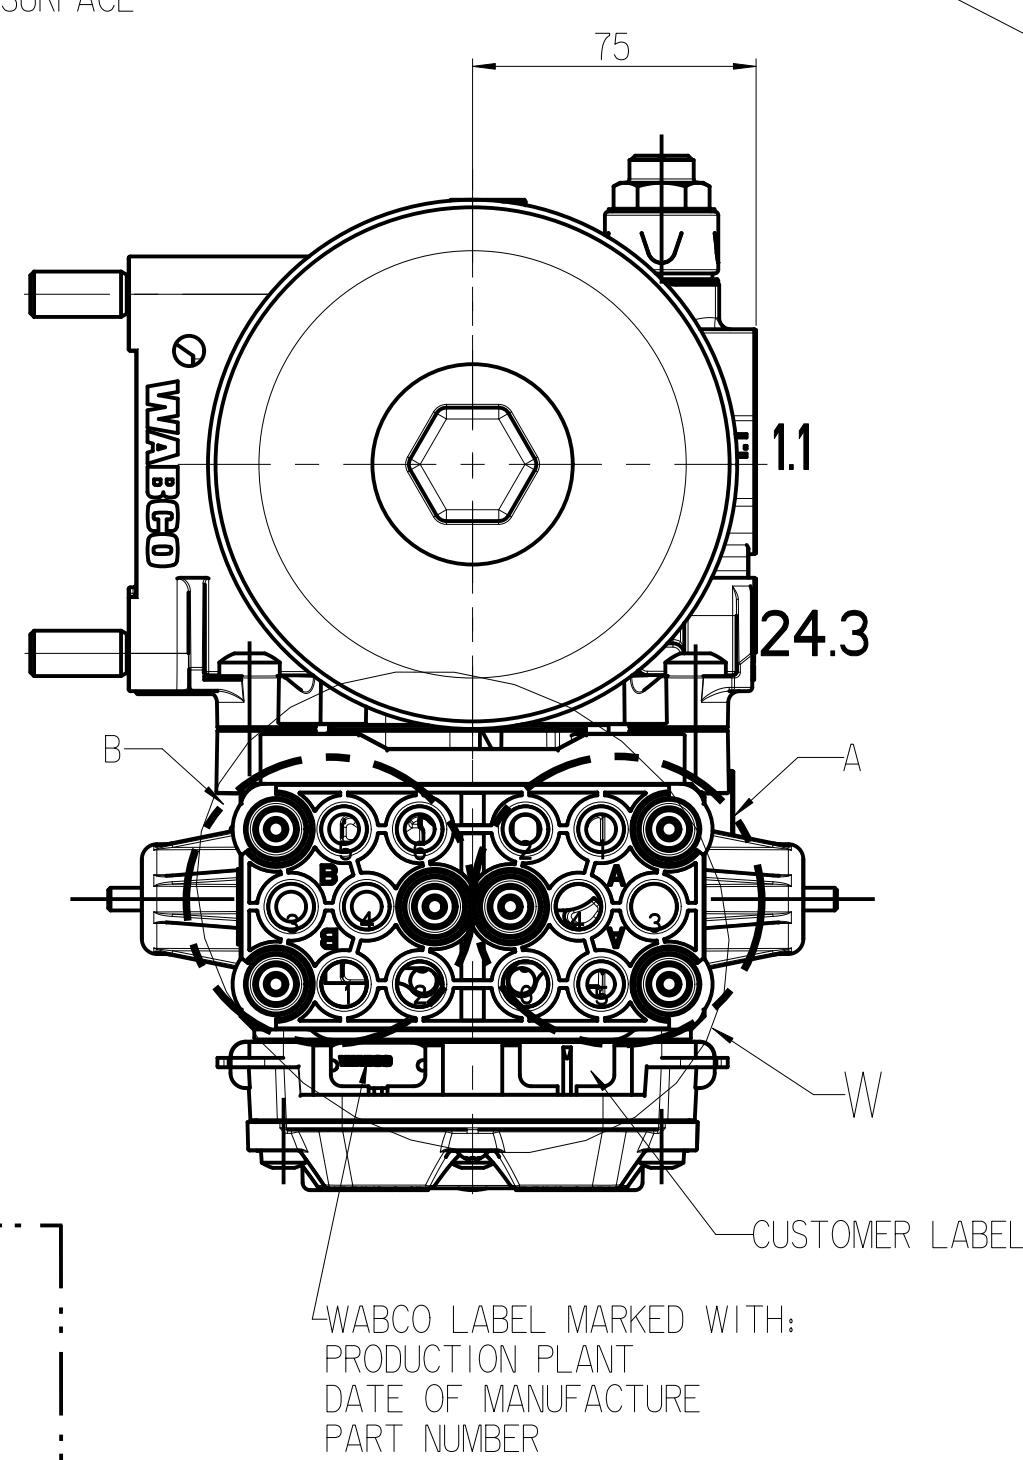
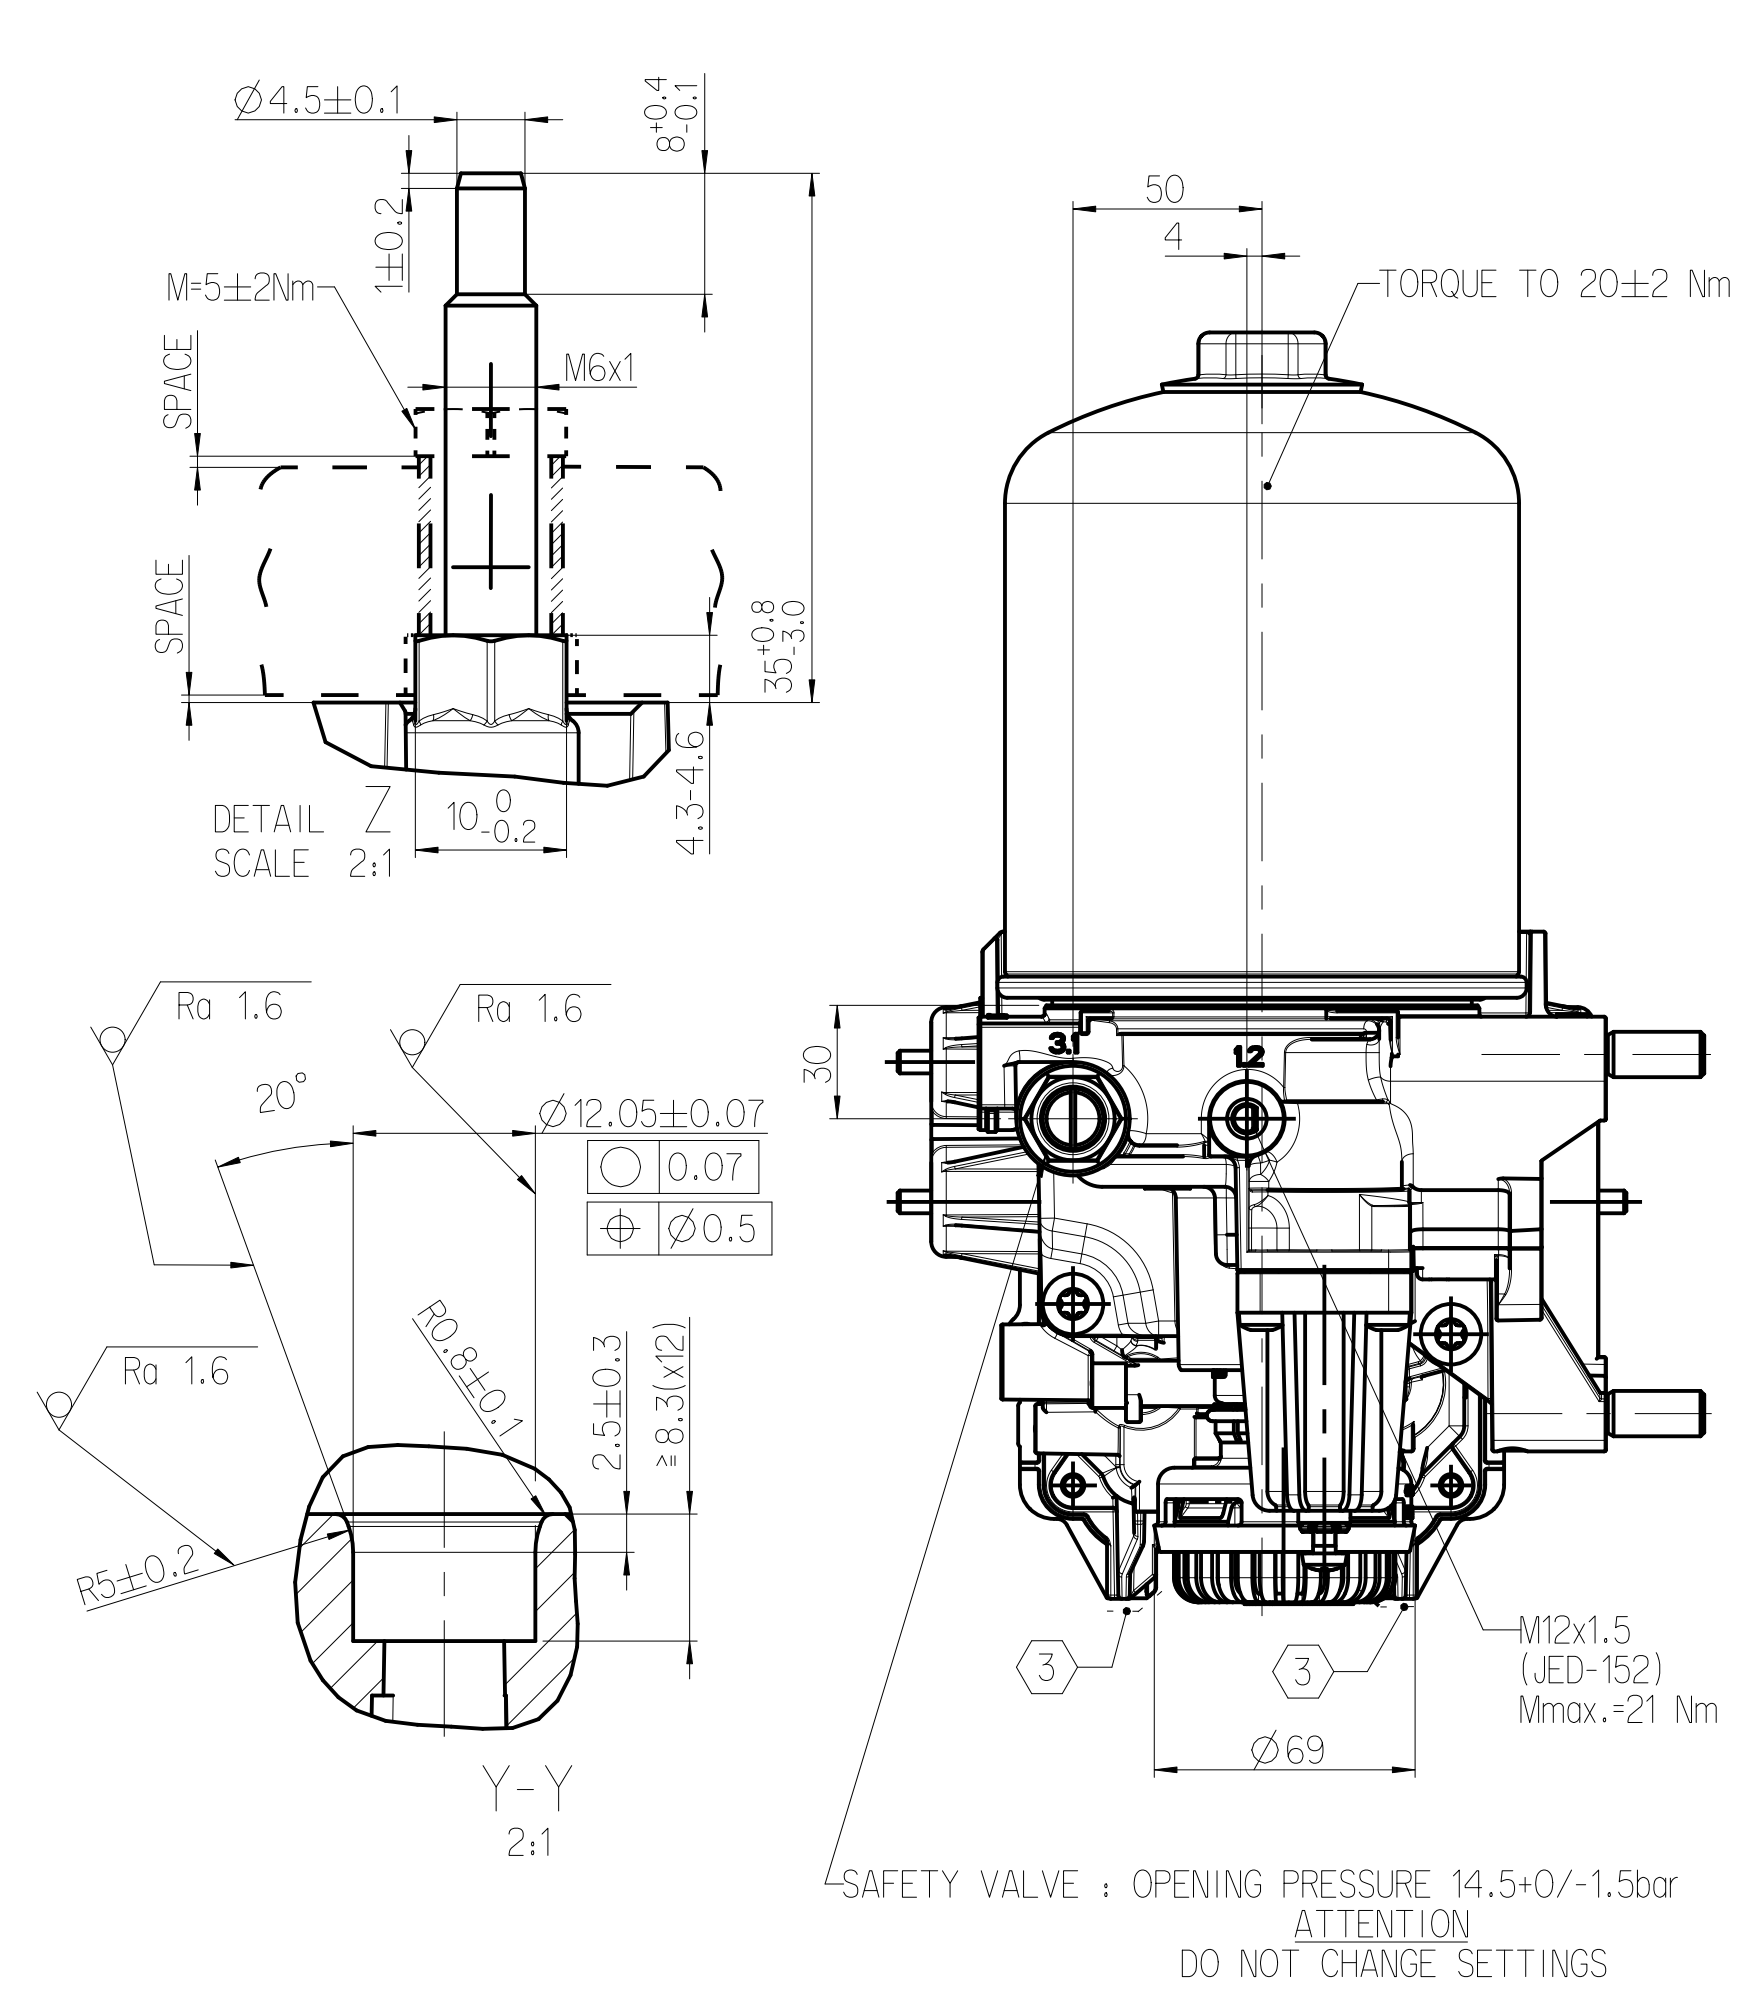
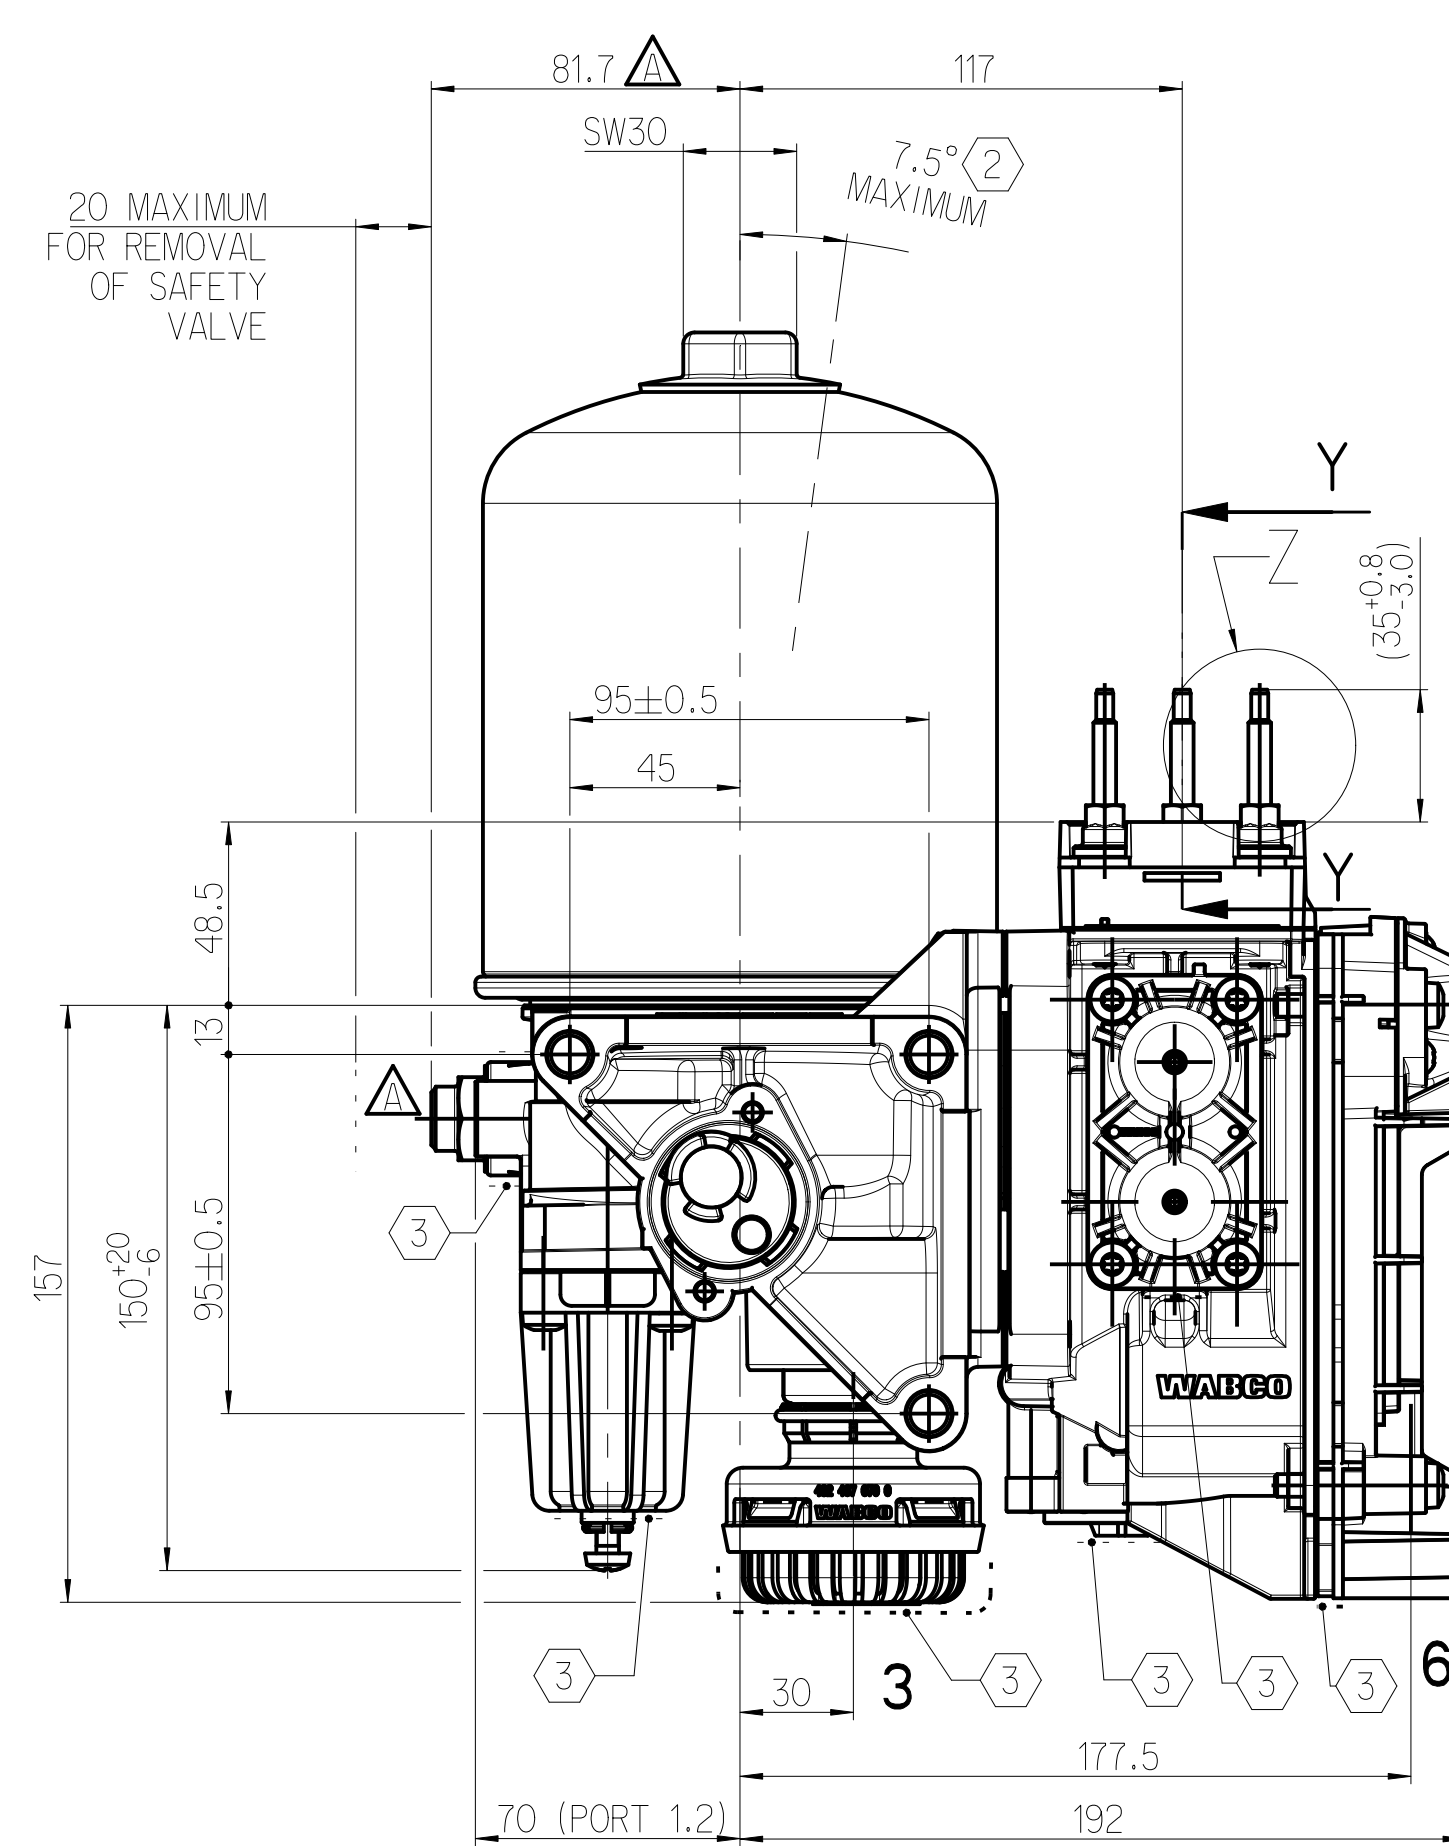
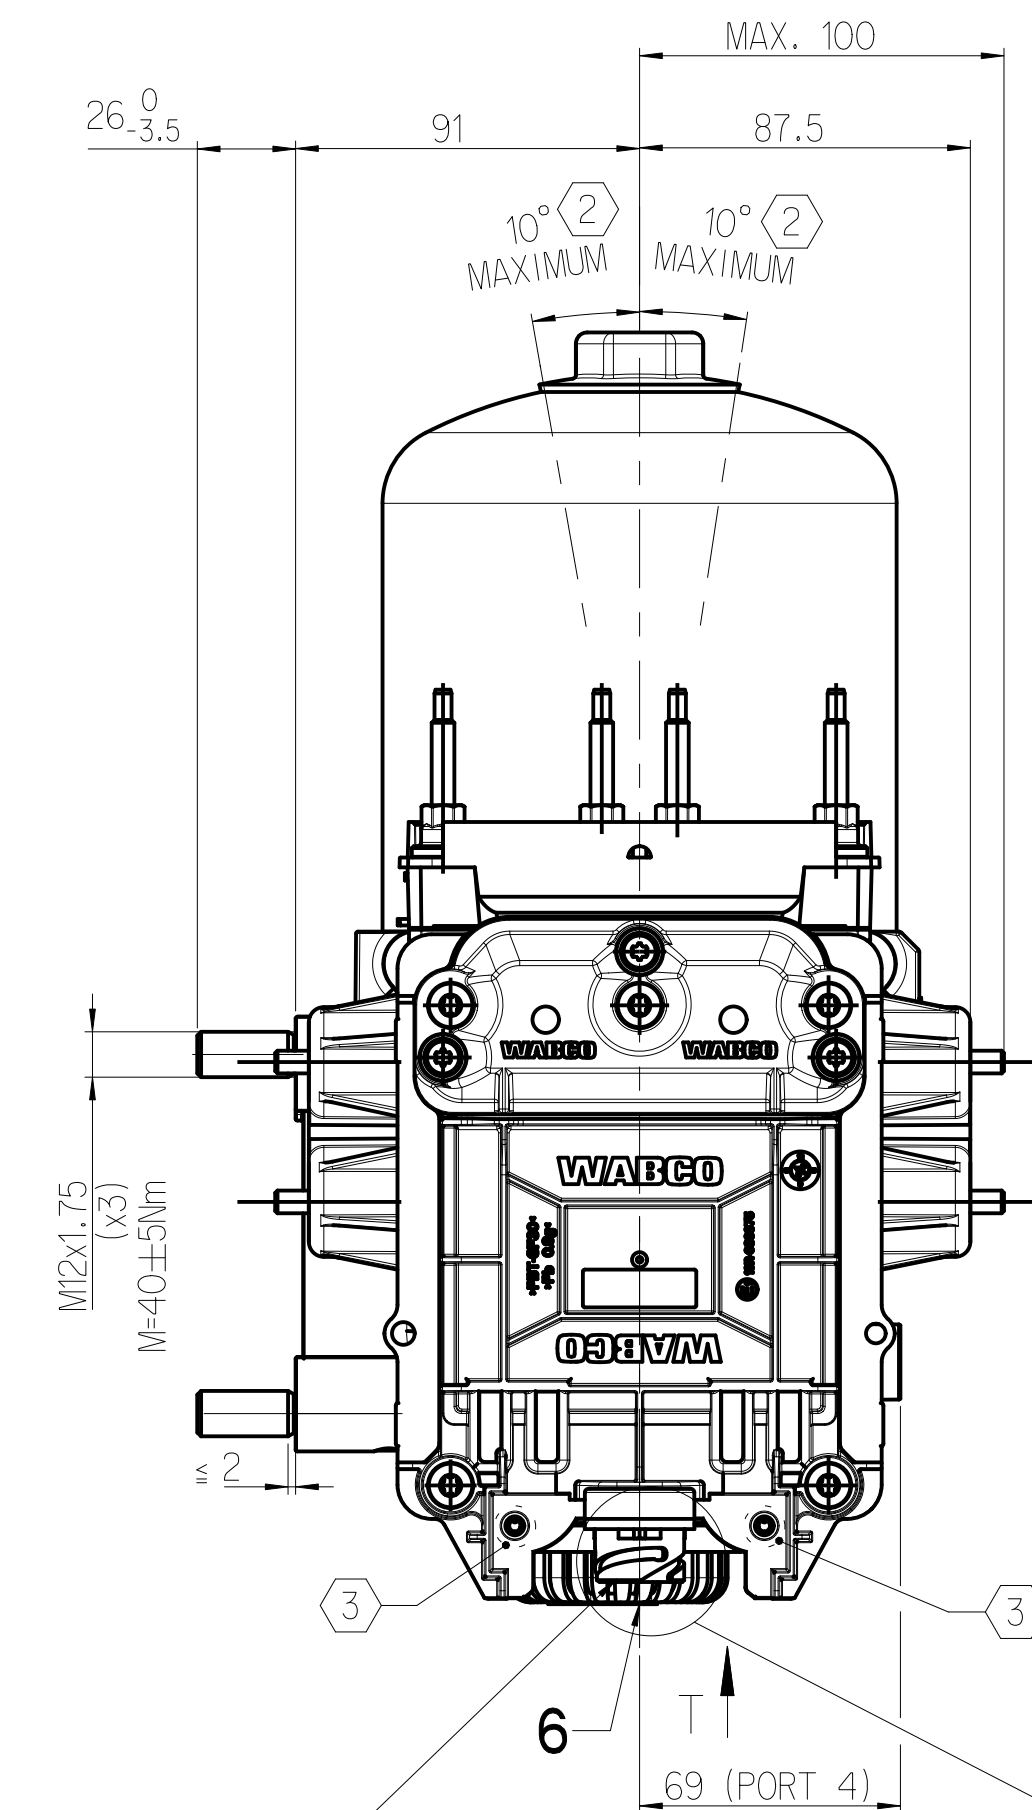
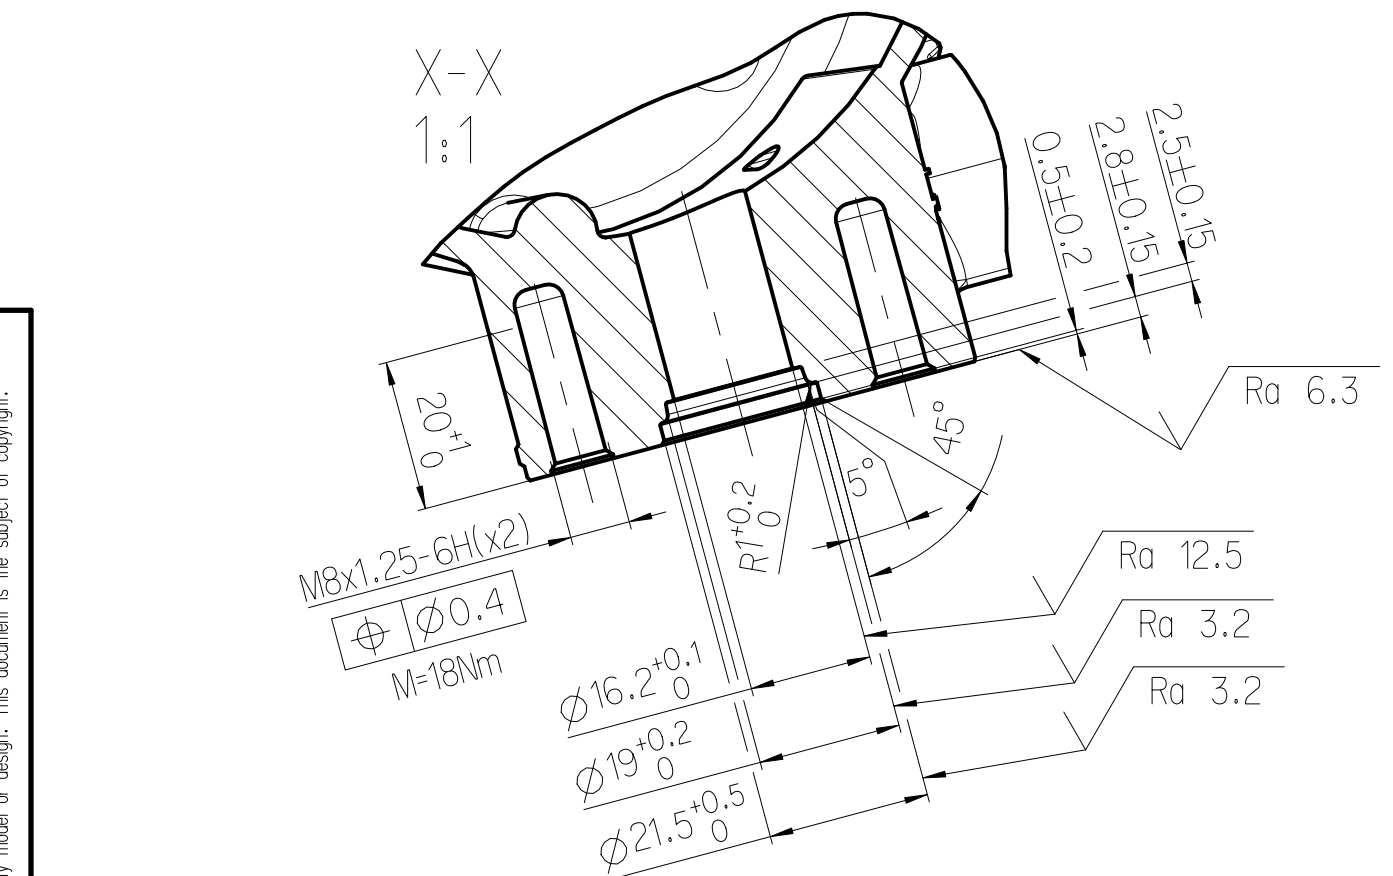


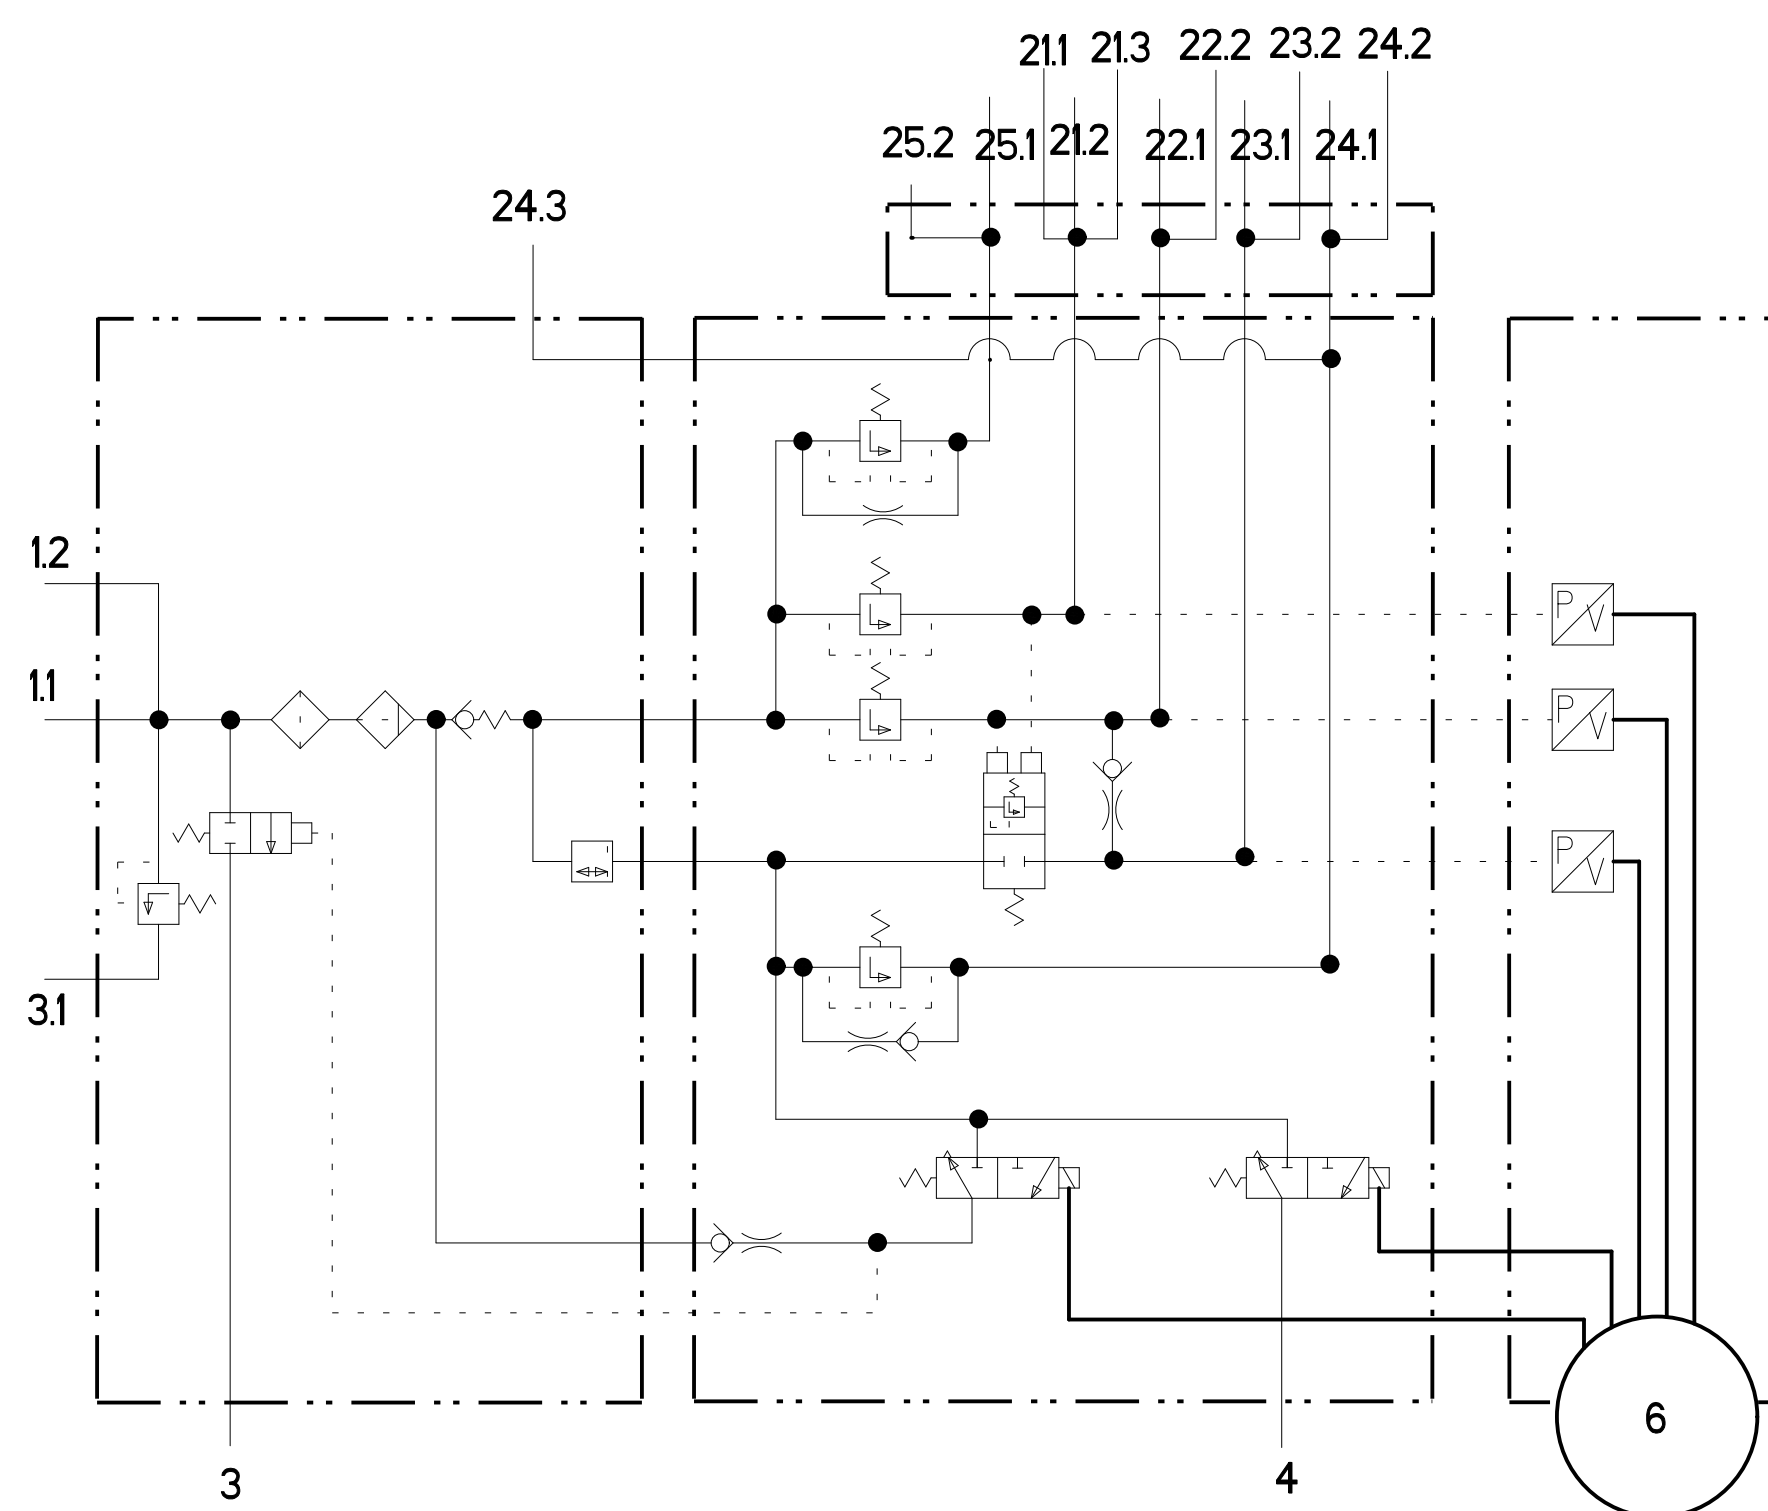

WABCO: 894 110 772 4		VIEW OF T
(DIN72585-A1-2.1-1-Sn/k2 CONNECTOR)		
PIN NUMBER	FUNCTION	
6.1	Vcc, BATTERY (24V)	
6.2	GROUND	
6.3	Vcc, IGNITION (24V)	
6.4	CAN HIGH	
6.5	CAN LOW	
6.6	N.C.	
6.7	N.C.	

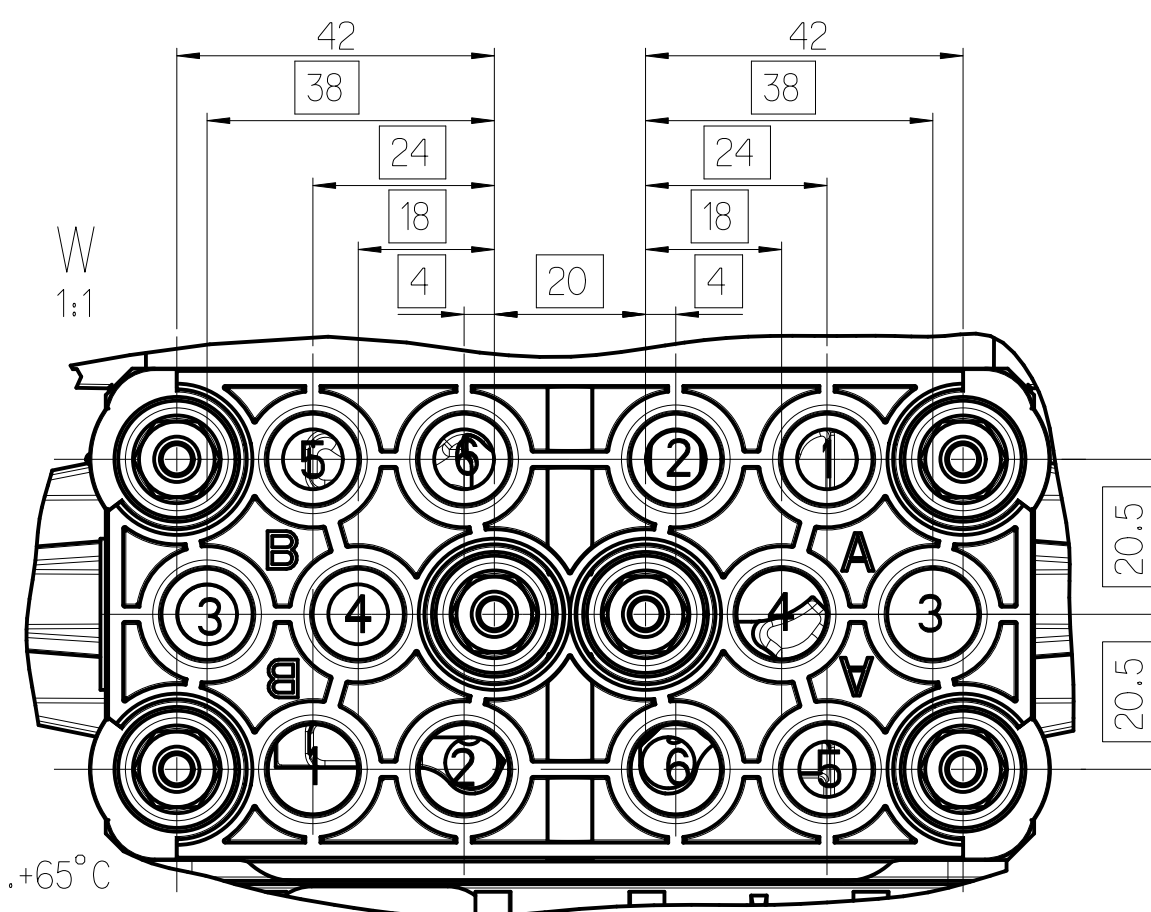

GENERAL NOTES:

OPTIMUM THERMAL RANGE OF CONTINUOUS APPLICATION: -40°C....+65°C
RESISTANCE TO HEAT: +80°C MAXIMUM

WORKING PRESSURE: 12.5bar MAXIMUM

MEDIUM: COMPRESSED AIR

3 BREATHING/EXHAUSTING AREAS MARKED: MUST NOT BE OBSTRUCTED

4 PLEASE DO NOT TOUCH THE MALE MULTIPOINT CONNECTOR CONTACTS

BOOTLOADER-SW (VERSION 1.0.0): 246 260 004 2

APPLIKATION-SW (VERSION 8.0.0): 246 260 007 2

FURTHER NOTES SEE PRODUCT SPECIFICATION DOC. CODE 435

TO KEEP TRACEABILITY OF PARTS SEE DOC. CODE 987

AIRDRYER						
PORT	FUNCTION	OPENING PRESSURE bar				
1.1	FROM COMPRESSOR	-				
1.2	EXTERNAL FILLING	-				
24.3	AUXILIARIES	-				
3	EXHAUST	-				
3.1	EXHAUST FOR SAFETY VALVE	14.5 +0/-1.5				
MULTI CIRCUIT PROTECTION VALVE						
PORT	FUNCTION	REF.	CIRCUIT	DYNAMIC OPENING bar (+0/-0.3)	STATIC CLOSING bar (≥)	PRESSURE LIMITING bar
25.1	AIR SUSPENSION	B5	5	8.5	-	-
21.1	SERVICE BRAKE	B3	1	7.5	4.5	-
21.2	SERVICE BRAKE	B1	1	7.5	4.5	-
25.2	AIR SUSPENSION	B6	5	8.5	-	-
23.1	PARKING BRAKE/ TRAILER	B4	3	6.5±0.5 AND 21±22≥7,2bar	4.5 ^{+1.5} _{-0.5}	8.4±0.1
21.3	SERVICE BRAKE	B2	1	7.5	4.5	-
24.1	AUXILIARIES	A2	4	7.5	4.5	8.4±0.1
22.1	SERVICE BRAKE	A4	2	7.5	4.5	-
22.2	SERVICE BRAKE	A6	2	7.5	4.5	-
24.2	AUXILIARIES	A1	4	7.5	4.5	8.4±0.1
NC	-	A3	-	-	-	-
23.2	PARKING BRAKE/ TRAILER	A5	3	6.5±0.5 AND 21±22≥7,2bar	4.5 ^{+1.5} _{-0.5}	8.4±0.1
4	COMPRESSOR CONTROL	-	-	-	-	8.4±0.1

General Specifications: ISO 80/5, JED-334-1, Size ISO 14405 LP				Copyright ZF®																
Further Technical Data:				Date	Signature															
Doc. Code:		Sheet:	To	Drawn																
General Tolerances JED-261				2025-11-26	Kurzyński	E-APU														
Range of nominal dimensions in mm				Checked																
<table><tr><td>≤ 50</td><td>$> 50 \leq 180$</td><td>$> 180 \leq 400$</td><td>> 400</td></tr><tr><td>± 0.1</td><td>± 0.15</td><td>± 0.2</td><td>± 0.3</td></tr></table>				≤ 50	$> 50 \leq 180$			$> 180 \leq 400$	> 400	± 0.1	± 0.15	± 0.2	± 0.3	2025-11-28	Kostrzewa					
≤ 50	$> 50 \leq 180$	$> 180 \leq 400$	> 400																	
± 0.1	± 0.15	± 0.2	± 0.3																	
Class 1)				274 x 213 x 336																
<table><tr><td>Fine</td><td>± 0.1</td><td>± 0.15</td><td>± 0.2</td><td>± 0.3</td></tr><tr><td>Medium</td><td>± 0.15</td><td>± 0.2</td><td>± 0.3</td><td>± 0.4</td></tr><tr><td>Coarse</td><td>± 0.2</td><td>± 0.3</td><td>± 0.5</td><td>± 0.6</td></tr></table>				Fine	± 0.1	± 0.15	± 0.2	± 0.3	Medium	± 0.15	± 0.2	± 0.3	± 0.4	Coarse	± 0.2	± 0.3	± 0.5	± 0.6	Dimensions in mm	
Fine	± 0.1	± 0.15	± 0.2	± 0.3																
Medium	± 0.15	± 0.2	± 0.3	± 0.4																
Coarse	± 0.2	± 0.3	± 0.5	± 0.6																
Tapped Holes only: -				Mass	Scale	Material No.														
				7.518 kg	1:1	Date of first issue 2009-12-08														
				Size	CAD System	Doc. Code Language Sheet														
				A 1	CRO	005 EN 1/1														
1) Tolerance Class Applied Crossmarked						ECh.No. 514732 Revision 2 x A Techn. Resp. 5112 Replacement for 932 510 004 0														

Non è permesso consegnare o terzi o riprodurre questo documento, né utilizzarne il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituirà un evidente abuso e comporterà il risarcimento dei danni subiti. E' fatto riserva di tutti i diritti derivanti da brevetti o modelli.

Toutle Communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation écrite préalable de l'éditeur. Toute réimpression ou utilisation non autorisée sans la permission écrite de l'éditeur est considérée comme une infraction et sera poursuivie conformément aux lois, décrets et ordonnances en vigueur. Toute réimpression ou utilisation non autorisée sans la permission écrite de l'éditeur est considérée comme une infraction et sera poursuivie conformément aux lois, décrets et ordonnances en vigueur.

402 A 1	Draw: 9325100050	0.4	4.2	In Work
---------	------------------	-----	-----	---------